

Model Z5758.236.00

"The Retrofit Pint®" 1/8 gpf, EcoVantage®, Ultra Low Consumption, Urinal System

TA		

Z5758.236.00 Series

- Zurn One ultra low consumption urinal system designed for optimal performance between Zurn fixture and Zurn flush valve to save water while exceeding industry performance standards
- 1/8 gallons per flush [0.5 Liters per flush]
- · Vitreous china
- · High efficiency washout flushing action
- Over 88% water savings over standard 1.0 gpf [4.0 Lpf] system
- Sensor operated battery powered actuation
- Universal Bracket and oversized footprint to make retro-fit easy
- 3/4" top spud
- 2" I.P.S. outlet flange and rubber gasket with integral trap
- 14" extended rim for handicap compliance when installed at proper height
- · Vandal resistant outlet strainer included
- Shipping Weight: 72 lbs.



Z5758 Series

ENGINEERING SPECIFICATION

Z5758.236.00 EcoVantage® Sensor Operated High Efficiency Urinal (HEU) System - System comes complete with exposed ZER6003AV-ULF-CPM high efficiency flushometer valve with sensor operated battery powered actuation and vitreous china urinal. The system is designed to perform to industry standards with as little as 1/8th gallon per flush [0.5 Lpf]. The valve is an exposed, quiet diaphragm-type, chrome plated flushometer valve with a polished exterior. Complete with Zurn's AquaVantage®TPE, chloramine resistant, filtered by-pass. This valve incorporates a 6VDC motor actuater, a battery powered automatic sensor, high impact resistant polycarbonate housing and chrome plated metal cover with manual override push buttom, high back pressure vacumm breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection, vandal resistant stop cap, sweat solder kit, and a cast wall flange with set screw. Vitreous china urinal is supplied with 3/4" top spud, 2" outlet connection, vandal resistant outlet strainer and universal retrofit hanger bracket.

This space is for Architectural/engineering Approval





This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

Fixture dimensions meet ANSI/ASME standard A112.19.2



and CAN/CSA B45 requirements.

In Canada - Consult local codes and standards.

EcoVantage® is a registered trademark of Zurn Industries All dimensions and specifications are subject to change without notice.

Zurn Industries, LLC

5900 Elwin Buchanan Drive, Sanford, NC U.S.A. 27330 · Ph. 1-800-997-3876, Fax 919-775-3541 In Canada | **Zurn Industries Limited**

7900 Goreway Drive Unit 10, Brampton, Ontario L6T5W6 \cdot Ph. 905-405-8272, Fax 905-405-1292

Rev.

Date: 10/27/2017 C.N. No. SAN007892 Prod. | Dwg. No. 317212




Model Z5758.236.00

"The Retrofit Pint®" 1/8 gpf, EcoVantage®, **Ultra Low Consumption, Urinal System**

TAG	
1417	
-1	

Rough-in dimensions for Z5758.236.00 series *Z5758 with Top Spud

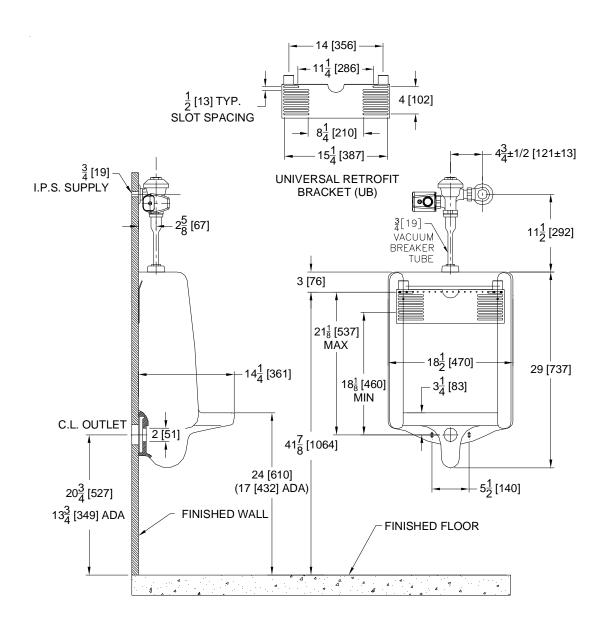

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements. Fixture dimensions meet ANSI/ASME standard A112.19.2



and CAN/CSA B45 requirements. In Canada - Consult local codes and standards.

EcoVantage® is a registered trademark of Zurn Industries All dimensions and specifications are subject to change without notice.



5900 Elwin Buchanan Drive, Sanford, NC U.S.A. 27330 · Ph. 1-800-997-3876, Fax 919-775-3541 In Canada | Zurn Industries Limited

7900 Goreway Drive Unit 10, Brampton, Ontario L6T5W6 \cdot Ph. 905-405-8272, Fax 905-405-1292

Rev.

Date: 10/27/2017 C.N. No. SAN007892

317212 Prod. | Dwg. No.

GreenSpec®

www.GreenSpec.com

LISTED