



SWAY CONTROL

FOR USE WITH TRAILERS

MODEL

- #48380 - (Right Hand Side)
- #48378 - (Right Hand Side)
- #48381 - (Left Hand Side)
- #48379 - (Left Hand Side)

WARNING: CAREFULLY READ THE FOLLOWING INSTALLATION INFORMATION.



Installation and Operating Instructions

! WARNING !

- SWAY CONTROL CANNOT BE USED ON TRAILERS WITH SURGE BREAKS.
- Trailer loading: Proper trailer loading is your first-line defense against dangerous instability and sway. Heavy items should be placed on the floor in front of the axle. The load should be balanced side-to-side and secured to prevent shifting. Tongue weight should be about 10-15 percent of gross trailer weight for most trailers. Too low a percentage of tongue weight can cause sway. Load the trailer heavier in front.
- The On/Off handle is an on/off device only. The Tensioning Screw is for adjustment.
- When towing during slippery conditions such as wet, icy, or snow covered roads or on loose gravel, turn On/Off handle counter-clockwise until all tension is removed from unit. Failure to do so could prevent tow vehicle and trailer from turning properly.
- Do not speed up if sway occurs. Sway increases with speed. Do not continue to operate a swaying vehicle. Check trailer loading, sway control adjustment, and all other equipment until the cause of sway has been determined and corrected.
- Never paint or lubricate slide bar.
CAMCO CANNOT BE HELD RESPONSIBLE FOR ANY DAMAGES DUE TO IMPROPER USE OR INSTALLATION ON THIS PRODUCT.

Tools for Installation


- Tape Measure
- $1\frac{1}{32}$ " Drill Bit
- Electric Drill
- Appropriate Safety Protection
- Arc Welder
- "C" Clamps
- Center Punch
- Torque Wrench
- Socket Set

NOTICE

If product components are missing or damaged do not return to dealer, contact the manufacturer.
1-800-334-2004 (ext. 237)




Parts List

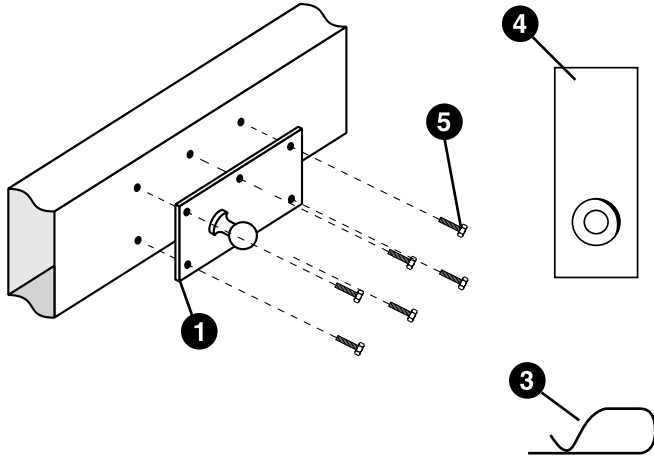


No.	Description	Qty.
1	48388 Trailer Tongue Ball Plate	1
2	48391 Slide Bar	1
3	48028 Spring Clip	2
4	48390 Sway Control Ball Plate	1
5	48389 Self Tapping Screw	6
6	48404 Ball, Lock Washer, Ball Nut	1

Right Hand #48380

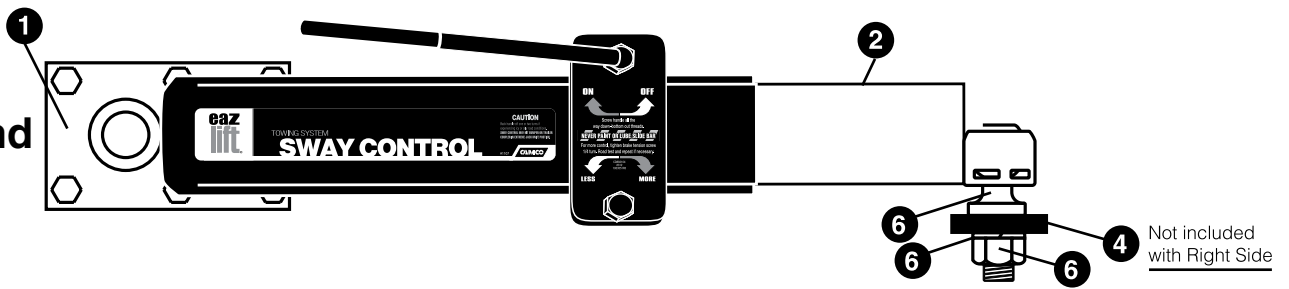

Left Hand #48381

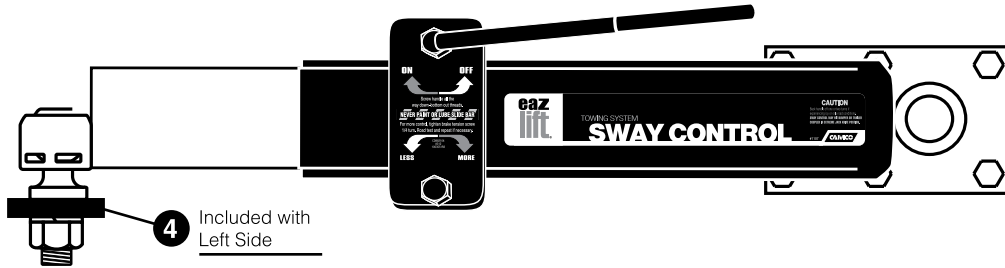

Installation

CAUTION: Wear appropriate safety equipment during installation: eye protection, gloves, welding clothes, etc.

Step 1: Connect Trailer to Tow Vehicle

Position vehicle and trailer in a straight line on a level surface.

Step 2: Mount Sway Control Ball to Hitch*

Mount sway control ball using nut and lock washer to hitch as shown in Figure 1 and torque to 100 ft-lbs. If necessary notch and weld sway control ball plate into position as shown. (Any welding should be done by a qualified welding professional.)

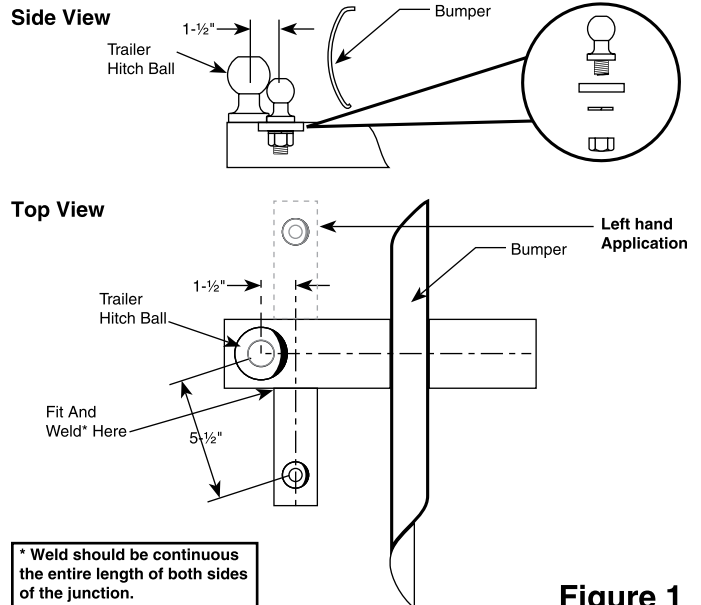


Figure 1

* For a bolt on solution for attaching sway control ball, See Camco Item #48386 (Sold separately).

Installation (Con't)

Step 3: Mount Ball Plate Assembly

- Measure and mark a point on the trailer tongue 24" from the center of the trailer hitch ball to the right side of the trailer frame for #48380 or left hand side of the trailer frame for #48381 to determine the location of the Trailer Tongue Ball plate as shown in Figure 2.
- Align the center of the ball on the Trailer Tongue Ball Plate with the 24" mark on the trailer tongue and center punch the six hole locations.
- Drill the six holes using a $1\frac{1}{32}$ " drill bit. (**Before drilling make sure the drill will not damage any electrical wires routed inside the frame.**)
- Align the Trailer Tongue Ball with the holes on the trailer tongue as shown in Figure 3. Install screws.

Step 4: Hook-up Sway Control

- Apply a small amount of grease to both sway control balls, place socket of slide bar over the sway control ball and secure with clip.
- Turn the On/Off handle counter-clockwise until the slide bar can easily slide in the main body. Place the socket of the main body onto the trailer tongue ball. Secure it in place with the other clip.
- Turn the On/Off handle all the way clockwise. The threads should bottom out.
- On some installations, damage to the sway control may occur during extremely sharp turning maneuvers. This can be checked by slowly backing vehicle in both directions into a jackknife position while someone is watching. Make sure that the sway control does not hit the bumper or trailer frame and that it does not become fully compressed or come apart. If any of these situations occur when jack-knifed, the sway control must be removed while backing up.

Step 5: Adjustment

- Road and weather conditions, loading and design of the trailer as well as power steering, wheel alignment and the oscillation point of the tow vehicle and trailer all affect towing characteristics.
- Starting with the factory preset tension, road test the sway control. If this is not enough sway control, then adjust the brake tension screw $\frac{1}{4}$ turn clockwise. Road test again and repeat (if necessary) until proper sway control is achieved. Larger or heavier trailers or broad side trailers may require the use of two sway controls.
- After a 1,000 mile break-in period, remove the slide bar and clean it using a wire brush or steel wool. The slide bar should then be cleaned every 10,000 miles.

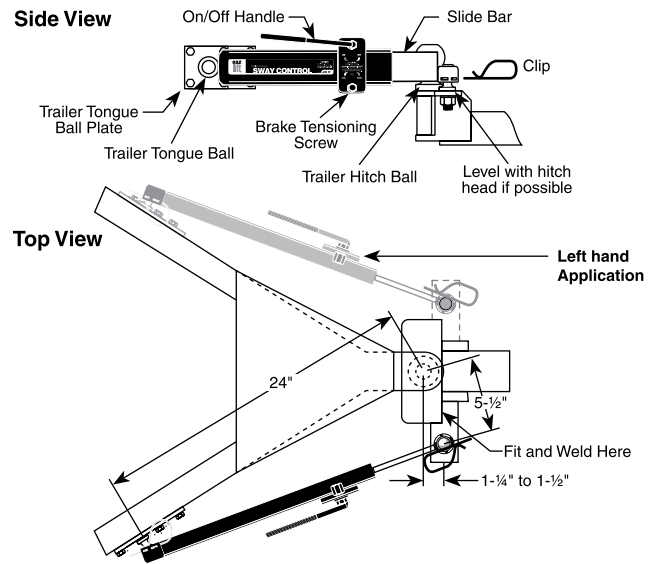


Figure 2

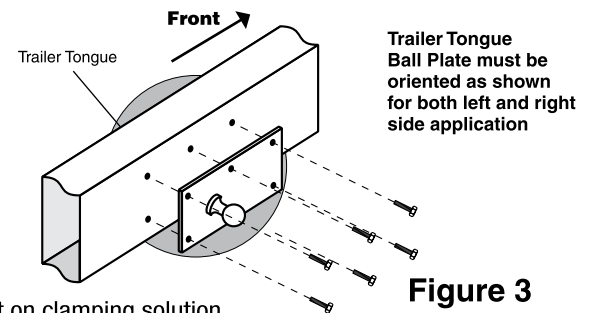


Figure 3

** For a bolt on clamping solution, See Camco Item #48385 (Sold separately).



WARNING



By towing a trailer, you can change the handling characteristics of the tow vehicle. Short wheel base vehicles may induce sway when towing a trailer. Any welding should be done by a qualified welding professional.

LIMITED WARRANTY

This Warranty applies solely to the Sway Control (the "Product") manufactured by Camco Manufacturing, Inc. ("Camco")

1. **Warranty and Warranty Period.** Camco warrants to the original purchaser or consumer (the "Purchaser") of the Product will be free of defects in manufacture and workmanship for a period of 5 years from the date of consumer purchase or Camco will replace the Product free of charge (the "Warranty"). This Warranty is non-transferrable and applies only to the original vehicle on which the Product was installed.
2. **Limitations on the Warranty.** This Warranty does not cover the following: (a) normal wear and tear; (b) service or labor charges which are incurred in removing or replacing any Product; (c) the finish placed on the Product; (d) Product damage or failure which occurs as a result of abuse, neglect or misuse in any manner; and (e) damage which occurs to a Product that is misapplied, overloaded, improperly installed, or altered in any manner by anyone other than Camco.
3. **Obligation of Purchaser.** To obtain the benefits of this Warranty, the Purchaser must complete the following steps: (a) **fill out online Warranty Registration within 10 days of purchase at www.camco.net/warranty**; (b) promptly present the defective Product together with the proof of purchase to any of Camco dealer, distributor, or return it to the factory located at 121 Landmark Drive, Greensboro, NC 27409 and (c) pay all handling, transportation, and shipping charges incurred for the return of the defective Product. Any defective Product returned to Camco shall become the property of Camco.
4. **Obligations of Camco.** Subject to the terms and limitations set forth in this Warranty, Camco's sole obligation will be to replace for the original Purchaser free of charge any Product that is found to be defective.

5. **Legal Rights.** THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE. CAMCO MAKES NO EXPRESSED OR IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU.


CAMCO ASSUMES NO LIABILITY OR RESPONSIBILITY FOR BODILY INJURY THAT MAY BE INFLICTED ON THE PURCHASER, OPERATOR, SPECTATOR OR GENERAL PUBLIC WHO IS IN THE GENERAL AREA WHILE THIS EQUIPMENT IS IN USE, FOR THE LOSS OF THE USE OF ANY VEHICLE, LOSS OF TIME, RENTAL OF VEHICLES, LOSS OR DAMAGE TO PERSONAL PROPERTY, EXPENSES SUCH AS GASOLINE, TELEPHONE, LODGING, OR TOWING, OR ANY OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGES INCURRED AS A RESULT OF THE USE OR OWNERSHIP OF ANY PRODUCT. SOME STATES DO NOT ALLOW THE EXCLUSION OF A LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE EXCLUSION OR LIMITATION SET FORTH MAY NOT APPLY TO YOU. REPLACEMENT OF THE PRODUCT IN THE MANNER PROVIDED ABOVE SHALL CONSTITUTE FULFILLMENT OF ALL LIABILITIES OF CAMCO TO THE PURCHASER WHETHER BASED ON CONTRACT OR OTHERWISE.

CAMCO RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR TO MAKE ADDITIONS OR IMPROVEMENTS WITHOUT BEING OBLIGATED TO INSTALL THE SAME UPON PRODUCTS COVERED BY THIS WARRANTY. THIS WARRANTY IS VALID ONLY IN THE UNITED STATES AND CANADA.

Other Camco Products

Wheel Chocks


- Chocks keep your trailer in place so you can re-hitch or level with confidence
- Solidly constructed of durable hard plastic with UV inhibitors



44412 - Chock
44472 - Chock (with pull rope)
44492 - **Super** Chock

Leveling Jack Blocks


- Customize your levels
- Wide pad construction for greater stability
- Heavy duty blocks are safe and easy to use
- Each set comes in a convenient storage bag



44501 - 4 pack Blocks
44505 - 10 pack Blocks
44401 - 2 pack Chock

Leveling Scissor Jacks


- 5 step easy installation
- Allows for either weld-on or bolt-on applications
- Fits most Motorhomes or Trailers
- Multiple sizes for different applications



48800 - 20" (2 pack-5000 lb)
48810 - 24" (1 pack-5000 lb)
48820 - 24" (2 pack-5000 lb)
48830 - 24" (2 pack-7500 lb)
48840 - 30" (2 pack-5000 lb)

Speed Crank Handle


- 3/4" socket-end speed wrench design
- Easy grip handle which turns while cranking
- Zinc plated

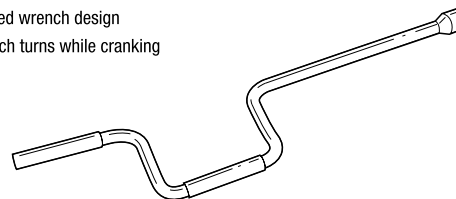

57874

Stabilizing Base Pads


- Wide pad construction for greater stability
- Installation hardware included
- Four pads per box
- Works with most Cross-frame or "T" type stabilizing jacks
- Anti-rattle rubber grommet provided



57883 (Qty: 4)

Sway Control Adapter

- Fits most competitor's brands of ball mounts with 1" ball shank hole
- For 2 inch ball mounts
- Used on left or right side • Bolts together




48386

Does not include balls or utility ball mount.

Stabilizing Trailer Jacks


- Extends from 11" to 17" (28 to 43 cm)
- Permanent handle
- Heavy duty noncorrosive cast aluminum base
- Max. capacity: 6000 lbs per jack
- Set of two or four per box



44561 (Qty: 2)
44560 (Qty: 4)

Telescopic Stabilizing Jacks

- Zinc-Plated Inner Tube and Screw Assembly
- Adjustable from 16" to 30"
- Quick and Easy Pull Pin
- Steel Construction - Painted Black
- 6000 lb. Load Capacity



48860 (Qty: 2)

CAMCO MFG., INC.

121 Landmark Drive / Greensboro, NC 27409 / USA

1-800-334-2004

www.camco.net

