



Garage floor sealing kit Installation guide

PR585 KIT-D Double Door

PR585 KIT-S Single Door



6m PR585

3.2m PR585

FLEX 40FC Glue X2

FLEX 40FC Glue X1



Silicone cleaning wipes

Silicone cleaning wipes

Silicone Scraper

Silicone Scraper



Masking tape


Masking tape




Lay down the rubber floor seal and line it up with your garage door bottom seal to its in position. This works best if your door seal fits into the corner of the foorseal. In case of an edge right at the door you can turn the door seal around and let the door seal sit on the step

Mark the position with chalk or pencil to better see where to clean. While you are cleaning leave the door seal on a hot surface in the sun, this will remove any rolls and kinks it might have picked up in storage

Clean thoroughly with soap and water, some garages might be greasy and need extra care to clean like a degreaser or acetone. Make sure the door isn't powdery or oily before proceeding. In case of an epoxy or painted floor, give the floor a scrub with some sand paper before proceeding to the next step. It is also important to not that if excessive oil has penetrated the surface of your floor extra precautions should be taken to clean or seal it.

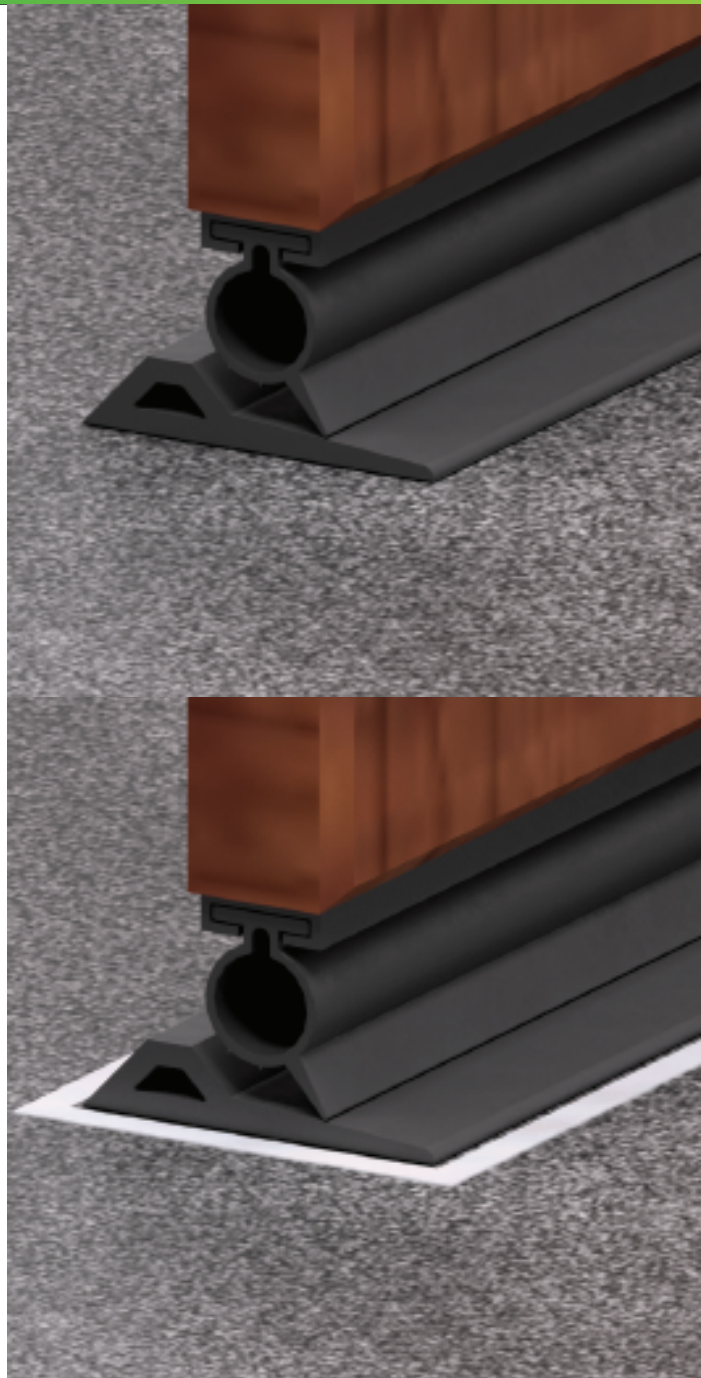

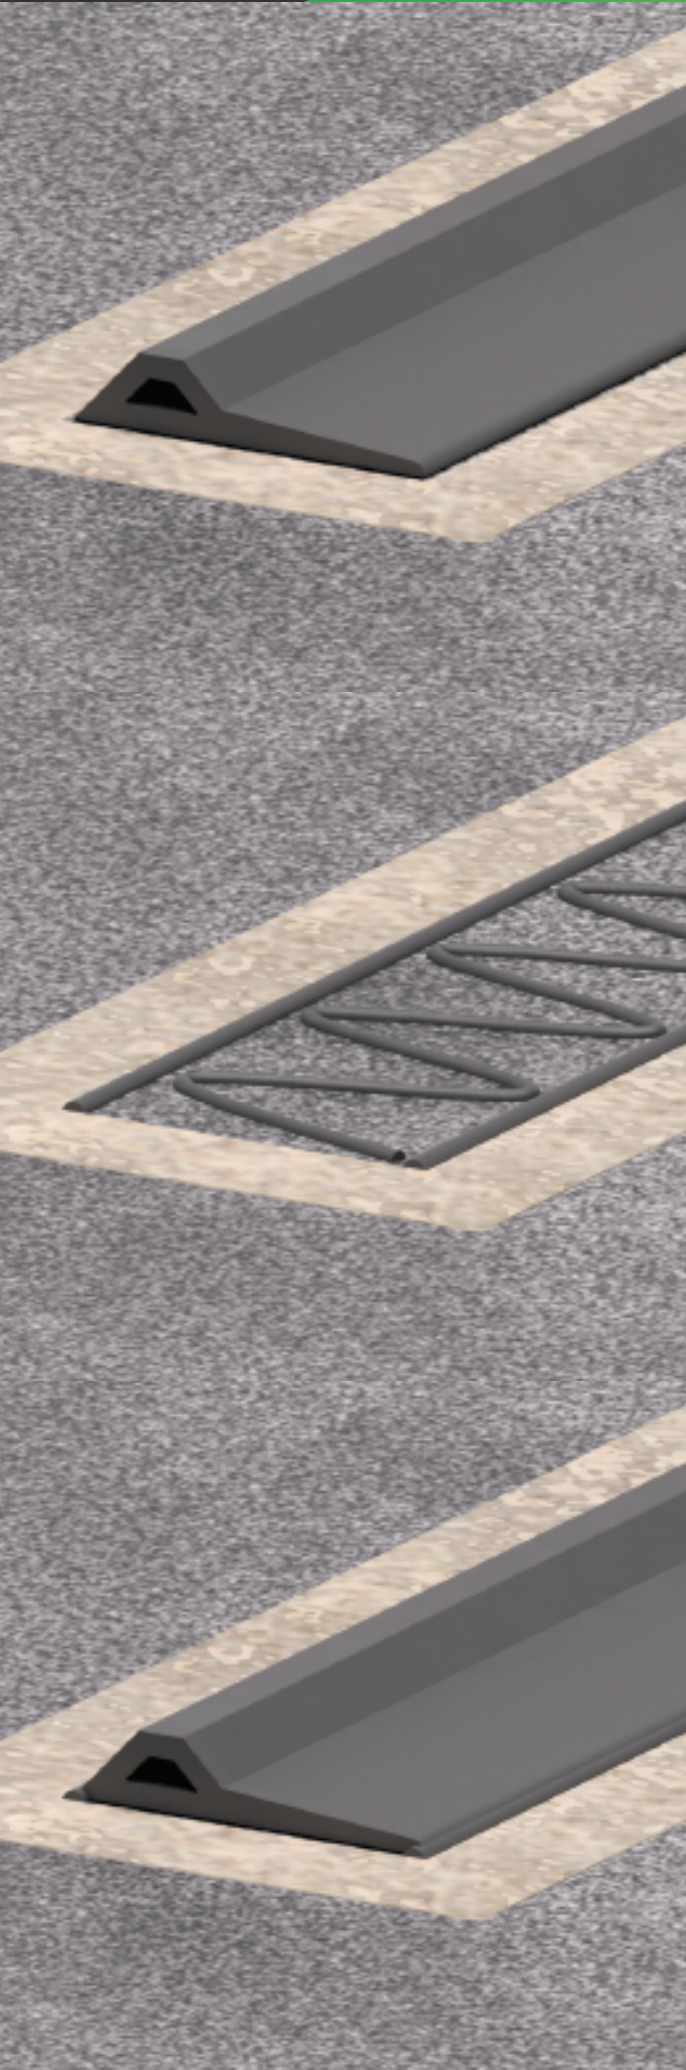

Like before, align your seal again, lowering the door onto it and making sure it sits well on the seal. Take the masking tape and stick a border about 5 mm from the seal all around. This will help guide where you stick it



Apply the silicone to the door in a zigzag pattern and a seam at both edges of the profile. Use a lot of glue for better adhesion, especially around the borders. Put the border glue inside of the masking tape, when you press the seal down it will squish out, this is important for a good seal.



Press the seal down on the glue and press on it to spread the glue underneath. Take some time to do this. The flatter the glue the better the adhesion


Lower the garage door onto the seal to help seat it in the right position. This is your last chance to get the position right. Use the silicone scraper provided in the kit to scrape the silicone. the round corner will work best.



Use the silicone cleaning wipes to clean off any smudges from the seal and your hands



Peel off the masking tape while the silicone is still fresh, this will leave you with a straight and neat seal. Lower the garage door onto the seal and leave it overnight to cure.

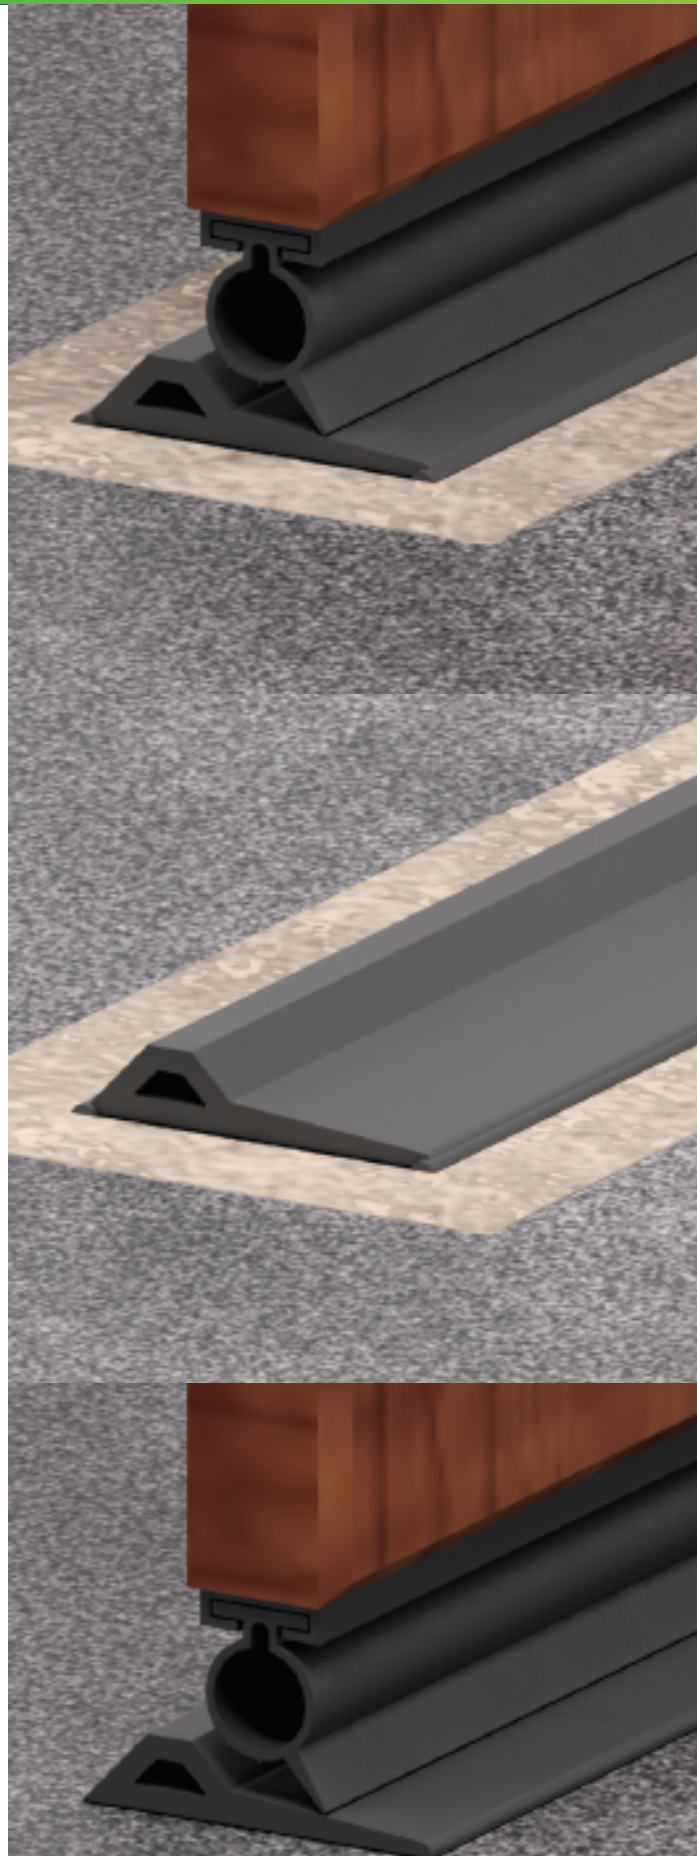

Dust seal kits