


Thank you for buying 'Wall bar towel rail'



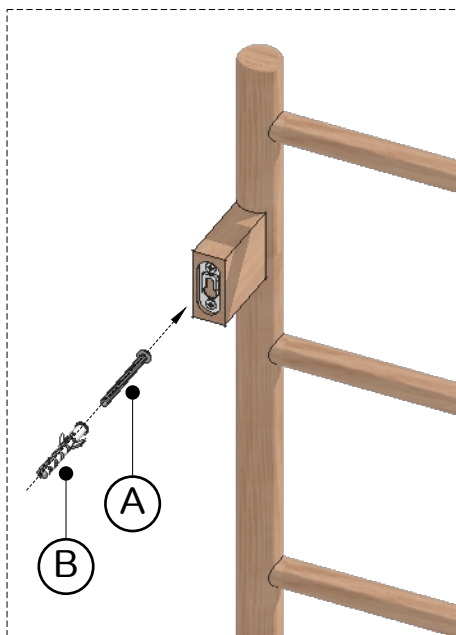

Installation instructions.

Please read the instructions and warnings carefully before use to ensure safe and satisfactory operation of this product.

The Wall bar towel rail is supplied with screws and wall plugs suitable for a stone or brick wall. For other wall types (eg. hollow plasterboard) alternative fixings will be required. If in doubt, consult a qualified person.




Fixings (as marked):

- (A) Wall screws x4  
- (B) Wall plugs x4  

Fitting Instructions:

You will need a power drill, a masonry drill bit, a medium cross-head screwdriver, a spirit level and pencil to install this product. Ensure the wall surface is of suitable strength and construction before hanging the Wall bar towel rail. Position Wall bar towel rail against wall using spirit level to check alignment.

Mark using a pencil the positions for the four wall plug holes. These should use the keyhole slots at the back of the wood frame. Drill holes to depth of 50mm and push in wall plugs so they are flush. Fix wall screws securely leaving the screw heads protruding 4mm from the wall. Hang towel rail unit from wall screws. Adjust screws depth to get a tight fit between the Wall bar towel rail frame and the wall.

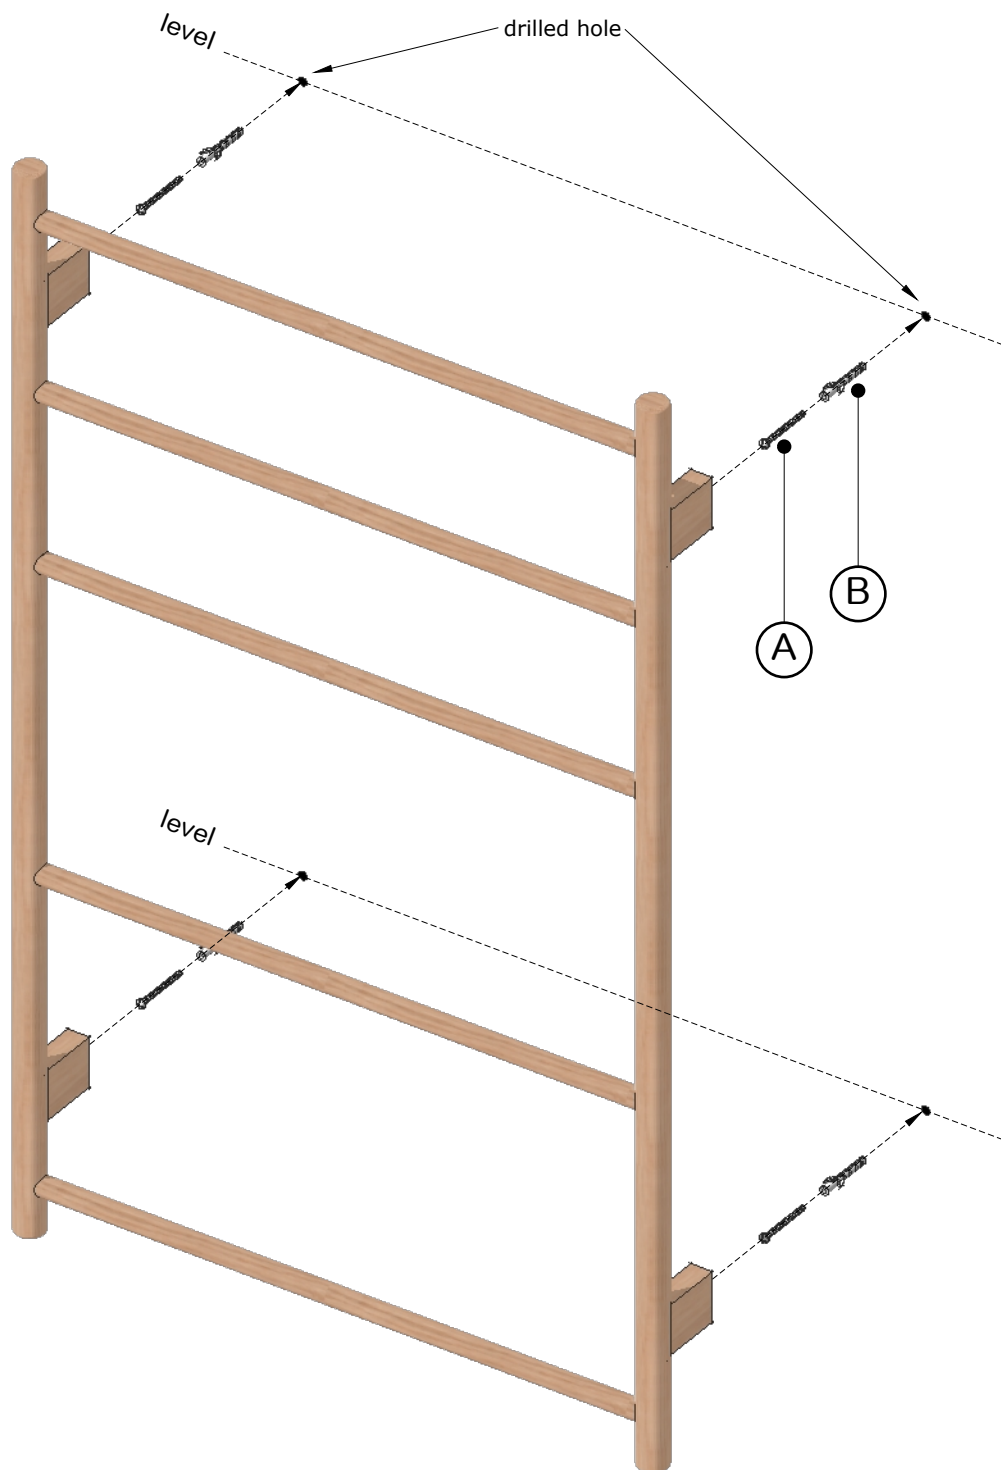

Warnings:

Fit in accordance with manufacturers instructions. Wear suitable eye protection when drilling. When using power tools near water the use of a residual current device is advised for added protection against electric shock.

Maximum load for each individual rail 1.5kg

Beware of hidden pipes or power cables. Take care when drilling on glazed tile surfaces in case drill slips.

Cleaning:

When cleaning use a damp cloth or chamois leather with washing up liquid or soft soap if necessary.

Supplied by Wireworks 43a Mercers Road London N19 4PP.
www.wireworks.co.uk