


# vegō<sup>®</sup>

## Retractable Hose Reel Set

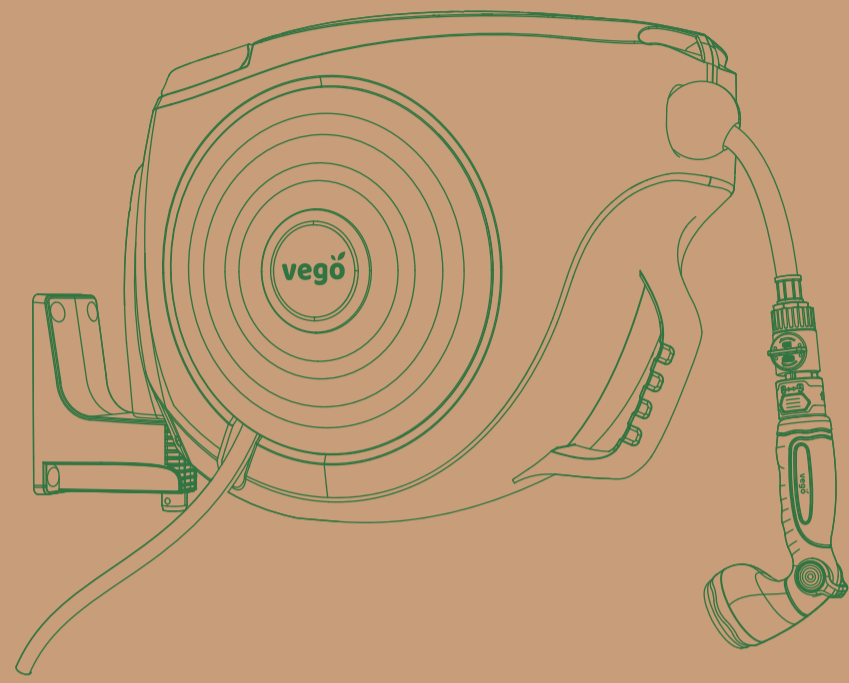


Installation Videos  
www.vegogarden.com/assembly

### Cautions

- The Retractable Hose Reel should only be installed outdoors.
- Use with cold water only.
- Do not use under the influence of medication, alcohol or drugs.
- Do not leave unattended around children or people with reduced capabilities.
- Exercise caution when installing. Bend your knees and not your back to avoid injuries.
- Avoid leaning on the hose reel to prevent potentially damaging the product.
- Mount your hose reel in a location away from direct sunlight to prevent overheating.
- When not in use, turn off the faucet and depressurize the hose.

### Parts List

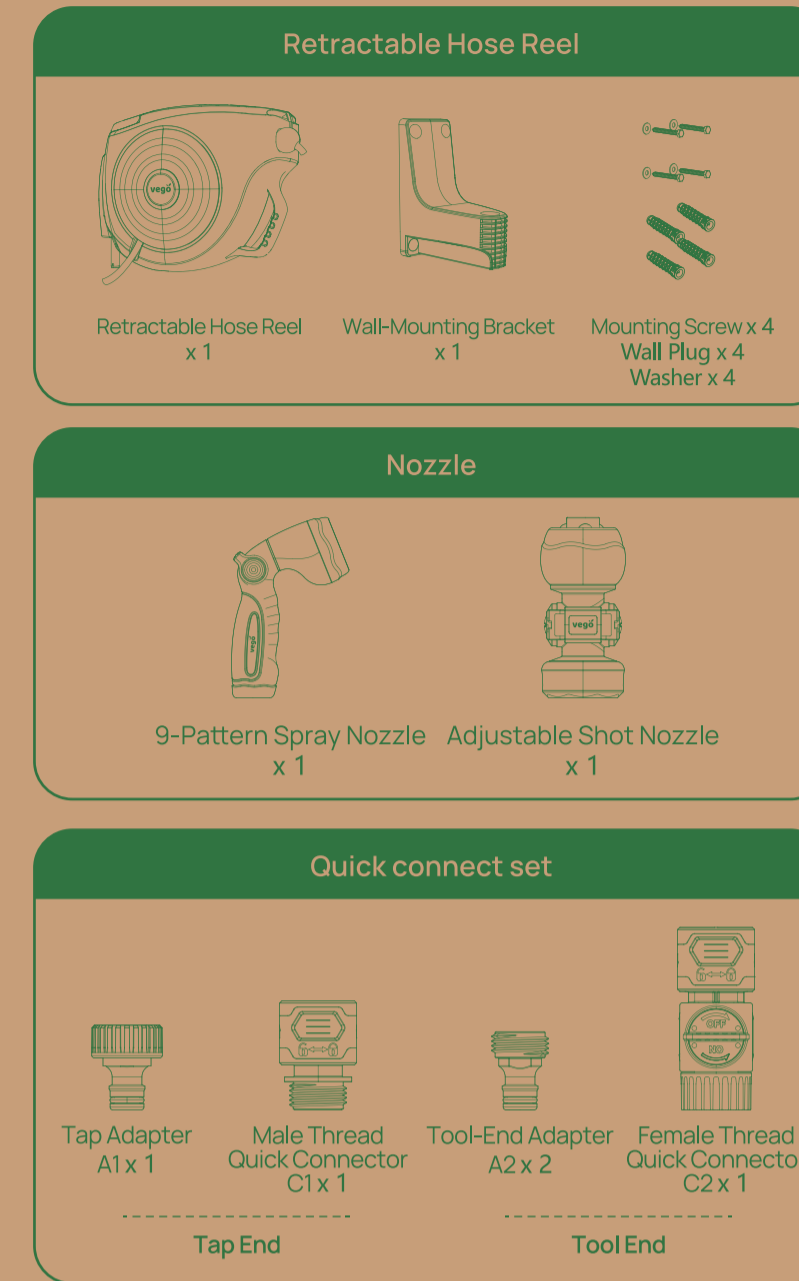

### Installation

#### Location

- Cement, brick or flat-wood wall
- Install at approximately waist height and up to 5 feet (1.5 meters) away from outdoor faucet


#### Tools Required

- Electric drill
- Hammer
- Masonry drill 1/2 inch or 11/64 inch bit
- Socket set, 3/8 inch (10mm)
- Eye and glove protection for safety




Installation Videos


### Step 1

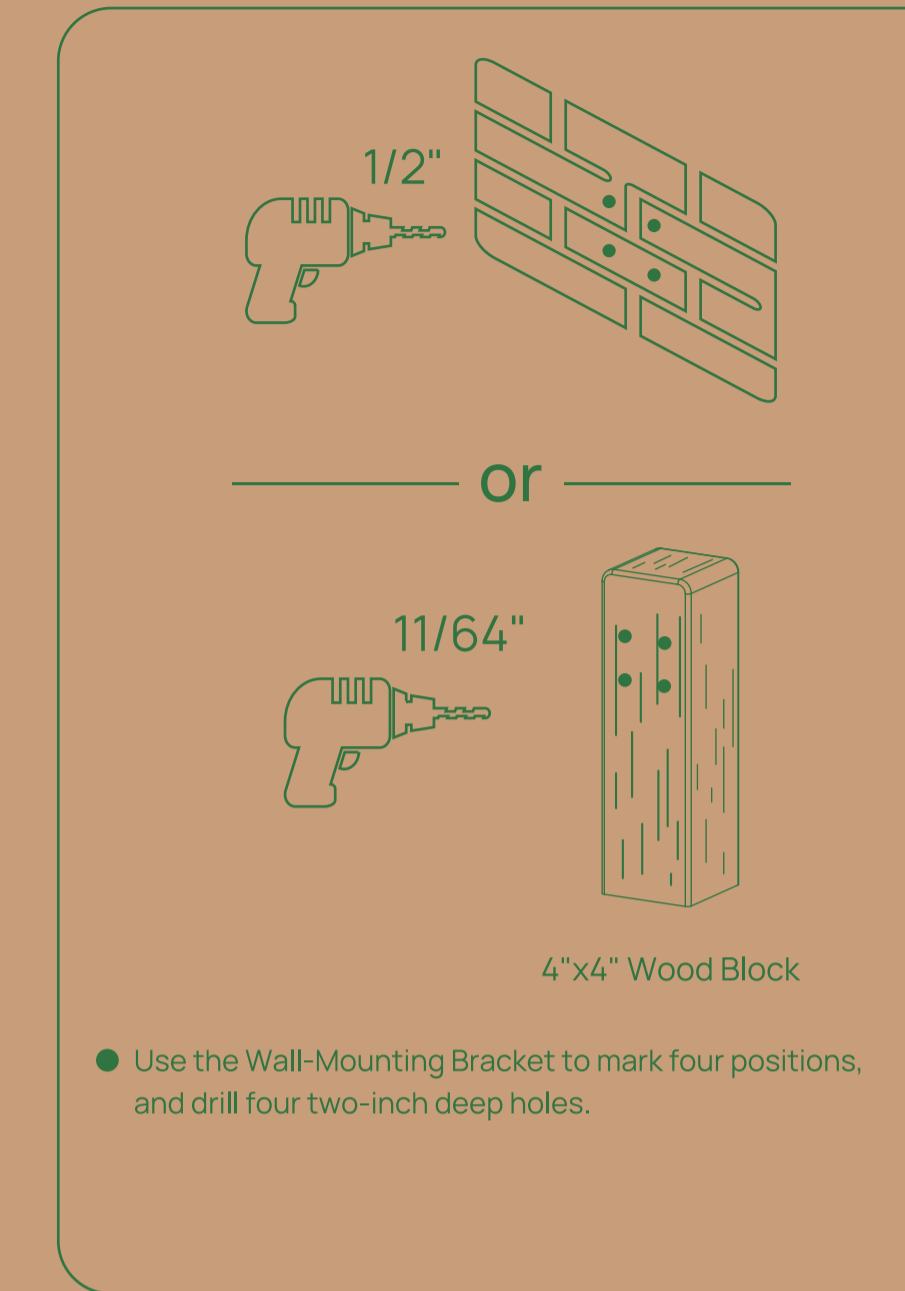


### Step 2

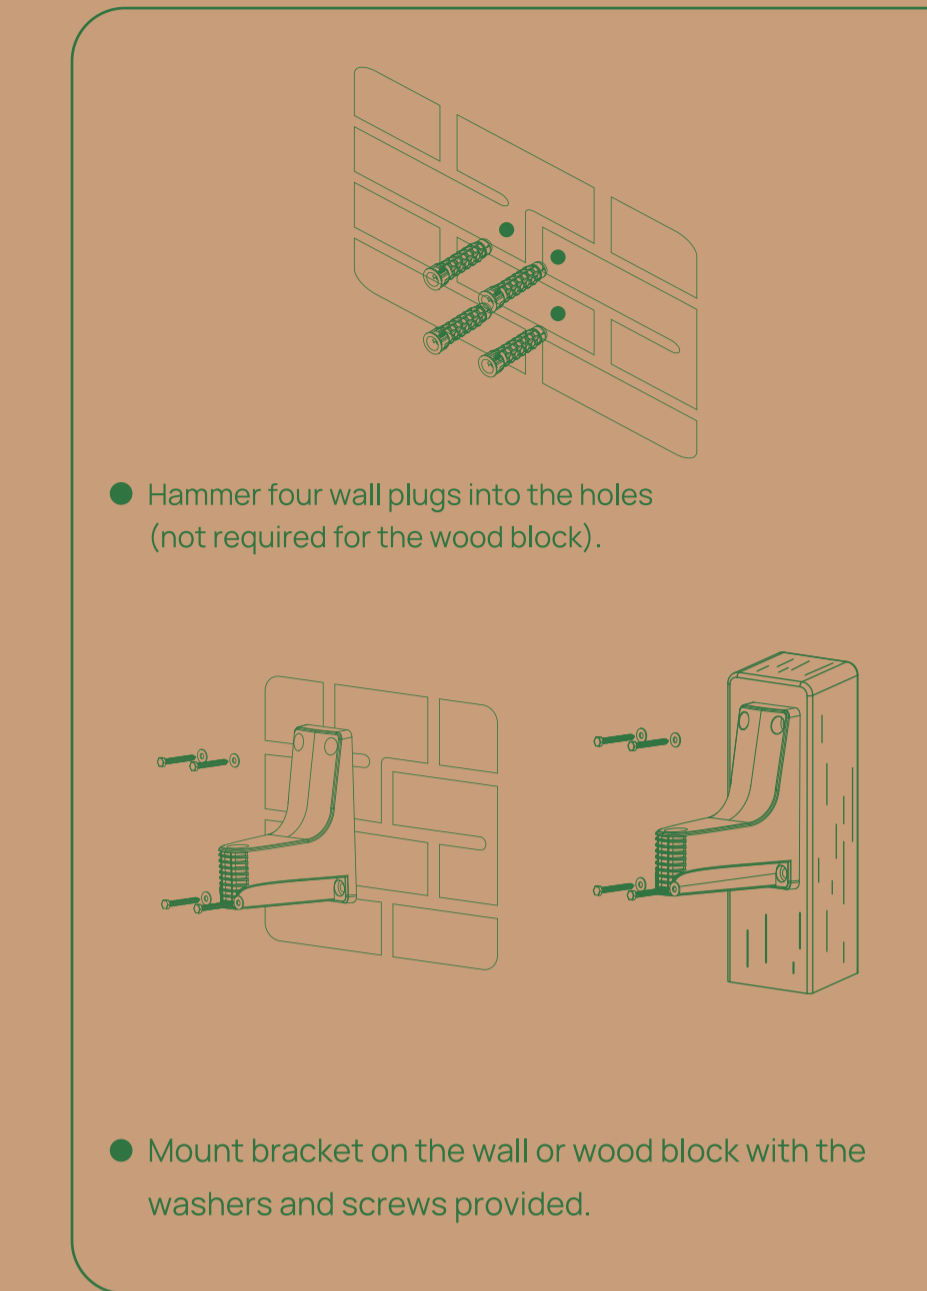

### Step 3

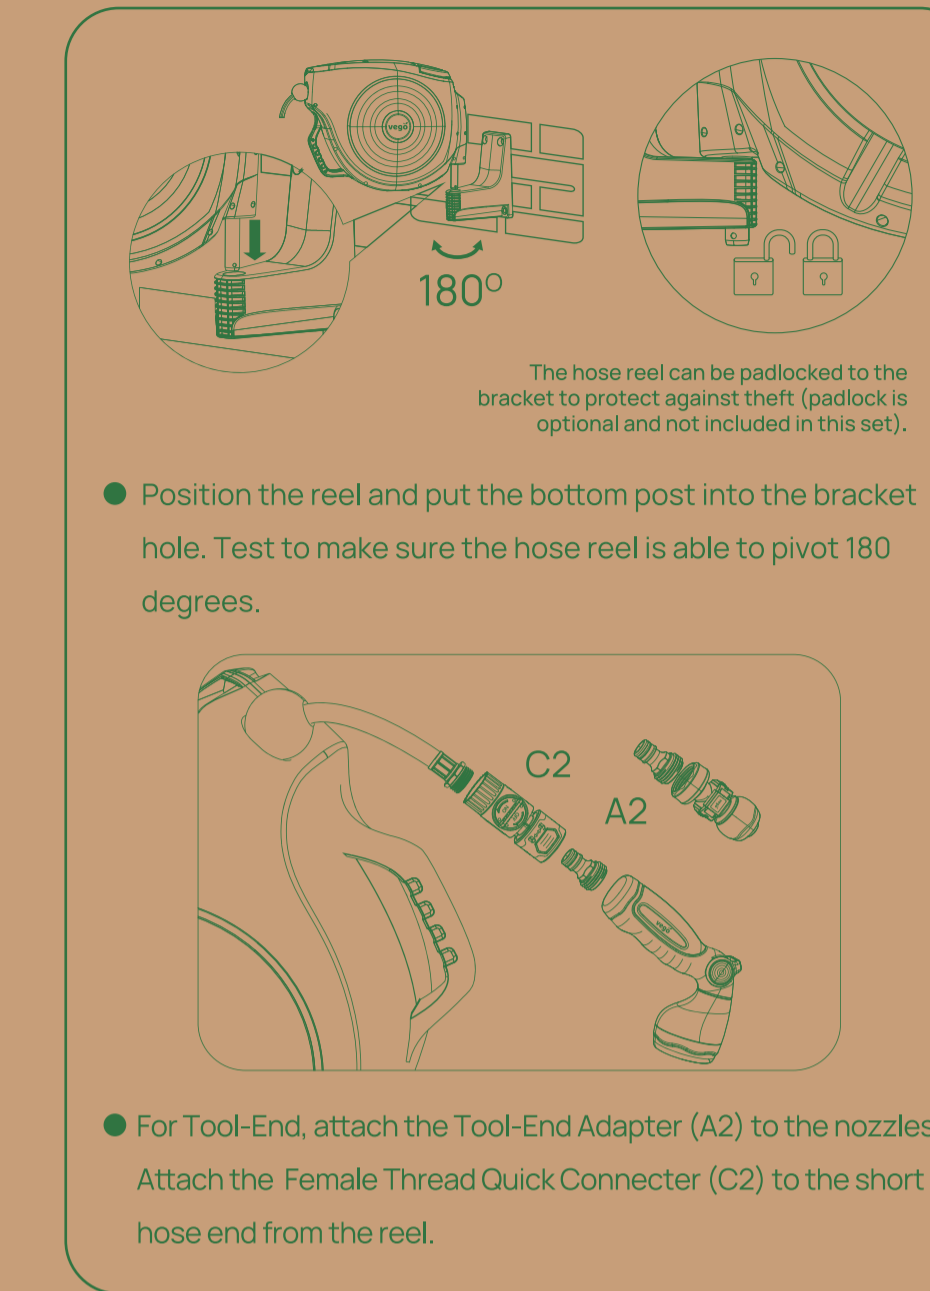



### Step 4

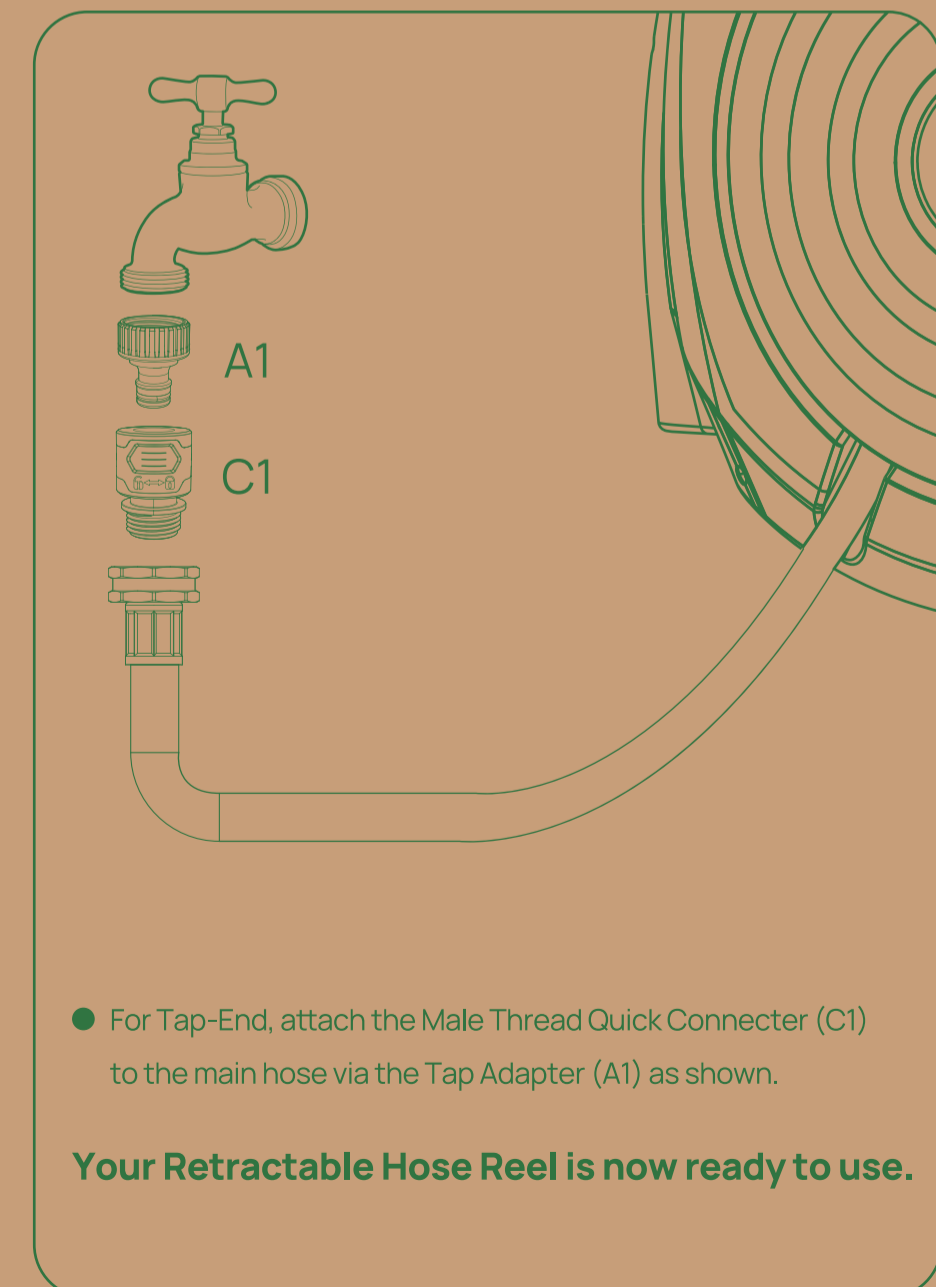


- For Tap-End, attach the Male Thread Quick Connector (C1) to the main hose via the Tap Adapter (A1) as shown.

Your Retractable Hose Reel is now ready to use.


### How To Use

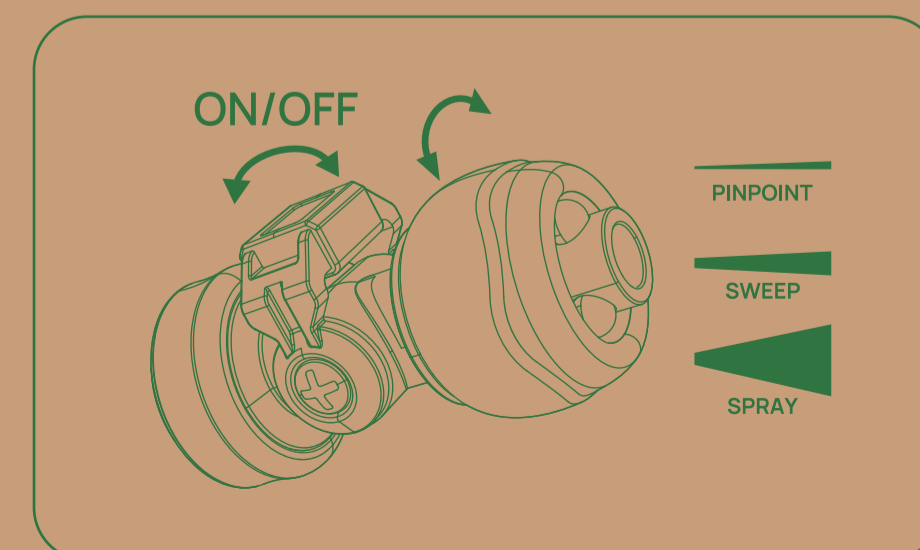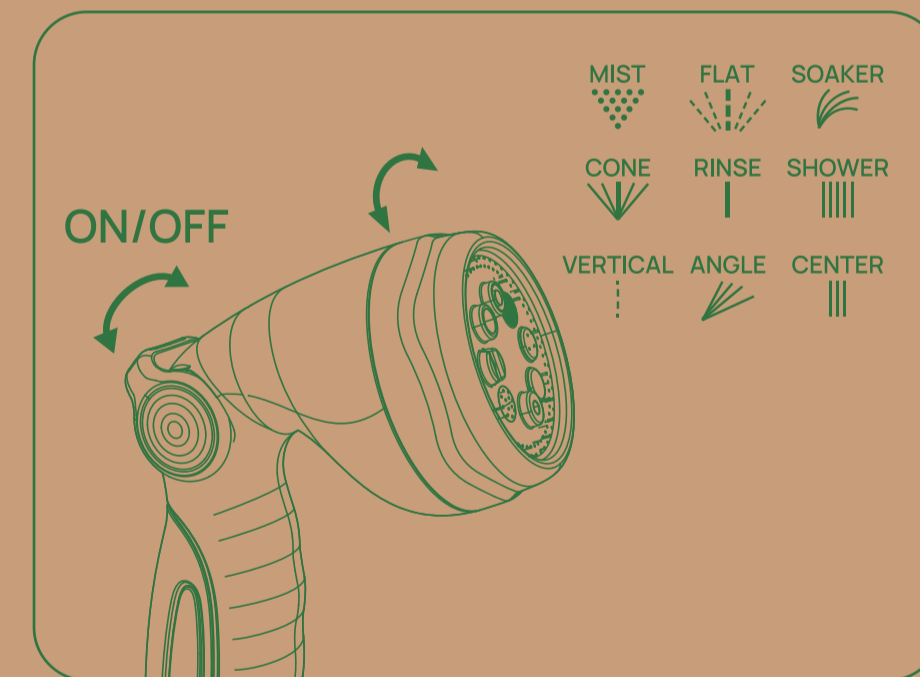

### How To Use

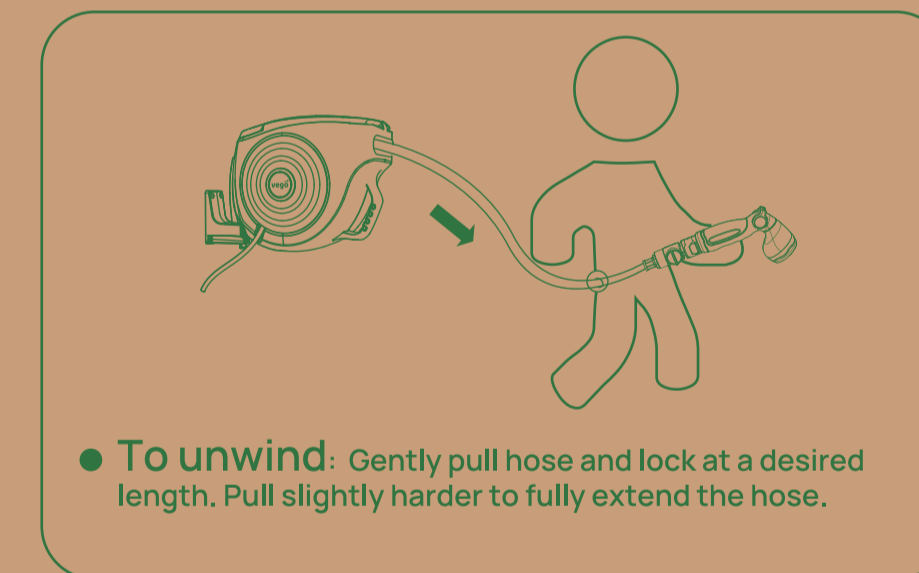

- **To unwind:** Gently pull hose and lock at a desired length. Pull slightly harder to fully extend the hose.

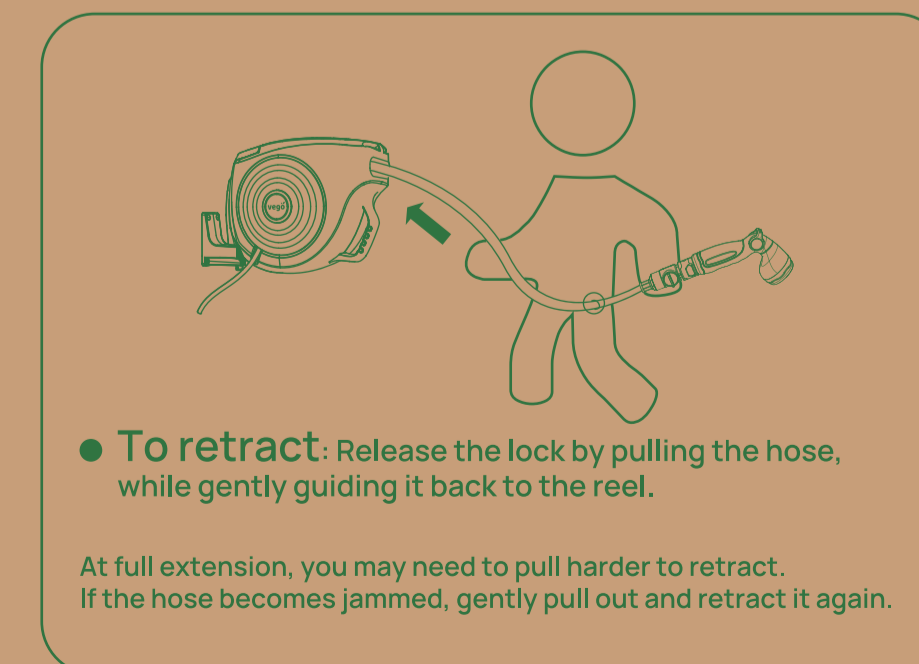

- **To retract:** Release the lock by pulling the hose, while gently guiding it back to the reel.


At full extension, you may need to pull harder to retract. If the hose becomes jammed, gently pull out and retract it again.

### ⚠ WARNING

Do not retract the hose at high speed, as this may cause injury and damage the product.

### Storage

Drain the hose completely and turn off the faucet during freezing temperatures.




Installation Videos

### Specifications

MODEL NO.	HOSE LENGTH	HOSE MATERIAL	WEIGHT	WORKING PRESSURE (PSI)	HOSE INNER DIAMETER
VWRHRS121 30BL	130ft, 6.5ft leader hose	PVC	17.09KG	40-60 psi	7/16 inch
VWRHRS121 30WT	130ft, 6.5ft leader hose	PVC	17.09KG	40-60 psi	7/16 inch
VWRHRS121 30GR	130ft, 6.5ft leader hose	PVC	17.09KG	40-60 psi	7/16 inch
VWRHRS581 00BL	100ft, 6.5ft leader hose	PVC	15.39KG	40-60 psi	9/16 inch
VWRHRS581 00WT	100ft, 6.5ft leader hose	PVC	15.39KG	40-60 psi	9/16 inch
VWRHRS581 00GR	100ft, 6.5ft leader hose	PVC	15.39KG	40-60 psi	9/16 inch

● MAX PRESSURE FOR HOSE REEL: 150psi

### Troubleshooting

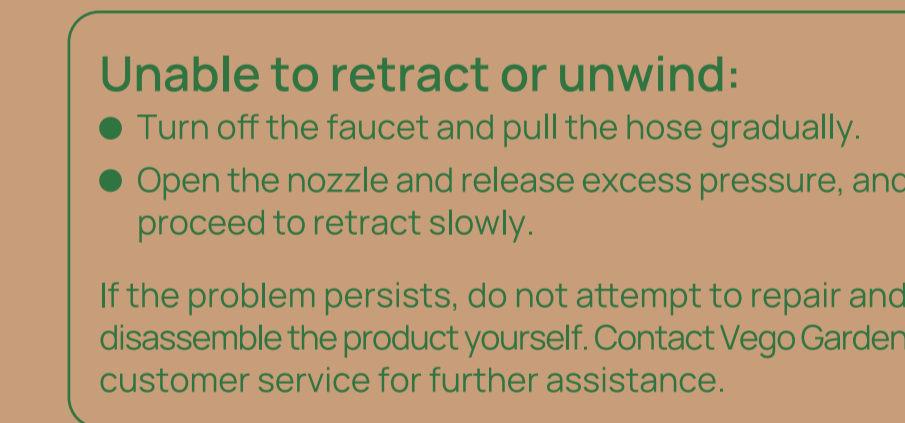

### Warranty and Service

