


**NOTES:**

- 1) CENTER OF HOLE TO BE 5'-2 1/4" FROM END LINE OF FIELD.
- 2) POST TO BE INSTALLED 5'-0" FROM END LINE OF THE FIELD.
- 3) THREADED ROD INSTALLED IN CONCRETE BASE MUST BE SQUARE WITH FIELD STRIPING.
- 4) CROSSBAR RETAINS LEVEL BY SET SCREWS AND LOCKING BOLT.
- 5) GOOSENECK POST FURNISHED GALVANIZED. PAINTING TO BE DONE BY OTHERS AFTER INSTALLATION.
- 6) CROSSBARS AND UPRIGHTS FURNISHED IN EITHER WHITE OR YELLOW FINISH. CUSTOMER TO SPECIFY COLOR AT TIME OF ORDER.



REVISION		
REV.	DATE	BY
A	05/28/08	RWP

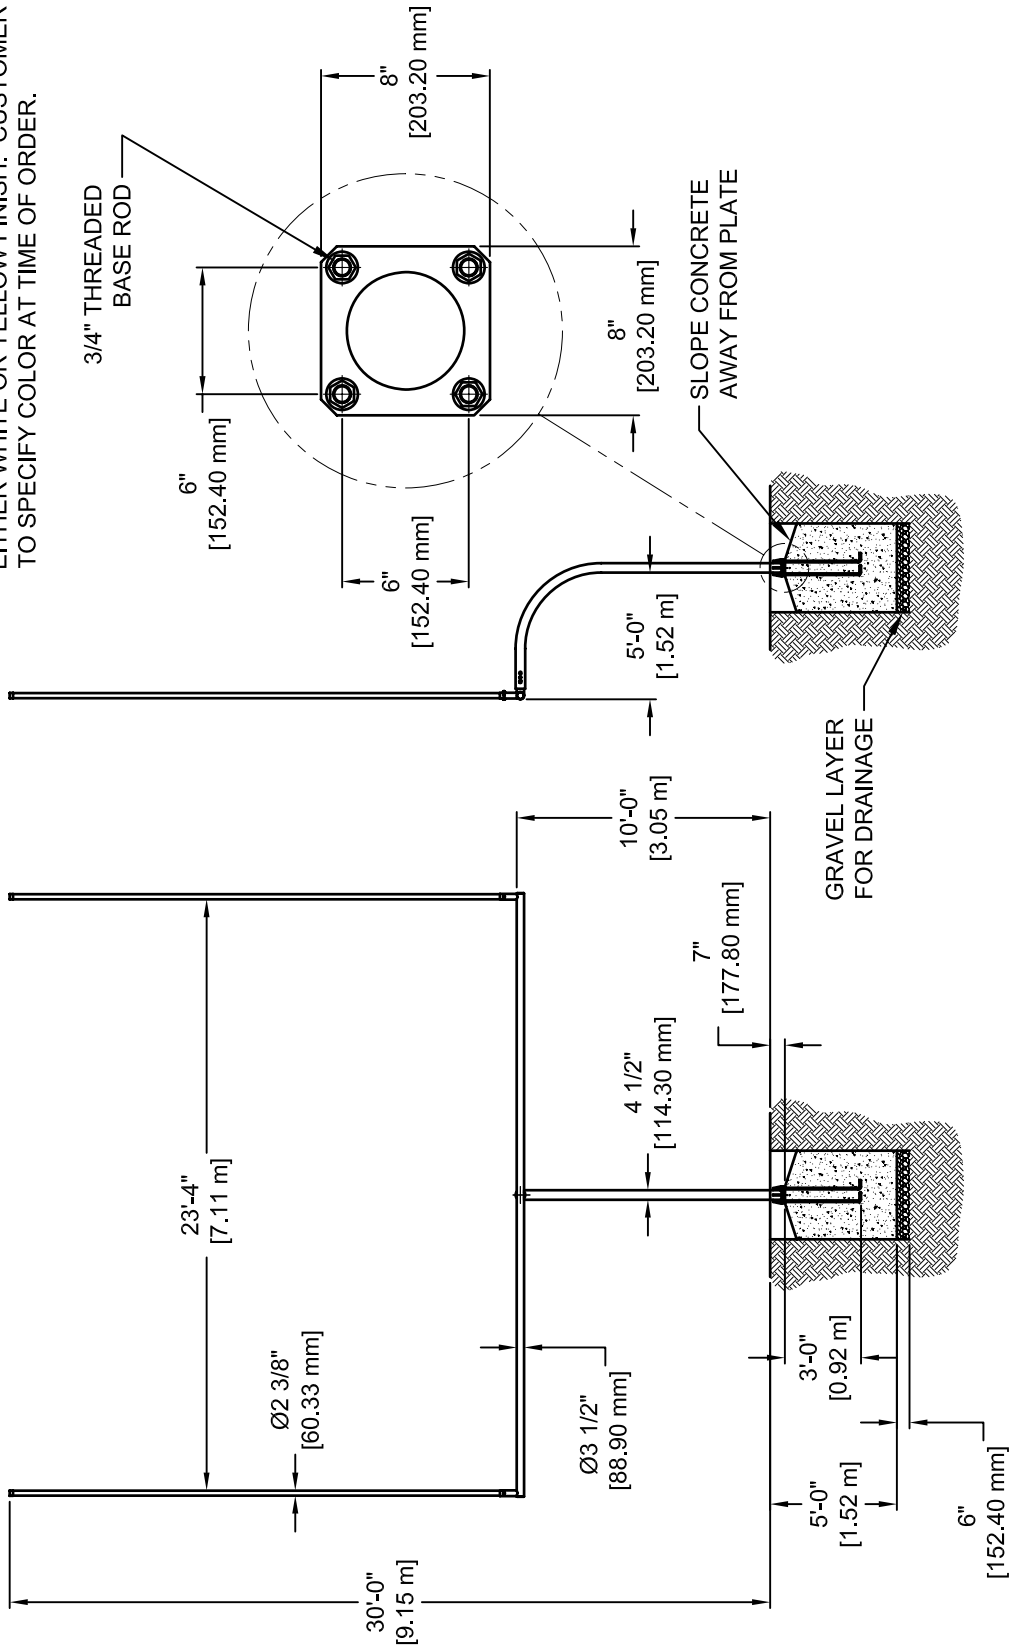


**Gared Holdings, LLC**  
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

**HIGH SCHOOL F'BALL GOAL POST PLATE MOUNTING**

DRAWN	CONNERLEY	DATE	09/16/04	MATERIAL	N/A
APPROVED	JJC	DATE	09/16/04	FINISH	N/A
FILE LOC.				Q:\Final Release\Specifications	DWG. NO.
				FGP401P	

SIZE	SCALE	SHT. NO.	PART NO.	REV
A	NONE	1 OF 1	FGP401P	A



### MODEL FGP401P

## **HIGH SCHOOL FOOTBALL GOAL POST 5' OFFSET Permanent Adjustable Plate Mounting**

This unit uses a gooseneck design to meet all NFSHSA specs. Goal measures 30' high with a 5' offset. Crossbar measures 23'-4" between uprights. Gooseneck post is 4 1/2" O.D. powder coated over galvanized steel. Crossbar is 3 1/2" O.D powder coated over galvanized steel. Uprights are 2 3/8" O.D powder coated over galvanized steel. Uprights measure 20' above crossbar. Wind flags are included.

Unit shall be designed for permanent installation. Upright mounting anchors to be installed in a concrete footing approximately 42" in diameter and 60" deep. Post shall mount with the use of four 3/4" diameter threaded anchors through the lower post plate.

This model goal post is not compatible with ground sleeves.

**Concrete for installation not included.**

**Colors are selected by specifying one of the part numbers listed below on the order.**

FGP401PW	White gooseneck, crossbar and upright
FGP401PY	Yellow gooseneck, crossbar and upright

### **Optional Equipment**

GSPPAD4	Protective post pad for posts up to 6" O.D.
---------	---------------------------------------------

Protective pads are 6' high for installation around post areas where body contact may occur. Constructed of high density urethane foam covered with 18 oz. mildew resistant and UV resistant coated vinyl. Available in the following colors: red, white, green, yellow, royal blue, black, purple, orange, and gray.

Subject to design change and current manufacturing practices.  
Revised April 4, 2008 ©2008 Gared Holdings, LLC