
BASIN FAUCET INSTALLATION MANUAL




INSTALLATION CONDITION



- 1.Refer to the 《Standard Part List》 when unpacking, check all parts available.
- 2.Do not disassemble mixer body by yourself.
- Connect inlet hoses to supply valves.
- 4. Make sure inlet pipes and supply valves have been installed and cleaned, also ensure no impurities in pipeline.
- 5. After installation, check all joints for leakages.
- 6. Suggest don't fit the faucet in the severely corrosive environments.

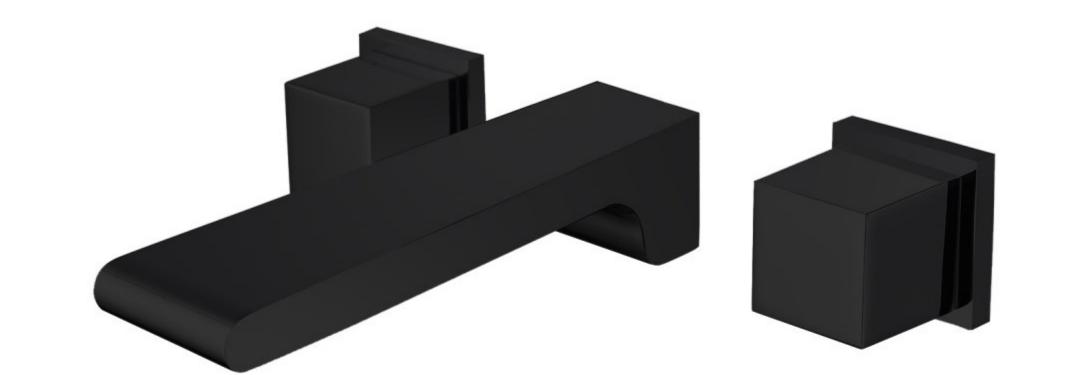


WALL MOUNT FAUCET STANDARD PART LIST

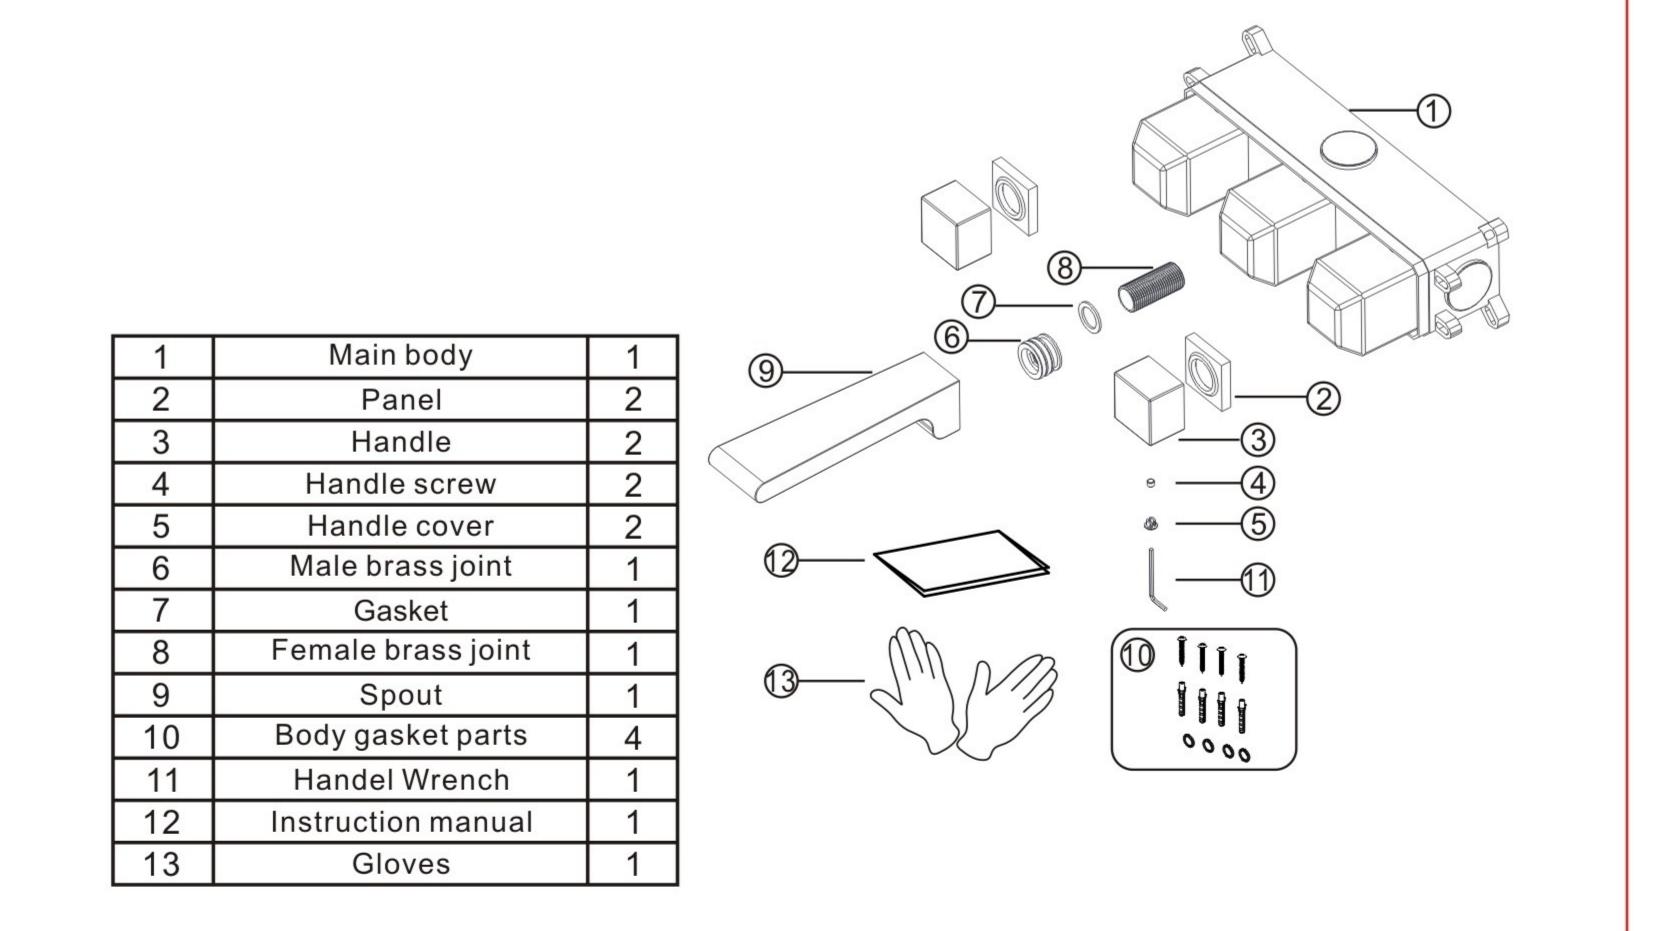


INSTALLATION SIZE DIMENSIONS

Unit:mm/inch

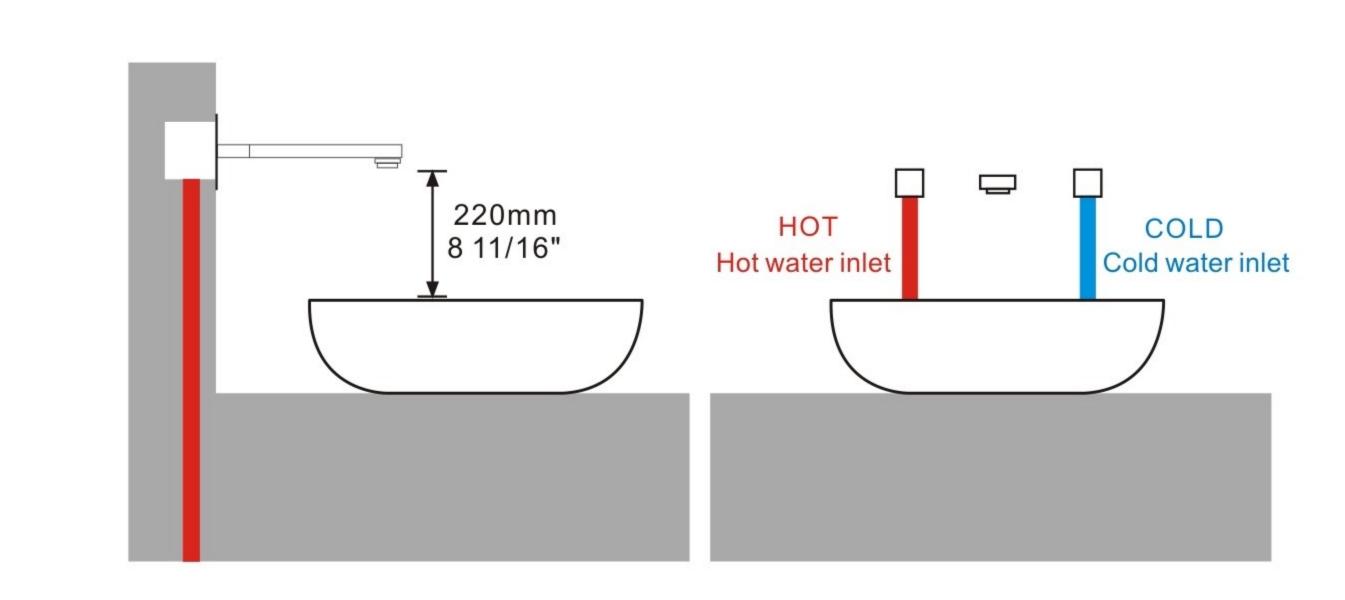


INSTALLATION DEPTH OF MAIN BODY

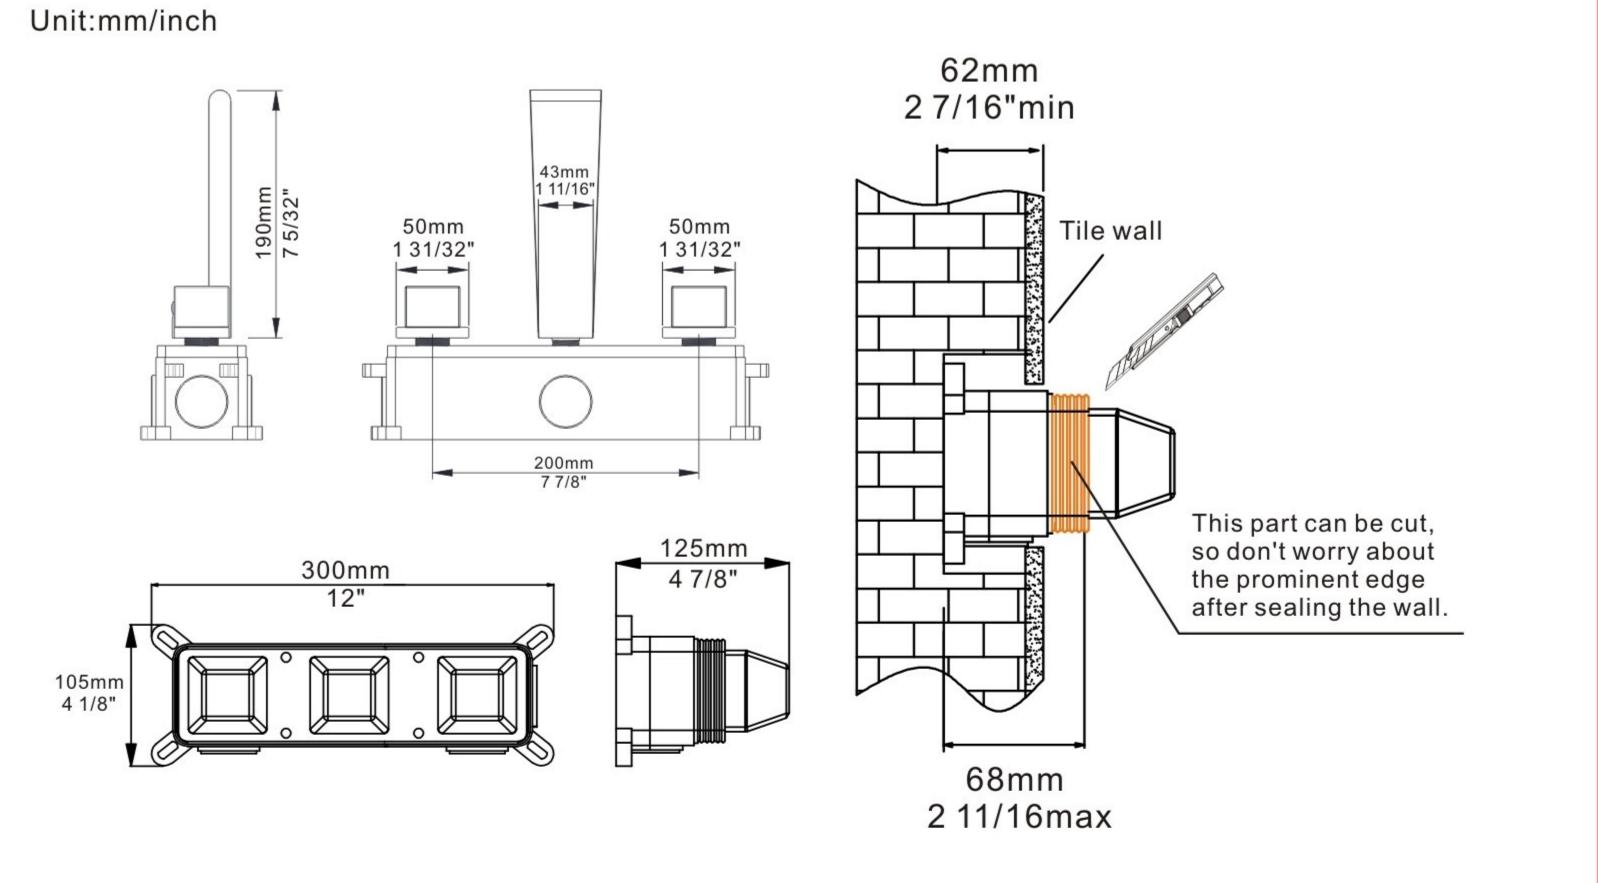


- 1:Including the thickness of ceramic tile is less than or equal to the thickness of valve 2 7/16"(62mm), so the thickness of tile must be calculated before installation
- 2:Installation Main body depth not less than 2 7/16"(62mm)min and not more than 2 11/16" (68mm) Max, Otherwise, the panel cannot be installed.


MAIN BODY CONNECTING PIPE SCHEMATIC DIAGRAM

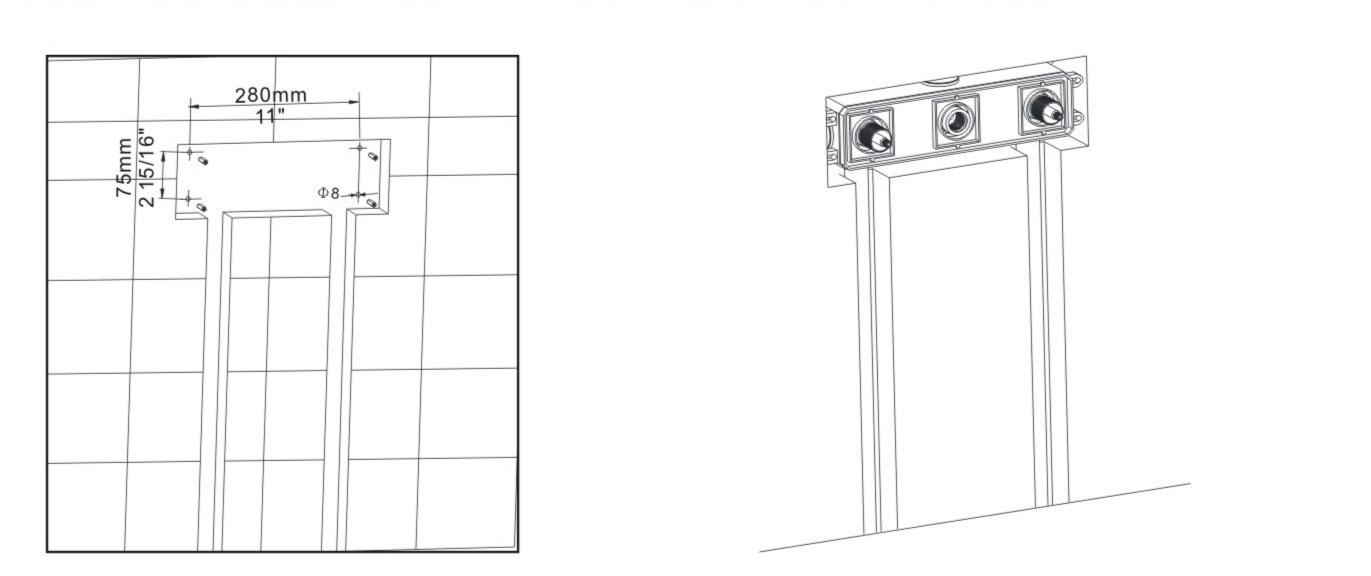

- 1:The pre-buried groove is made on the blank wall(including the thickness of ceramic tile); φ8mm holes are punched with impact cobalt on the wall, and the plastic is inserted into
- 2:As shown in the figure, the inlet pipes are pre-buried, pay attention to the correct direction of installing the pre-buried box, Make sure the level is parallel correctly, otherwise the panel
- 3:Turn on the water source to test whether the left and right inlet pipes are tightly connected without leakage. After the test, adjust the flow switch to be on to test whether the mixed outlet pipe. The connection is tight and there is no leakage.

MAIN BODY INSTALLATION

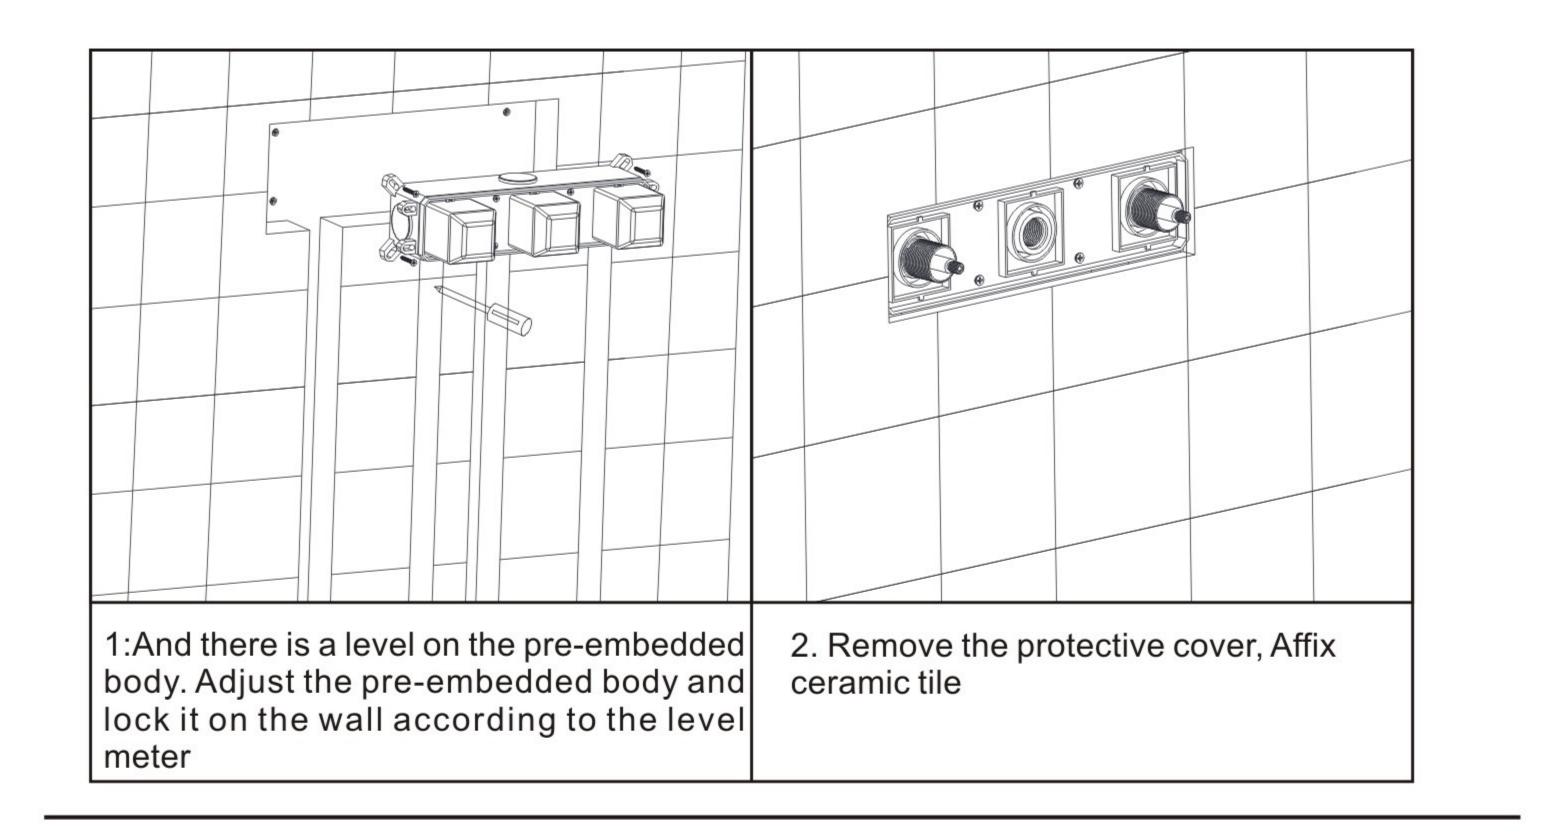


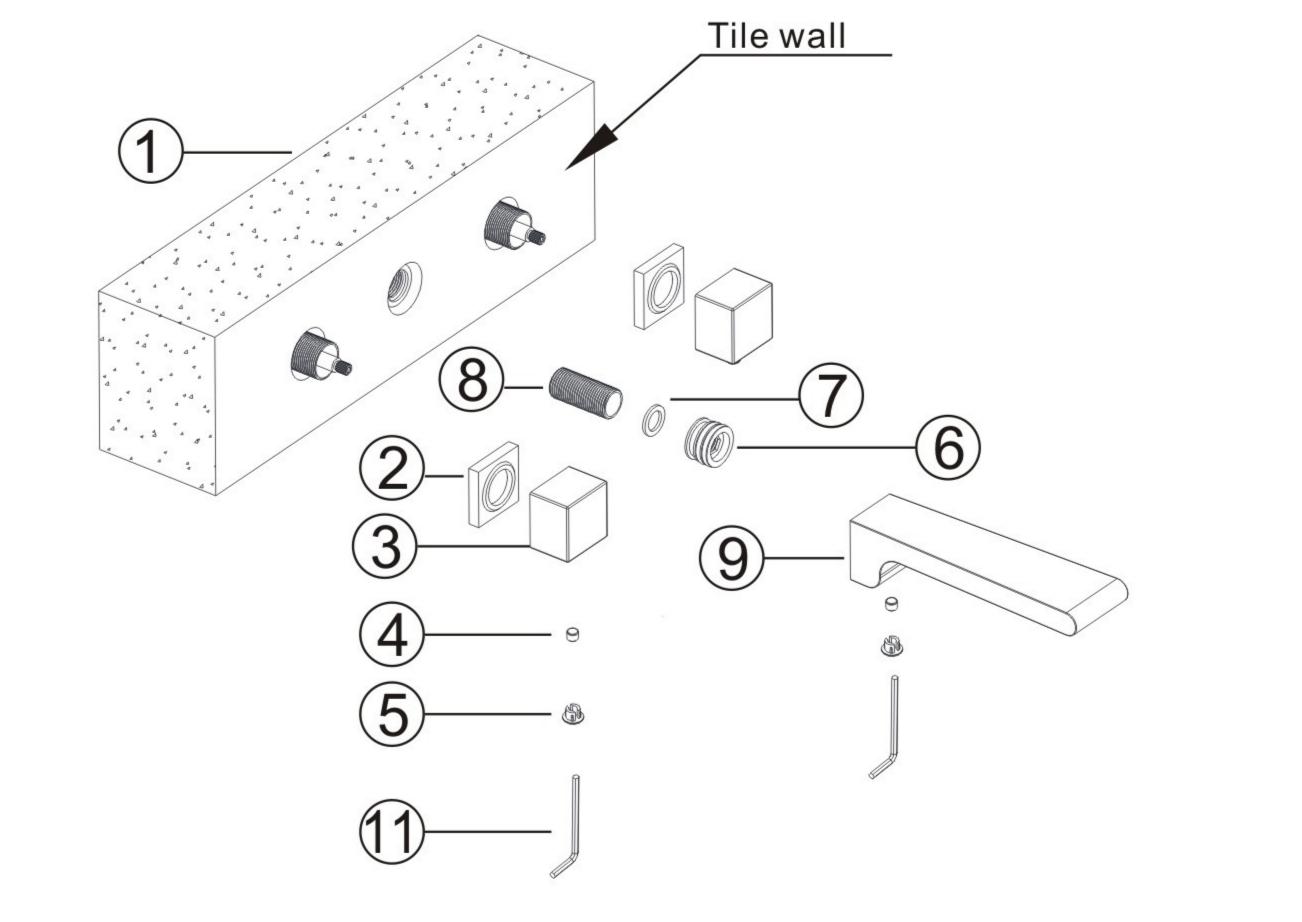

- 1. Take @Male brass joint away from @Main body, pay attention to screw out, Taking care not to damage O-ring, Wrap the @Female brass joint with raw material tape.
 Then connect the Main body, In that order @Gasket @Male brass joint @Main body, Then install Screws and cup.
- 2. Install Panel and 3 Handle on the 1 Main body, then install 4 Handle screw and 5 cup.

Care and Maintenance In order to keep the mixer surface bright, please clean

the mixer regularly.



Avoid suing cleaning powder, harsh cleaning chemicals, brushes, and cloth with coarse surface to prevent scratching and corrosion.

Do not use acid cleaner to clean the faucet as it may cause surface corrosion of the faucet. If the faucet comes into contact with harmful acid substances, please rinse it with water immediately.



If a large-scale clean-up is necessary, follow these procedures:

- 1:Use clean water and soft cloth to remove dirt on the surface as much as possible.
- 2:Use one of the following cleaners to remove dirt on the surface
- Mild liquid cleaner.
- Colorless glass cleaner, powder cleaner which does not have abrasive function and can be dissolved completely.
- Polish liquid which does not abrasive function.
- 3:After cleaning, remove the cleansing agent with clean water completely and wipe with soft cotton cloth.