
Completedworks

Ring Size Guide

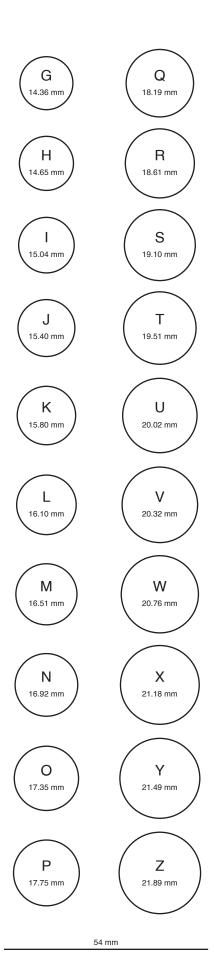

STEP 1

Print this document out in A4 size and scaled to 100%. To ensure accuracy, please check the printed size by measuring the line at the bottom of the page or by placing a credit card against the line to check the width of the credit card matches the length of the line.

STEP 2

Using the chart on the left, place a ring of yours and match the outer edge of the circle nearest in size to the inside diameter of your ring.

STEP 3

The measurement that best fits with the circle will be your ring size. If you are hesitating between two sizes, we tend to recommend that you choose the larger. You can use this measurement to order your ring with us.

Free Ring Sizer

If you are still not sure about your ring size we can send you a free sizer. Just email us or fill in the form on our size guide page. They're easy to use and come with full instructions so you can order with confidence. We can also send you a sizer out in the post before you order.

Measuring The Finger

Before measuring the finger on which you will wear your custom-made ring, please ensure the following:

- 1. Do not measure a finger when it is cold or too hot as this can have a significant effect on a ring size. For example, when your fingers are cold they can be at least half a size smaller.
- 2. For an accurate reading, measure your finger at the end of the day, when it is larger.

Choosing The Correct Size

Your ring should fit your finger comfortably. It should be snug enough so that it won't fall off, but loose enough to slide over your knuckle. Do not forget that there are significant differences between the right and left hand. It's also worth bearing in mind that rings with a particularly thick band will feel tighter than a thin band; in these cases, we recommend buying a full size larger than your normal ring size. Please make sure you order the correct size.

Completedworks

Ring Size Guide for Custom Fine Jewellery

INTERNAL DIAMETER	INTERNAL CIRCUMFERENCE	UK	US	EU	JAPAN
14.36	45.11	G	3 1/2	5.50	5
14.56	45.74	G 1/2	3 3/4	6	6
14.65	46.02	н	4	6.75	7
14.86	46.68	H 1/2	4 1/4	7.50	
15.04	47.25	I	4 1/2	8	8
15.27	47.97	I 1/2			
15.40	48.38	J	4 3/4	8.75	
15.70	49.32	J 1/2	5	9.25	9
15.80	49.64	К	5 1/4	10	
16	50.27	K 1/2	5 1/2	10.50	10
16.10	51	L	5 3/4	11.20	11
16.41	51.55	L 1/2	6	11.75	12
16.51	51.87	М	6 1/4	12.50	
16.71	52.50	M 1/2	6 1/2	13.25	13
16.92	53.16	N	6 3/4	13.75	
17.13	53.82	N 1/2		14.50	
17.35	54.10	0	7	15.10	14
17.45	54.82	O 1/2	7 1/4	15.75	
17.75	55.76	Р	7 1/2	16.25	15
17.97	56.45	P 1/2	7 3/4	17	
18.19	57.15	Q	8	17.50	16
18.35	57.65	Q 1/2	8 1/4	18.25	
18.75	58.90	R	8 1/2	18.90	17
18.80	59.06	R 1/2	8 3/4	19.50	
19.10	60	s	9	20.25	18
19.31	60.66	S 1/2	9 1/4	20.75	
19.56	61.40	т	9 1/2	21.40	
19.84	62.33	T 1/2	10	22	20
20.02	62.89	U	10 1/4	22.75	21
20.20	63.46	U 1/2	10 1/2	23.25	22
20.37	64	V	10 3/4	24	23
20.68	64.97	V 1/2	11	24.75	
20.76	65.22	w	11 1/4	25.25	
20.94	65.78	W 1/2	11 1/2	26	24
21.18	66.54	x	11 3/4	26.50	
21.30	66.92	X 1/2		27.25	
21.49	67.51	Y	12	27.75	25
21.69	68.14	Y 1/2	12 1/4		
21.89	68.77	z	12 1/2	29	26
22.10	69.43	Z 1/2	12 3/4	29.75	