
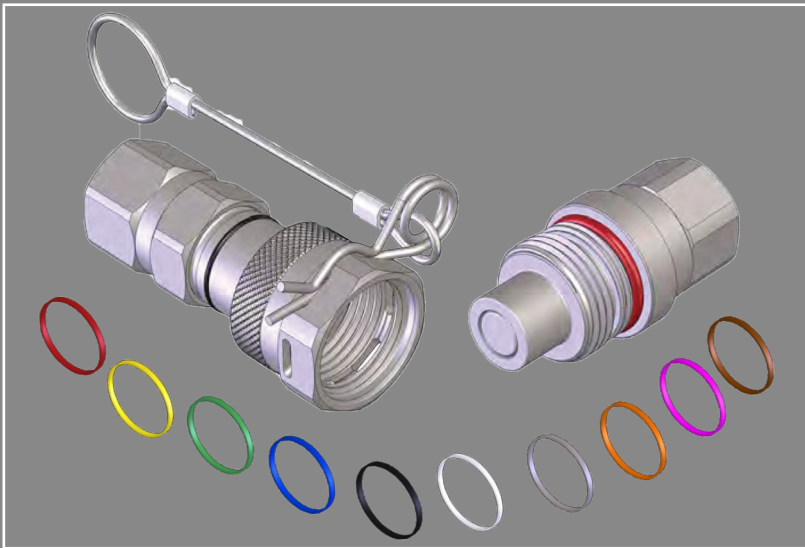


FSI-PINLOCK SERIES QUICK COUPLINGS

Flush Face - Screw Type - Connectable Under Pressure With Pin Lock
 Sizes: 1/4" thru 2"

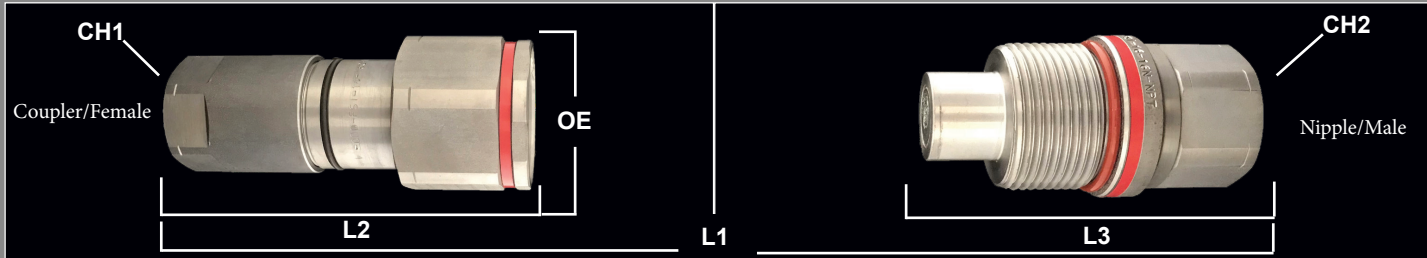

Features and Benefits

- Interchanges with Stucchi VEP
- High tech Z-786 anti-corrosion plating salt spray tested for 700 hours before any appearance of surface red rust
- High working pressures
- Connects and disconnects by hand up to 4,400 PSI
- Seal is blowout resistant to 4,400 PSI when connecting
- Exceeds 1,000,000 impulse cycles
- Flat face design eliminates spillage upon disconnection
- Thread to connect style coupling eliminates brinelling issues
- Heavy duty hex nut
- Standard threads: NPT, SAE, BSPP, DIN, Code 62

Applications

- FSI series couplings are used in a wide range of industrial markets when connecting and disconnecting is needed
- High pressure, low pressure drop and high impulse applications
- Drilling Rigs, Oilfield Services, Drilling Equipment, Cranes, Heavy Equipment, Hammer Attachments and much more

DIMENSIONAL & PRESSURE RATING DATA

Body Size	CH1	CH2	OE	L1	L2	L3	Optimal Flow Rate (GPM)	Max Flow Rate (GPM)	Max Working (PSI)	Fluid Spillage (cc)
04	.86	.86	1.53	4.58	2.34	2.64	3.17	6.34	6,525	.008
06	1.18	1.18	1.64	5.39	2.95	3.05	6.08	12.15	5,075	.010
08	1.41	1.41	1.96	6.00	4.35	3.56	12	24	5,075	.012
12	1.41	1.41	2.17	6.25	4.60	3.54	20	40	5,075	.015
16	1.61	1.61	2.32	7.50	5.26	4.21	26.5	53	5,075	.020
20	2.16	2.16	2.75	8.45	4.37	4.98	50	74	5,075	.030
24	2.75	2.95	3.89	9.68	4.70	6.04	100	185	4,350	.050

units: inches

Key Note:

- Color Safe System options available



ORDERING INFORMATION

QUICK COUPLING PART NUMBERING SYSTEM:

FSI-CC - 08 - 08 - C - NPT

FSI-CC SERIES	Body Size		Body Size		Thread Size		Thread Size		Coupler / Nipple		Thread Type	
	04	06	16	20	04	06	16	20	C	N	NPT	SAE
Flush Face Screw Type Coupling Connect under pressure color code	1/4"	3/8"	1"	1-1/4"	1/4"	3/8"	1"	1-1/4"	Coupler		NPT	O-Ring/UNF
	1/2"	3/4"	1-1/2"		1/2"	3/4"	1-1/2"	Nipple		BSP	British Standard Parallel	