


Trolley clamp model CTP

Capacities: 1000 - 3000kg

The easy installation to any beam makes the CTP suitable for fixing to any hoists, pulleys and loads you wish to move.

It can be adjusted quickly to the beam width by turning the main spindle and safety is ensured by the special locking lever.

The spindle and snap-pin stops are galvanised to protect against corrosion.

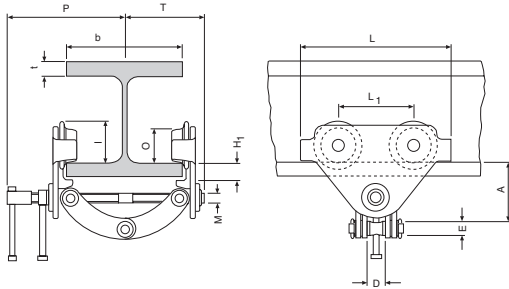

Model	Dimensions											
	A mm	D mm	E mm	H1 mm	I mm	L mm	L1 mm	M mm	O mm	P mm	T mm	t max. mm
CTP 1	82 - 109	26	22	20	53	160	75	M12	46	153	105	15
CTP 2-A	106 - 155	42	20	24	71.5	260	130	M18	60	205	139	25
CTP 2-B	136 - 191	42	20	24	71.5	260	130	M18	60	255	189	25
CTP 3-A	128 - 171	50	22	30.5	95.5	310	150	M24	80	220	155	25
CTP 3-B	150 - 212	50	22	30.5	95.5	310	150	M24	80	280	215	25

Model	Capacity (WLL) kg	Article number	Beam width mm	Minimum curve radius m	Weight kg
CTP - 1	1000	N05500024	60 - 150	0.6	2.5
CTP - 2A	2000	N05500025	75 - 200	0.9	9.9
CTP - 2B	2000	N05500026	200 - 300	0.9	10.3
CTP - 3A	3000	N05500027	75 - 200	1.15	17.5
CTP - 3B	3000	N05500028	200 - 320	1.15	19.5

NOTE: These trolleys are not designed for passenger elevation applications and must not be used for this purpose!