



# Melixon-S



①



②




③




④



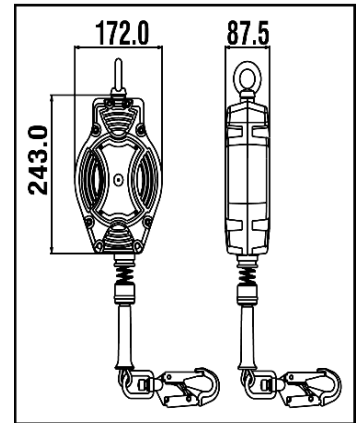







⑤





HS CODE
84798997







REF.	FA 20 402 10
LG.  KG	10 m
CE	EN 360:2002
MAT.  	Polyamide 6 - 30% fiber glass
	 STEEL Ø4.8 mm
	FA 50 101 17 / FA 50 203 20 with fall indicator x2
R(kN)	12 kN
	YES
+	PPE-R 11.060
	4.82 KG

LG.  
  
KG  
Length Max. user weight

MAT.  
  
  
Material of casing / wire rope

  
Material of top connector / bottom connector

  
Number of swivels

  
Approved for work near sharp edges