

Pfaff 'Silverline' Standard hand pallet trucks Lifting capacity 2500kg

Pfaff's range of hand pallet trucks have gained an enviable reputation for strength, quality & durability. All Pfaff trucks have a high-quality epoxy coating, a comfortable ergonomic handle which can be turned on 210° to the left and right side and can be supplied with varied steering / load wheel combinations.

We can offer two fork sizes in our Silverline (best seller) ranges to suit both the standard Euro and GKN pallet sizes.

Features and benefits include:

- Smooth and quiet motion due to the use of rubber rollers.
- Easy handling as the handle is released from the hydraulic system to the neutral position.
- Precisely adjustable pressure control valve to prevent damage from overloading.
- One-hand control for controlling all functions such as lifting, transporting and lowering.
- Ergonomic handlebar.
- Specially hardened axles, maintenance-free bearings and hard chrome-plated piston rods.
- Precision lowering valve to enable you to adjust the lowering speed to your requirements.



High quality rod assembly and lever giving controlled lifting and lowering

Double coated chrome piston with high quality seals reduce effort at maximum load

Investment casting with integrated oil reservoir. Increased safety with spring guard

High quality construction

Epoxy coated finish

210° steering left and right


Rubber wheels as standard although other options are available

Robust design with reinforced frame for greater strength

STANDARD HAND PALLET TRUCKS

Type			'Standard forks'	'Wide forks'
Lifting capacity	tonne	-	2.5	2.5
Steering/load wheels*	-	-	SR / PUR	SR / PUR
Wheel size (front)	mm	-	200 x 50	200 x 50
Load wheel size (rear)	mm	-	80 x 70	80 x 70
Number of wheels front/rear	-	-	2 / 4	2 / 4
Lifting height	mm	h^3	115	115
Load centre	mm	c	600	600
Height of steering handle	mm	h^{14}	1230	1230
Fork height when lowered	mm	h^{13}	85	85
Total unit length	mm	L^1	1555	1555
Useable fork length	mm	l	1150	1150
Fork width	mm	e	160	160
Fork thickness	mm	s	48	48
Inside of forks	mm	b^3	220	365
Outside fork width	mm	b^1	540	685
Floor/ground clearance	mm	m^1	37	37
Weight	kg	-	68	73

*Solid rubber (SR), Polyamide (PA), Polyurethane (PUR).

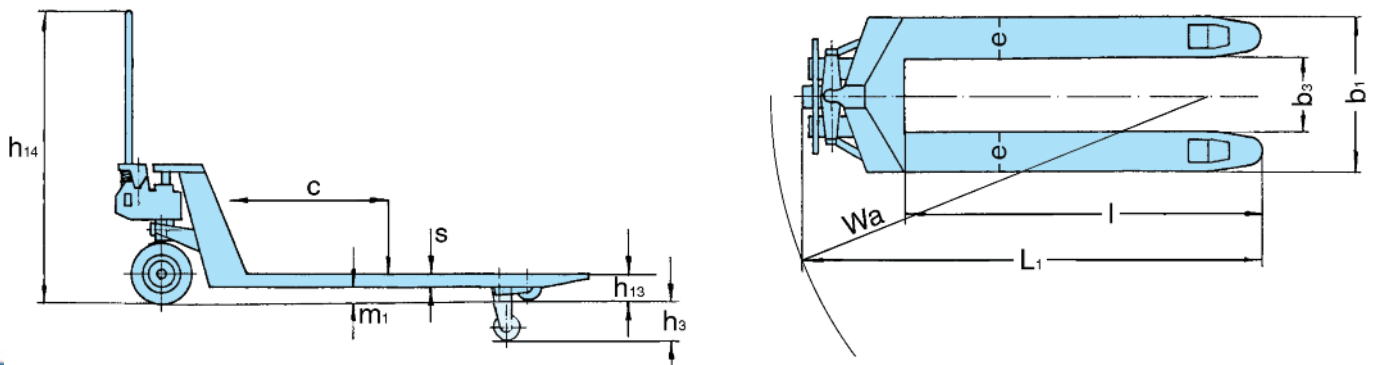

Reinforced pallet entry rollers.

Tandem rollers as standard.