

# STW-F 'PROLINE' STEEL JACKS (FIXED CLAW)

## Steel jacks with FIXED lifting claw Capacities: 1500 - 10000kg


Quality steel jacks used for lifting all types of loads across varying industries including ship repair, construction, maintenance and agriculture.

Load can be positioned on the head or the claw.

A very long service life is ensured via a robust steel housing and high quality spur gear, precise worked crank gear as well as additional worked pawl.

**Pfaff steel jacks are supplied with SIKU braked safety crank fitted as standard. SIFEKU and RAKU cranks are available on request.**

Article no.		40021975	40021984	40051705	40051707
Lifting capacity	kg	1500	3000	5000	10000
Minimum head height	mm	720	720	720	792
Minimum claw height	mm	60	61	62	85
Lift	mm	350	350	300	300
Weight	kg	12	21	26	42

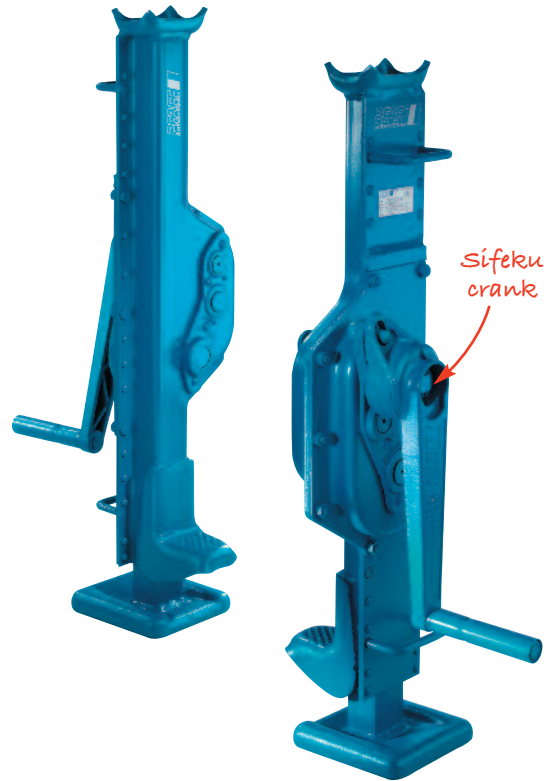

# STW-V STEEL JACKS (ADJUSTABLE CLAW)

## Steel jacks with ADJUSTABLE lifting claw Capacities: 3000 - 10000kg

Steel jacks with adjustable lifting claw designed for use in confined or tight areas. High quality spur gear and robust steel housing offer long service life.

The crank handle, in different executions, moves the jack shaft at the rack. The toe height of the claw can be adjusted to the required mounting or maintenance application.

**Pfaff steel jacks are supplied with SIKU braked safety crank fitted as standard. SIFEKU and RAKU cranks are available on request.**

Article no.		N01905001	N01905002	N01905003
Lifting capacity	kg	3000	5000	10000
Minimum head height	mm	720	720	792
Claw height - 1	mm	69	62	85
Claw height - 2	mm	166	159	191
Claw height - 3	mm	263	256	297
Claw height - 4	mm	360	353	403
Claw height - 5	mm	457	450	509
Claw height - 6	mm	554	547	615
Lift	mm	350	300	300
Weight	kg	25	30	48

