# TS-4L




## **INSTALLATION INSTRUCTIONS**

### Step 1: BASE ASSEMBLY

Remove just the hex nut and outter washer from the base, leaving the connector, threaded rod, inner washer and centering washers in place.


### Step 2: BASE ASSEMBLY

Insert the weight into the base. Slip on the washer, tighten the nut and stick on the felt.

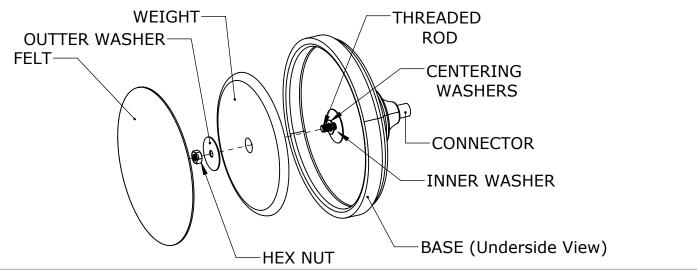

#### Step 3: TOP ASSEMBLY

Then set the base upright and screw the threaded rod into theconnector .Slip the tube over the thread rod and screw on the swiveling towel bars assembly.

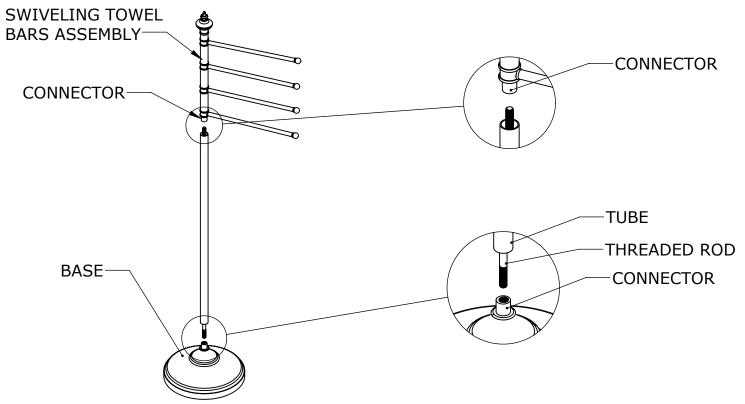

No portion of this document or any artwork contained herein should reproduced in any way without the written conset of ALLIED BRASS INC.