

# FAN39

Ventilation units with filter

**AIR FLOW RATE**

**920 - 940 m<sup>3</sup>/h**




Features	UoM	FIL35XN0B	FAN39BN0B	FAN39CN0B
Air flow rate	m <sup>3</sup> /h	-	920 - 940	920 - 940
Power supply	V ~ Hz	-	230 1~ 50-60	115 1~ 50-60
Dimensions HxWxD	mm	325x325x28	325x325x118	325x325x118
Power draw	W	-	105 - 140	110 - 136
Max current	A	-	0.48 - 0.62	1.10 - 1.20
Overcurrent protection	-	-	Internal motor	Internal motor
Electrical connection	-	-	Terminal board	Terminal board
Operating cycle	-	-	100%	100%
Temperature limits	°C	-30+75	-10+50	-10+50
IP rating EN60529	-	IP54	IP54	IP54
Noise level	dB (A)	-	65 - 68	65 - 68
FAN + FIL air flow rate	m <sup>3</sup> /h	-	1x FIL 35XN0B: 580 - 620	1x FIL 35XN0B: 580 - 620
Air flow direction	-	-	Ext to int. Reversible	Ext to int. Reversible
Filter (Eurovent)	-	EU4	EU4	EU4
Motor support	-	-	Bearings	Bearings
Lifetime L <sub>10</sub>	h	-	50000	50000
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE


**Accessories**

Pack of 10 fabric filters for FAN35	AAFFN35
Pack of 10 high efficiency fabric filters for FAN35	AAFFH35
0-60°C thermostat, normally open 10A	AAFTO12
5-60°C thermostat, change-over contact 10A	AAWTS10
Bellows kit for IP55 ingress protection	C12Z01052

**Performance**

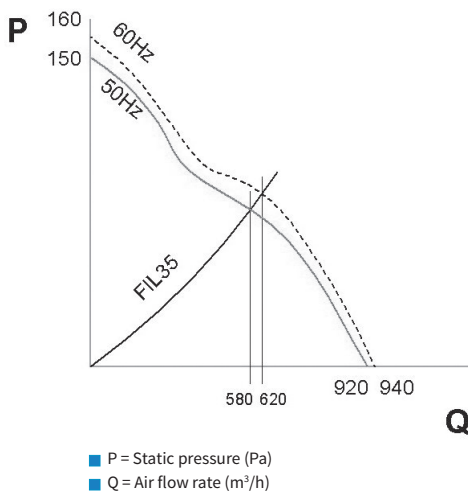

**Dimensions**

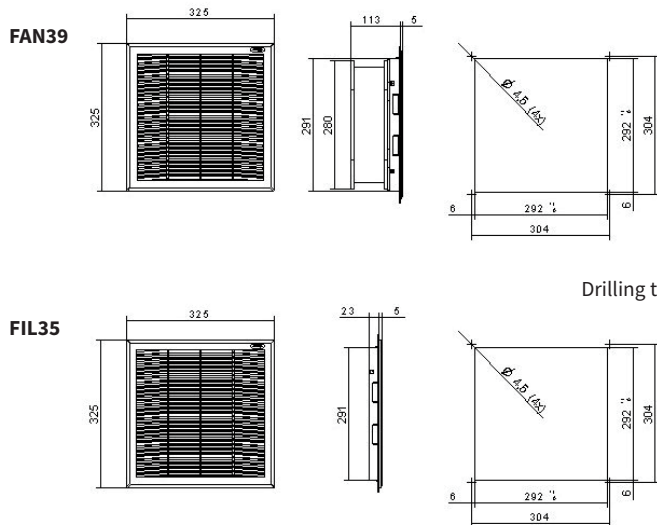

**Drilling templates**

N.B.: The drilling templates are only approximate. For any requirements, contact our technical/sales office.