

ACCESSORIES

AALGT10

LED-lamp with magnetic fixing

The AALGT10 led-lamp is suitable for all types of panels and enclosures, especially where space is limited.

The magnetic fixing, the integrated power unit, the input and output snap-lock connectors make the installation flexible, quick and safe.

It is possible to connect in series up to 10 lamps. The led technology ensure a longer service life of the lamps.




Female connector
For power supply cable.



Male connector
Only for daisy chain connection (max. 10 lamps).

LED-lamp
AALGT10

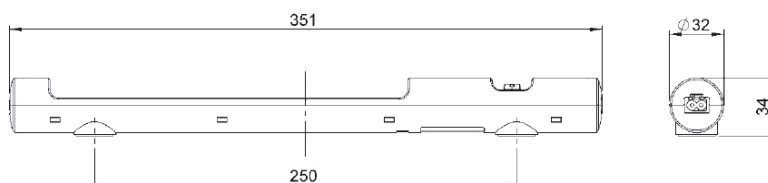

Characteristics	M.U.	AALGT10
Operating voltage	V - Hz	100-240 V AC, 50/60 Hz (min. 90 V AC, max. 265 V AC)
Power consumption	W	Max. 5
Luminosity	Lm	290 Lm a 120° (870Lm at 360° or equivalent 75W light bulb)
Lamp type	-	LED, angle of radiation 120°
Service life	h	60.000 h a +20 °C (+68 °F)
Connection	-	2-pole connector with snap lock AC: max. 2,5 A / 240 V AC, color: white
Mounting	-	magnet fixing
Casing	-	Plastic, transparent
Dimensions	mm	351 x 34 x 32
Weight	kg	0.2
Operating temperature	°C - °F	-30 °C ... +60 °C (-22 °F ... +140 °F)
Storage temperature	°C - °F	-40 °C ... +85 °C (-40 °F ... +185 °F)
Operating / Storage humidty	% RH	max. 90% RH (non-condensing)
Protection type/Protection class	IP	IP20 / II (double insulated)