


PADHOLDER PRO SERIES F110

GETAC F110 RUGGED TABLET

INSTRUCTIONS

STEP 1

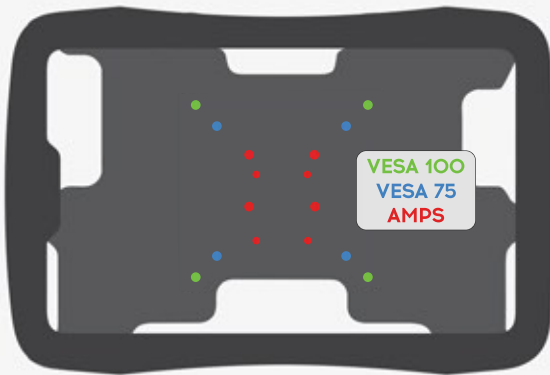

Determine which mounting pattern you are going to use with your mount. For VESA mounting use the tapered screws, installing them through the front of the back plate facing aft. If you're using the AMPS pattern, use the pan-head screws to install the mount on the back of the holder.

STEP 2

Slide your Getac F110 in to the holder from the side of the holder with the lock.



STEP 3

Press the lock in to lock the tablet in the holder. To unlock, place the key in the lock and turn clockwise.



Unit and parts have a 1 year manufacturer warranty. For technical assistance, product support, comments, or concerns, please contact us.

Self-installation instructions and advice are provided for your convenience. It is your responsibility to determine if you have the knowledge, skills, and physical ability required to properly perform an installation. PadHolder Products, LLC. shall have no liability for damage or injury resulting from the installation or use of any PadHolder or third party products. It is your responsibility to ensure that all products are installed in adherence with local laws and regulations and in such a manner as to allow a vehicle to be operated safely and without distraction. PadHolder Products, LLC. product warranties do not cover the installation, removal or re-installation of any product.