


MODEL 8491 Installation Instructions

Tools Needed:


Phillips Head Screwdriver 3/8" Wrench

(1) MOUNT TRACK

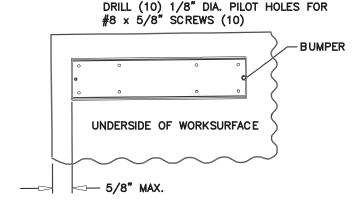



(3) INSTALL MECHANISM

REMOVE SHIPPING PIN ONLY AFTER MECHANISM IS INSERTED INTO THE MOUNTED TRACK. TO REMOVE SHIPPING PIN: TIP FRONT OF KEYBOARD TRAY UP AND BEGIN TO LOWER MECHANISM TO RELIEVE PRESSURE ON SHIPPING PIN. PULL OUT SHIPPING PIN. SLIDE MECHANISM BACK TO BUMPER.

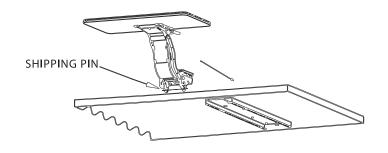

2) MOUNT KEYBOARD TRAY

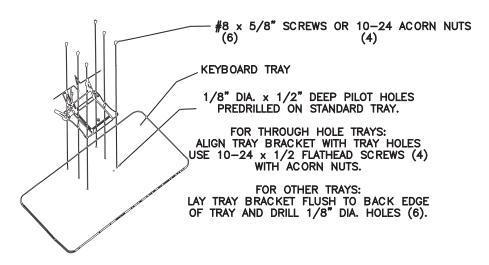

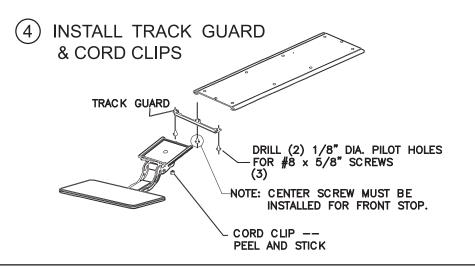



MODEL 8494 Installation Instructions


Hardware Included:


- (4) Acorn Nuts
- (4) Screws
- (4) Anti-Slip Keyboard Pads
- (1) Mouse Pad *
- (1) Mouse Catcher *
- * only with Mouse Set

Tools Needed:


Phillips Head Screwdriver Wrench Allen Wrench

RIGHT HAND MOUSE




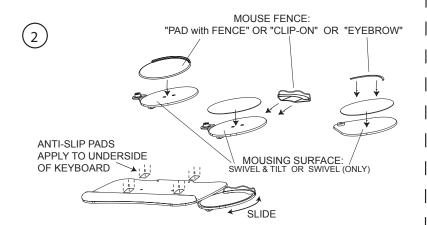


LEFT HAND MOUSE



REMOVE.
MAY BE ON TOP or BOTTOM
DEPENDING ON TRAY MODEL.





RE-ASSEMBLE MOUSE PAD AND APPROPRIATE MOUSE FENCE

