

One-touch ease-of-use wireless audio set that utilizes a digital transmission to seamlessly link audio sources. Equipped with both XLR and 3.5 mm (1/8") transmitters, this elegant solution makes capturing dialogue on a DSLR easier than ever before while maintaining a reliable connection.

FEATURES

- One touch ease-of-use
- 2.4 GHz digital transmission for worldwide operation
- 75 m range (250 ft) in optimal conditions
- Up to 5 hours battery life on a single charge
- Switch between multiple transmitters linked to one
- receiver
- · Mix and match different connector types
- Mute from either transmitter or receiver

DELIVERY INCLUDES

- XSW-D 3.5 mm (1/8") transmitter
- XSW-D female XLR transmitter
- XSW-D 3.5 mm (1/8") receiver
- ME 2-II clip-on lavalier mic
- 3.5 mm (1/8") coiled cable
- Cold Shoe mount
- Belt clip
- USB-A to USB-C charging cable
- Colored stickers for labelling
- Quick guide
- Safety guide

SPECIFICATIONS

USB C interface for charging:			
Input voltage	typ. 5.0 V		
Charging temperature	0 °C - 60 °C (32 °F - 140 °F)		
Charging time	typ. 3 h		
Battery pack:			
Cell type	Li-lon		
Nominal voltage	3.7 V		
Cell capacity	850 mAh		
Operating time	up to 5 h		
AF characteristics:			
Codec	aptX® Live		
Audio frequency response	3.5 mm Jack/XLR: 80 - 18.000 Hz		
	6.3 mm Jack:		
	10 - 18,000 Hz		
Audio output	max. 12 dBu		
Signal-to-noise ratio	≥ 106 dB		
THD	< 0.1 %		
Audio latency	< 4 ms		
Product properties:			
Dimensions			
XSW-D XLR FEMALE TX	approx. 102 x 24 x 28 mm		
XSW-D MINI JACK TX	approx. 86 x 24 x 28 mm		
XSW-D INSTRUMENT TX	approx. 122 x 24 x 28 mm		
XSW-D XLR MALE RX	approx. 109 x 24 x 28 mm		
XSW-D MINI JACK RX XSW-D INSTRUMENT RX	approx. 86 x 24 x 28 mm approx. 122 x 24 x 28 mm		
XSW-D PEDALBOARD RX	approx. 122 x 24 x 26 mm		
Weight			
XSW-D XLR FEMALE TX	approx. 86 g		
XSW-D MINI JACK TX	approx. 73 g		
XSW-D INSTRUMENT TX	approx. 77 g		
XSW-D XLR MALE RX	approx. 90 g		
XSW-D MINI JACK RX	approx. 73 g		
XSW-D INSTRUMENT RX	approx. 77 g		
XSW-D PEDALBOARD RX	approx. 890 g		
Frequency range	2,400 - 2,483.5MHz		
Transmission power (EIRP)	max. 10 mW		
Modulation	GFSK with TDMA		
Environmental conditions:			

Operating temperature	-10 °C to +55 °C (14 °F to 131 °F)
Relative humidity	95 % (non-condensing)

receiver

XS Wireless Digital Portable ENG Set


PRODUCT VARIANTS


ACCESSORIES


XSW-D PORTABLE ENG SET ME2-II, 3.5mm (1/8") transmitter,	Art. no. 508490	XSW-D XLR FEMALE TX Transmitter with female XLR input	Art. no. 508494
female XLR transmitter, 3.5mm (1/8") receiver		XSW-D MINI JACK TX Transmitter with 3.5mm (1/8") input	Art. no. 508495
Other sets:		XSW-D INSTRUMENT TX Transmitter with 6.3mm (1/4") input	Art. no. 508496
XSW-D VOCAL SET XS 1 handheld, female XLR transmitter, male XLR receiver	Art. no. 508484	XSW-D XLR MALE RX Receiver with male XLR output	Art. no. 508497
XSW-D LAVALIER SET ME2-II, 3.5mm (1/8") transmitter, male	Art. no. 508485	XSW-D INSTRUMENT RX Receiver with 6.3mm (1/4") output	Art. no. 508498
XLR receiver		XSW-D PEDALBOARD RX Receiver with 6.3mm (1/4") & male	Art. no. 508499
XSW-D PEDALBOARD SET 6.3mm (1/4") transmitter, pedalboard	Art. no. 508486	XLR outputs	
receiver	Art. no. 508488	XSW-D MINI JACK RX Receiver with 3.5mm (1/8") output	Art. no. 508500
XSW-D PORTABLE LAVALIER SETt ME2-II, 3.5mm (1/8") transmitter & 3.5mm (1/8") receiver		NT XSW-D PEDALBOARD Power supply for pedalboard receiver	Art. no. 508647
XSW-D PORTABLE INTERVIEW SET Female XLR transmitter, 3.5mm (1/8")	Art. no. 508489	CL 35 3.5mm (1/8") coiled output cable	Art. no. 508648
receiver		CI 63 6.2mm (1 ((")) extension input eable	Art. no. 508649
XSW-D XLR BASE SET Female XLR transmitter, male XLR receiver	Art. no. 508491	6.3mm (1/4") extension input cable XSW-D BELTPACK CLIP Transmitter belt clip	Art. no. 508650
XSW-D PRESENTATION BASE SET 3.5mm (1/8") transmitter, male XLR receiver	Art. no. 508492	XSW-D HOTSHOE MOUNT Camera mount for XSW-D receivers	Art. no. 508651
XSW-D INSTRUMENT BASE SET 6.3mm (1/4") transmitter, 6.3mm (1/4") receiver	Art. no. 508493		
XSW-D PORTABLE BASE SET 3.5mm (1/8") transmitter, 3.5mm (1/8")	Art. no. 508621		

DIMENSIONS

XSW-D XLR FEMALE TX

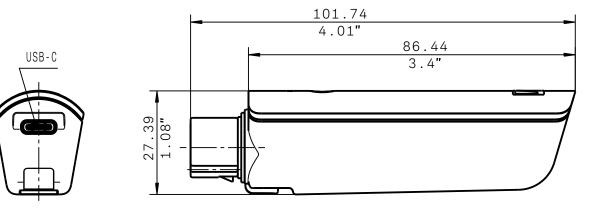

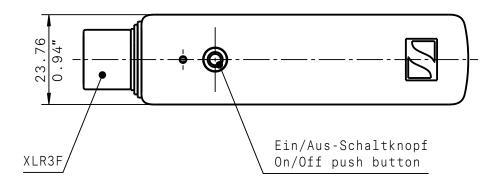

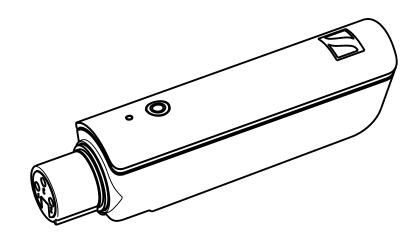

DIMENSIONS

XSW-D MINI JACK TX | XSW-D MINI JACK RX

