

Instructions

Where to get the app:

Please search "scent marketing" in Google play or App store and you will find it.



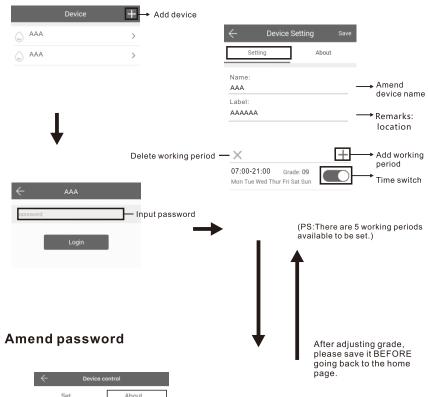


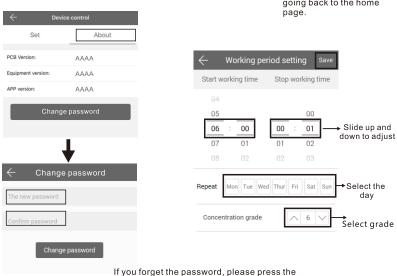

reset button to restore the factory settings.
The factory settings password is 8888.


PRODUCT MANUAL

SCENT MARKETING



AE105-APP

Reminding




Concentration and Consumption

Grade	G1	G2	G3	G4	G5
Intervals (min)	15	13.5	12	10.5	9
Grade	G6	G7	G8	G9	G10
Intervals (min)	7.5	6	4.5	3	1.5

Notes:

- 1、100ml oils can diffuse 6300-6700 times under normal circumstances.
- 2. All of the above grade atomization work time is 3 seconds.
- 3. Different grade and oil may with different consumption.

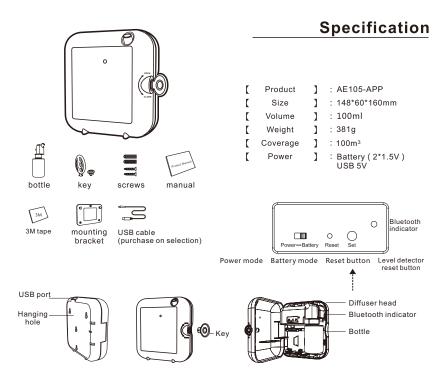

⚠ Warning

- 1. Please keep the machine vertical. Tilt or lie flatly may cause oil overflow. The machine efficiency may be affected.





- 2. Shall not modify, disassemble or repair the machine. If any failure happens to the machine, please contact our technical personnel.
- 3. When the machine is first used or hasn't been used for more than 7 days, the controlling board is out of power. Please insert the batteries/plug in and wait for 1-2 minutes, the machine will be back on automaticlly.

Equipment cleaning


The machine needs to be cleaned when below situations happen:

- 1. You're about to change to another kind of essential oil.
- 2. The atomization volume becomes weak.


Cleaning steps:

- 1. Pull out the atomized head, loose the bottle.
- 2. Refill industrial alcohol into bottle about 15%, make it diffuse 5-10 times.
- 3. Airing the atomized head and the bottle.

Installation



- Insert the key and the mating part, twirl to "OPEN" and then pull them out. Press the fixed button on the top and push forward.
- 2. Tightly connect the atomizer head and the fragrance bottle, and install them to the machine.
- 3. Choose "Power mode" or "Battery mode", plug in or insert the battery. (Please wait about 12 minutes to let machine charged on the first time connect with power.)
- 4. Insert the key to the mating parts, then insert them to the keyhole, twirl to "CLOSE" for locking.

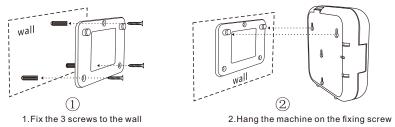

Warning: If you use 3M instead of screw to the wall, please press 3M on the wall 1 minute and then hang machine on.

Troubleshooting

Before asking to have the machine repaired, please try to diagnose the problem first following to bellow instructions.

Breakdown	Solution	
Does not diffuse	-Check whether the mode you choose is correct or notCheck if the machine is during "Non-Working period" -Air pump may be damaged, change a new oneCheck whether the tube is loose or not	
Low diffusion	-The atomizing core is blocked, clean by alcohol or change a new componentCheck whether the gasket is damange/loose or notCheck whether the tube is loose or not	
Oil spill	-Check whether the bottle is loose or not -The gasket in the atomized head is damaged or loose.	
Oil sprinkle	-The atomized head is damaged, change a new one -The machine is tilled or lie down, keep the machine vertical.	
Abnormal noise	-The air pump is loose, retighten the pump -The air pump is damaged, change a new one.	