

How to connect

Installation takes about 15 minutes.

Disconnect CCFL lamp wire harness from main board

Disconnect Screen wire harness on your old LCD

Remove the old LCD

Mount our Direct Replacement LCD back to the same location


Connect Screen wire harness to our Direct Replacement LCD

Connect other end of the wire adapter to main board

Our Direct Replacement LCD has the same interface connector, dimension and screw hole as the old LCD.

Our Direct Replacement LCD included the following items:

- 1) LCD screen (it has upgraded to Sunlight Readable LED kit)
- 1) MS610UB LED driver
- 1) Wire adapter

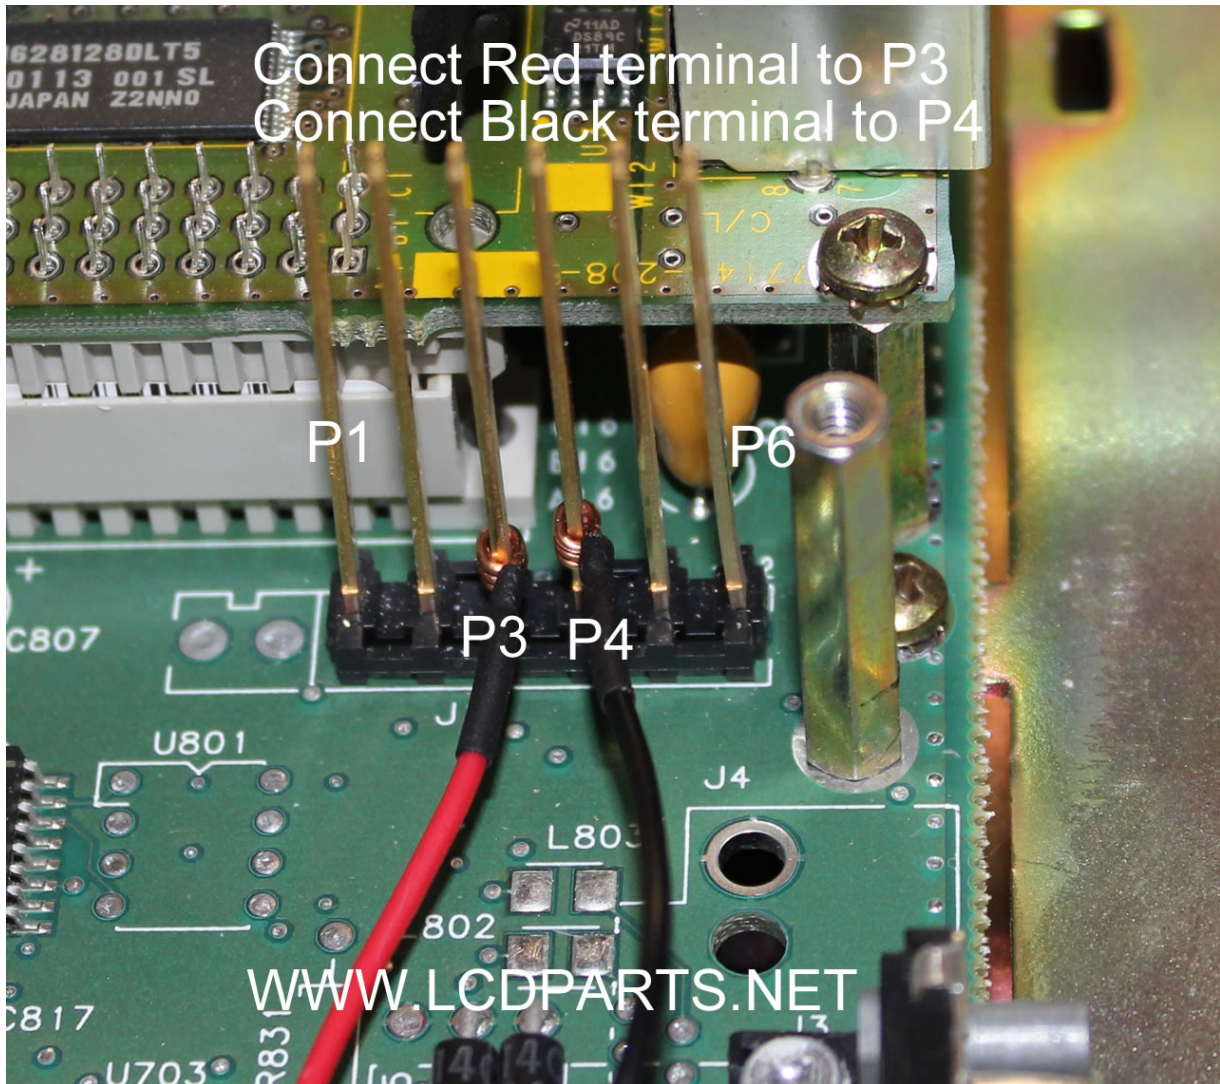

Looking for technical assistance?

We love to help!

Please visit us online at

http://store.lcdparts.net/tech-support_ep_45.html

MoniServ, Inc. | <http://lcdpart.com> | techsupport@lcdparts.net
1600 Noriega Street | San Francisco | CA 94122 | 1-415-682-8685

MoniServ, Inc. | <http://lcdpart.com> | techsupport@lcdparts.net
1600 Noriega Street | San Francisco | CA 94122 | 1-415-682-8685