



- (f) @boacay
- **©** @boacay
- @boacay
- support@boacay.com
- (646) 450-4851

www.boacay.com

TABLE OF CONTENTS

0	INTRODUCTION4
	TERMS OF USE5
A	WARNINGS & SAFETY PRECAUTIONS6
②	IMPORTANT POINTS TO REMEMBER8
	WHAT'S IN THE BOX?9
	PRODUCT DESCRIPTION10
	PRODUCT STRUCTURE11
O°	OPERATING INSTRUCTIONS12
	• CARS WITH SIDE RAILS13
	• CARS WITH CROSSBARS18
	• CARS WITH SIDE RAILS AND CROSSBARS23
	• CARS WITH BASKET23
	• CARS WITHOUT RACK24
9	RECOMMENDATIONS ON STRAPS POSITIONING30
a	HOW TO SET THE COMBINATION LOCK31
*	STORAGE AND MAINTENANCE32
X	TROUBLESHOOTING33
Q/A	FAQ
	PRODUCT SPECIFICATIONS35
9	WARRANTY36
	CONTACT US37



Thank you for purchasing our Rooftop Cargo Carrier.

This manual contains the instructions you will need to operate and maintain your model so that you can enjoy it for years to come. Rest assured that Boacay is a team of professionals who aim to provide the highest level of customer support possible.

We know you're excited about trying your new rooftop cargo bag, but it's essential that you take some time to read through the User's Manual. This manual contains all the necessary setup and handling procedures that will allow you to unlock the performance potential that Boacay engineers designed into your model. Be sure to read and follow the WARNINGS & SAFETY PRECAUTIONS in this manual and any labels or tags attached to your model. They are there to educate you on how to use your model safely and also get maximum life and performance from it. Even if you are an expert in rooftop cargo carriers, it's important to read and follow the procedures in this manual.

Thank you again for choosing Boacay. We work hard every day to ensure you receive the highest level of customer satisfaction possible.

We genuinely want you to enjoy your rooftop cargo carrier!

Find the most updated version of this User Manual on www.boacay.com, under Rooftop Cargo Carriers section.

If you have any questions about your model or its operation, call Boacay Customer Support at (646) 450-4851 or E-mail: support@boacay.com.

TERMS OF USE

This product is surrendered by Boacay to the purchaser with the understanding that the purchaser accepts the responsibility of using this rooftop cargo carrier, and using the enclosed accessories in a careless, improper, or unsafe manner can result in serious injury or death. Also, the purchaser assumes all liability resulting from any misuse, unsafe handling, failure to follow instructions or any action that constitutes a violation of any applicable laws or regulations. Boacay shall not be liable for personal injury, loss of property, or loss of life resulting from the use of this product under any circumstances, including intentional, reckless, negligent, or accidental behavior. Boacay shall also not be liable for any special, indirect, incidental, or consequential damages arising out of the assembly, installation, or use of their products or any accessory or chemical required to use their products. Boacay has no control over the way the buyer installs the carrier, and therefore we cannot assume any responsibility for any damage or loss resulting from its installation.

By the act of operating/using the product, the user accepts all resulting liability and releases Boacay of all liability associated with its use. If you as the user do not accept liability of Usership, Boacay requests that you do not use this product. Do not open any of the enclosed materials. Return the model to Boacay, but please be advised that we absolutely cannot accept an item for return or exchange after it has been used or is no longer in as-new condition.

All information contained in this User Manual is subject to change without notice. Boacay reserves the right to make changes and improvements to products without incurring any obligation to incorporate such improvements into products previously sold. If you have any questions about your rooftop cargo carrier, call Boacay Customer Support at (646) 450-4851 or E-mail: support@boacay.com.



WARNINGS & SAFETY PRECAUTIONS

Safety is your responsibility!

Please read and make sure you understand each warning and safety precaution before using Boacay rooftop cargo carrier. Failure to follow the information contained in this User Manual could cause serious injury or damage to the product.

Operate your model sensibly and with care, and it will be safe for you and those around you. The precautions outlined in this manual should be strictly followed to help ensure safe handling.

Before using this rooftop cargo carrier, please read the OPERATING INSTRUCTIONS section to ensure the correct use and keep this User Manual in a safe place. If the cargo bag is damaged due to failure to follow the instructions in this manual, the company reserves the right not to carry out quality assurance.

- Please **check the rated roof capacity in your vehicle's user manual** before using this rooftop cargo carrier. DO NOT exceed the rated roof capacity of your car under any circumstances!
- DO NOT use the cargo bag to transport **people**, **animals**, or **flammable liquids**.
- DO NOT use the rooftop cargo bag mounted on the vehicle without cargo. Slowly unpack, and when the cargo bag is fully unloaded, remove it from the roof of the car.
- The zipper must be fully closed. The zipper slider must reach the carrier's back, and the zipper flap must point down to prevent water entry through the zipper.
- DO NOT remove the cargo bag from the car roof while it is fully loaded.
- During handling, pay attention to all the warnings included in this User Manual and operate accordingly.
- Loose fabric creases cause noise, lower gas mileage, and damage the fabric. Hold down the loose creases with straps.

- DO NOT exceed the **speed limit** while driving with the cargo bag installed on the vehicle's roof! If you hear any flapping noises while driving, pull over immediately, and double-check installation.
- DO NOT place sharp objects in the cargo bag. If you can't prevent bringing things with sharp edges, cover them with cloth material.
- Place them in the middle of the cargo bag and surround them with soft objects.
- Always check the product before use **to ensure it is undamaged**. The use of a damaged product can be unsafe.
- This product is intended to be used **only by adults** and it should not be given to children!
- DO NOT use the product in case of severe winds.
- DO NOT use solvent-based detergents, alkali, acidic detergents, steam blasters, or high-pressure washers to clean the cargo bag.
- DO NOT expose the product to fire.
- Never use the straps to secure an additional cargo bag or object. All the items have to be placed inside the cargo bag.
- The Lock DOES NOT offer a full security. Avoid leaving the rooftop cargo bag unattended when your vehicle is parked.
- **Distribute the weight of your load evenly** to prevent damaging or denting the roof of your vehicle.
- Do not attach the straps to any part of your crossbars and/or side rails that are NOT designed to support a roof cargo bag.
- For the carrier to be 100% waterproof, the non-zippered aerodynamic end must be facing the front of the vehicle. The (2) zipper heads must be located in the center of the rear side, under the logo, and the hook-&-loop closure on the flap must be secured.
- It is NOT recommended to use the cargo bag on glass roof surfaces like sunroofs/moonroofs and panoramic roofs. The cargo bag's weight can damage or shatter the glass roofs. You can use the roof-top cargo carrier on a sunroof/moonroof or panoramic roof ONLY if you have crossbars installed on your car and they can SUPPORT the bag's weight.
- DO NOT use the product on trailers or towed vehicles.
- The product is not intended for an off-road use.
- Make sure you check all straps for tightness at regular intervals during travel.

IMPORTANT POINTS TO REMEMBER

Safety is your responsibility!

- Check local and state laws governing the projection of objects beyond the perimeter of a vehicle. Be aware of your cargo bag's width and height since low clearance branches, bridges, and parking garages can affect the load.
- To preserve the bag's aerodynamic features, you have to pack the carrier full, so there won't be any excess material. If you are unable to pack it fully, we suggest you fill the extra space with any light material (bubble wrap, foam, etc.). If there is still excess material, please secure it in place with the carrier's straps. Damage may occur to the cargo bag if excess material flaps in the wind.
- Avoid long-term storage in direct sunlight, which usually causes color fading.
- When cleaning the product, use a damp cloth to wipe it.
- Please store the product in its drawstring bag if stored/idle for a long time. Always keep the product in a dry place, out of reach of children or pets.
- During cold weather, apply a small amount of lubricant to the outer surface of the zipper. Run the zipper head over the lubricant and around the carrier several times to ensure proper lubrication. Petroleum jelly and lip balm can also be used as alternatives. Do not apply the lubricant on the zipper teeth.
- Make sure the logo on the product faces the back of your vehicle.
- When mounting a roof rack system, always make sure that all knobs, screws, straps, bolts and locks are securely and firmly attached, tightened and locked before loading the cargo bag.
- Put the heavier items at the bottom of your rooftop cargo carrier.
- Cover your belongings with a clear plastic bag for double protection against any moisture that may be produced during a very long travel or sudden weather change.

8



WHAT'S IN THE BOX?



1x Rooftop Cargo Carrier



1x Drawstring Bag



1x Non-slip Mat



6x Hooks



4x Detachable Straps (2x Short Straps, 2x Long Straps)



1x Combination Lock



1x User Manual



1x Warranty Card

Note!

Check whether the accessories are all or not available according to the list above. Please contact us within 24 hours in case any accessories missing are damaged.

PRODUCT DESCRIPTION

No matter how light you try to pack or what type of car you use, some days, there is just not enough space in your vehicle to accommodate all your belongings.

We know this, so that's why we want to bring you a solution to the "no more space in the car" dilemma.

Whether you need extra space for leisure travel, business, or personal, you can never go wrong with Boacay rooftop cargo carrier.

Our Waterproof Cargo Bag is made of top-quality material and with proper care, installation, and storage, it will last you for years to come. It is designed to offer extra space on your car so you can keep your valuable belongings protected. The aerodynamic design is specially engineered to make sure the safety of your items, while its generous space allows you to travel peacefully with your family or friends.

Developed to withstand long journeys, this product offers an excellent balance of durability and strength, and is made of 100% waterproof military-grade PVC canvas.



PRODUCT STRUCTURE



2x Fixed Straps



1x Waterproof Zipper



2x Metal Zipper Pulls with lock holes



Waterproof PVC Surface



Enclosed Space



4x Anchoring Points

Attention!

The proper installation of the rooftop cargo carrier is very important and plays a critical role in the safety of your trip!

Also, please remember that if the straps have not been fastened properly, they can loosen during travel. Stop occasionally and make sure they are well caught.

Please make sure to follow all the steps listed below.

Important! If you own a two-door car you must have a roof rack (side rails or crossbars) to install the rooftop cargo carrier!

Important! This rooftop cargo carrier IS NOT designed to be used on a car with frameless doors!*

*Explanation: The aerodynamic shape of the cargo bag is preserved by the 2 fixed front straps, so they must always be attached to the front door of the car, regardless that you have a roof rack or not. Because the cars with frameless doors don't have a frame to tightly secure the hooks of the straps, they are not suitable for the use of Boacay cargo bag.

Note: A minimum of two detachable straps must be used at all times. If your vehicle has both side rails and crossbars - You can use all four detachable straps.



CARS WITH RACK

A. CARS WITH SIDE RAILS

1. The roof of the car has to be clean. Check that there is no debris, dirt, dust or water on it. Place the protective mat that comes in the package on the vehicle roof.





2. Unzip the cargo bag and place it on the vehicle roof between the side rails.







Note: The aerodynamic part of the cargo bag should face the front of the car. (The logo should face the back of the car).

Caution: Before loading, consult vehicle's user manual for the weight limitations. Do not place more weight than allowed under any circumstances.

3. Consider placing items in plastic bags before loading for extra protection from water condensation.




4. Load the cargo into the carrier. Place heavy, large objects in first. You may need a partner to help you. Continue loading lighter items on the top, creating a compact load.






- 5. Please distribute the load weight equally on the entire cargo bag surface.
- 6. Cover the load with the top of the cargo bag. Close the zipper and lock it with the combination lock to add extra security to your rooftop cargo bag. Cover the zipper completely with the flap above it. Keep the flap in place and secure it by using the hook and loop fasteners. Make sure that the zipper pulls are not between the hook and loop fasteners, as this will prevent a secure hold.







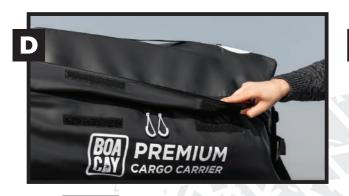





7. Feed the short detachable straps through the anchoring points.



8. Loop both ends of each strap under a side rail. Engage the buckles. Alternate tightening both ends of each strap until the cargo bag is secure.












9. The 2 front fixed straps have to ALWAYS be attached under the rubber seal of each front door (Driver's Seat and Front Passenger's Seat) by using the hooks that come in the package. Pull down the rubber seal of each front door and attach the hook to the metal car frame as far forward as possible.







10. Push back the rubber seal to secure the hook.





11. Loop the straps through the hook's hole and engage the buckles. Alternate tightening both straps until the cargo bag is tight enough.













12. **For ALL the straps:** Tie off the strap excess with the attached strap retainers to prevent the straps from flapping while driving.











B. CARS WITH CROSSBARS

1. The roof of the car has to be clean. Check that there is no debris, dirt, dust, or water on it. Place the protective mat that comes in the package on the vehicle roof.





Attention! If the rooftop cargo carrier will stay ON the crossbars without touching the roof of the car, there is NO NEED to use the protective mat.

2. Unzip the cargo bag and place it on the vehicle roof BETWEEN the crossbars or ON crossbars (depending on how close or far they are to each other).







Note: The aerodynamic part of the cargo bag should face the front of the car. (The logo should face the back of the car).

Caution: Before loading, consult vehicle's user manual for the weight limitations. Do not place more weight than allowed under any circumstances.



- 3. Consider placing items in plastic bags before loading for extra protection from water condensation.
- 4. Load the cargo into the carrier. Place heavy, large objects in first. You may need a partner to help you. Continue loading lighter items on the top, creating a compact load.





- 5. Please distribute the load weight equally on the entire cargo bag surface.
- 6. Cover the load with the top of the cargo bag. Close the zipper and lock it with the combination lock to add extra security to your rooftop cargo bag. Cover the zipper completely with the flap above it. Keep the flap in place and secure it by using the hook and loop fasteners. Make sure that the zipper pulls are not between the hook and loop fasteners, as this will prevent a secure hold.













7. Feed the long detachable straps through the anchoring points.



8. Loop both ends of each strap under a crossbar. Engage the buckles. Alternate tightening both ends of each strap until the cargo bag is secure.












9. The 2 front fixed straps have to ALWAYS be attached under the rubber seal of each front door (Driver's Seat and Front Passenger's Seat) by using the hooks that come in the package. Pull down the rubber seal of each front door and attach the hook to the metal car frame as far forward as possible.







10. Push back the rubber seal to secure the hook.





11. Loop the straps through the hook's hole and engage the buckles. Alternate tightening both straps until the cargo bag is tight enough.













12. **For ALL the straps:** Tie off the strap excess with the attached strap retainers to prevent the straps from flapping while driving.











C. CARS WITH SIDE RAILS AND CROSSBARS

If you have both Side Rails and Crossbars installed on your car, you can choose whether to use the installation process from cars with side rails (A) or from cars with crossbars (B). Also, as your Boacay cargo bag comes with 4 detachable straps, you can install it on both side rails and crossbars for extra protection.

Attention! If you are going to install the rooftop cargo carrier on both side rails and crossbars, don't forget to use the two short straps for the side rails and the two long straps for the crossbars.

D. CARS WITH BASKET

If you have a basket installed on your car, you can choose whether to use the installation process from cars with side rails (A) or from cars with crossbars (B). Also, as your Boacay cargo bag comes with 4 detachable straps, you can secure it with all of them for extra protection.

Attention! If you are going to install the rooftop cargo carrier with all 4 detachable straps, don't forget to use the two short straps for the side rails and the two long straps for the crossbars.



CARS WITHOUT RACK

1. The roof of the car has to be clean. Check that there is no debris, dirt, dust, or water on it. Place the protective mat that comes in the package on the vehicle roof.





2. Unzip the cargo bag and place it on the vehicle roof.







Note: The aerodynamic part of the cargo bag should face the front of the car. (The logo should face the back of the car).

Caution: Before loading, consult vehicle's user manual for the weight limitations. Do not place more weight than allowed under any circumstances.

3. Consider placing the items in plastic bags before loading for extra protection from water condensation.



4. Load the cargo into the carrier. Place heavy, large objects in first. You may need a partner to help you. Continue loading lighter items on the top, creating a compact load.





- 5. Please distribute the load weight equally on the entire cargo bag surface.
- 6. Cover the load with the top of the cargo bag. Close the zipper and lock it with the combination lock to add extra security to your rooftop cargo bag. Cover the zipper completely with the flap above it. Keep the flap in place and secure it by using the hook and loop fasteners. Make sure that the zipper pulls are not between the hook and loop fasteners, as this will prevent a secure hold.













7. Feed the short detachable straps through the anchoring points.



Attention! Check where the detachable straps are headed. Depending on the size of your car, you may need to attach all the hooks for the detachable straps under the rubber of the rear doors. However, for the majority of the cars, one detachable strap should be attached to the front doors, and the other detachable strap to the rear doors as follows:

8. Pull down the rubber seal of the front door and attach a hook to the metal car's frame. The hook and the detachable strap should be aligned vertically. You can choose to start with either the driver's door or the front passenger's door.







9. Push back the rubber seal to secure the hook.



10. Loop the straps through the hook's hole and engage the buckles. Repeat the process for the parallel door and alternate tightening both ends of the strap until the cargo bag is tight enough.







- 11. Repeat the process from the 8^{th} , 9^{th} and 10^{th} points for the rear doors of the car.
- 12. The 2 front fixed straps have to ALWAYS be attached under the rubber seal of each front door (Driver's Seat and Front Passenger's Seat) by using the hooks that come in the package.

Pull down the rubber seal of each front door and attach the hook to the metal car's frame as far forward as possible.









13. Push back the rubber seal to secure the hook.





14. Loop the straps through the hook's hole and engage the buckles. Alternate tightening both straps until the rooftop cargo carrier is tight enough.













15. **For ALL the straps:** Tie off the strap excess with the attached strap retainers to prevent the straps from flapping while driving.









CORRECT STRAP ANGLES FOR CARS WITH SIDE RAILS OR WITHOUT A RACK

For cars with Side Rails or Without a Rack, the best option to install the rooftop cargo carrier is to place the 2 detachable straps vertically, against the door frames. After the installation, the 2 detachable straps should be parallel. The 2 fixed straps should always be attached under the rubber seal of each front door, as far forward as possible.

Attention! Never attach the detachable straps X-shaped!

CORRECT STRAP ANGLES FOR CARS WITH CROSSBARS

For cars with Crossbars, the best option to install the rooftop cargo carrier is to tie the 2 ends of each detachable strap to one crossbar (front and rear) in a straight direction. After the installation, the 2 detachable straps should be parallel. The 2 fixed straps should always be attached under the rubber seal of each front door, as far forward as possible.

Attention! Never attach the detachable straps X-shaped!

HOW TO SET THE COMBINATION LOCK

Note: The initial password of the combination lock is: 0000.

1. Set the dials at 0-0-0-0 and pull out the shackle.



2. Turn the shackle at 90° counterclockwise. Press and hold the shackle down. Set your four-digit combination by rotating the dials and align the numbers vertically.







- 3. Release the shackle, turn it back as normal, and lock it.
- 4. Turn the dials around a few times, and enter in your new combination to test that is has been successfully set.







.♦••

STORAGE AND MAINTENANCE

Operating and storage environments may influence product life and the reliability of performance. Thus, remember to:

- After every use, clean the cargo bag with a damp cloth and let it air dry.
- Do not tumble dry.
- Never use solvent-based detergents as they may affect the chemical composition of the bag material.
- Do not clean the product with any alkali, acidic detergents, steam blasters or high-pressure washers.
- Do not hand wash or machine wash the cargo bag, as this may affect the structure of the product.
- Storage the rooftop cargo carrier in its bag to protect it from dust.
- Place the product in a dry and well-ventilated area with mild temperature (suitable temperature: 32°F-104°F (0°C-40°C), suitable relative humidity 10% ~ 90%).
- Place the product in a safe area where it will not be hit or damaged.
- Keep the product away from corrosive and combustible material.
- Store the product away from sharp objects and direct sunlight.

If you have any technical problem with the product, please provide the following information to our customer service team at support@boacay.com:

About the product:

- (1) Model (You can find it in the PRODUCT SPECIFICATIONS Section.)
- (2) Order No
- (3) Description of your problem
- (4) Has it happened before?
- (5) In what circumstance does the problem occur?



1. Do I need to have both side rails and crossbars to use this product on my car?

No, you don't need to have both side rails and crossbars to use our roof-top cargo bag. You can have whether side rails, whether crossbars, both or none. In all 4 situations, you can use our Boacay rooftop cargo carrier.

2. Will this cargo bag work for a minivan without roof rack?

Yes, the Boacay rooftop cargo bag works perfectly for a minivan whether it has a roof rack or not.

3. Can I install this product on a car with sunroof/moonroof, or panoramic roof?

You can use the Boacay Rooftop Cargo Carrier on a car with sunroof/moonroof or panoramic roof ONLY if you have crossbars installed on your car and they can SUPPORT the weight of the bag. Do not place the cargo bag directly on a glass roof as it may not support the weight of the bag's content.

4. Can this product be used on a minivan with sliding doors?

The Boacay cargo bag can be used on a minivan with sliding doors only if the vehicle has side rails or crossbars installed.

5. Is this cargo bag waterproof?

The Boacay rooftop cargo carrier is made of 100% waterproof military-grade PVC canvas and as long as the zipper is perfectly closed, your items will be protected from water.

6. Is there any way to prevent the rooftop cargo carrier, or its content, from being stolen?

Our Boacay rooftop cargo bag comes with a combination lock that you can use every time you travel for a better closure of the bag. However, it doesn't offer 100% security against a possible theft as the thief could cut the cargo bag or its straps. Considering that, we don't recommend you to leave the cargo bag with valuables in it unattended.

7. Can I load the rooftop cargo bag before I put it on the car's roof?

We DON'T recommend loading the rooftop cargo carrier before you put it on the car as you may get injured because of its weight and dimensions. Also, the cargo bag may get damaged as well.

8. The rubber seal of my car is glued. Can I put the hooks over it?

The hooks that come with our Boacay cargo bag are designed to fit the metal car frame, not the rubber seal. Considering that, we don't recommend to try putting them over the rubber seal.

9. Are the metal hooks protected against rusting?

Yes. The hooks that come with our Boacay cargo bag feature protection against rusting.

10. Do the straps loosen from the wind while traveling?

If the straps will loosen while traveling depends on certain factors, as the installation process and the weather conditions. To make sure that you're traveling safely, please check that the cargo bag is tight enough from time to time.



11. Can I run the straps inside the car instead of using the hooks if I don't have a roof rack?

No. We do not recommend you run the straps inside the car as the product wasn't designed for this type of installation. Moreover, if you run the straps through the inside of the car and it rains, water will leak inside.



Rooftop Cargo Carrier Size: 53*33*17.5" (135*84*45CM)

Product Weight: 5.3lb (2.4kg) **Package Weight:** 8.15lb (3.7 kg)

Material: 100% Waterproof Military-Grade

PVC Canvas

Cubic Feet: 15ft³

Model: BCY-CB

Function: Rooftop Cargo Carrier



To ensure that you don't invalidate the terms of the warranty, please read and understand this booklet. If a defect in materials, workmanship, or assembly is found BEFORE the product has been used, we will exchange the entire product, if the product is returned complete and in perfect condition in its original packaging.

This Boacay Rooftop Cargo Carrier comes with a full one-year warranty against any defect in manufacturing. The warranty does not cover damage caused by any accident, abuse, negligence, or misuse.

Boacay will remedy defects in materials or workmanship by repairing or replacing, at its option, a defective product without charge for parts or labor. Besides, Boacay may elect, at its option, not to repair or replace a defective product but rather issue to a purchaser a refund equal to the purchase price paid for the product.

Go to www.boacay.com/warranty-cb and fill out the form in order to register for your warranty!




For any inquiries or comments concerning our products, please contact us by email at support@boacay.com or by phone at (646) 450-4851.







- 😝 @boacay
- © @boacay
- @boacay
- @boacay
- support@boacay.com
- (646) 450-4851

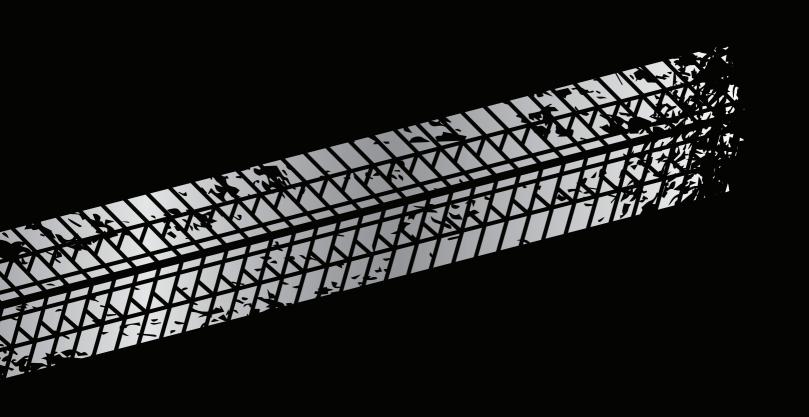



www.boacay.com