

ENIGMA PENDANT

Designed by Shoichi Uchiyama

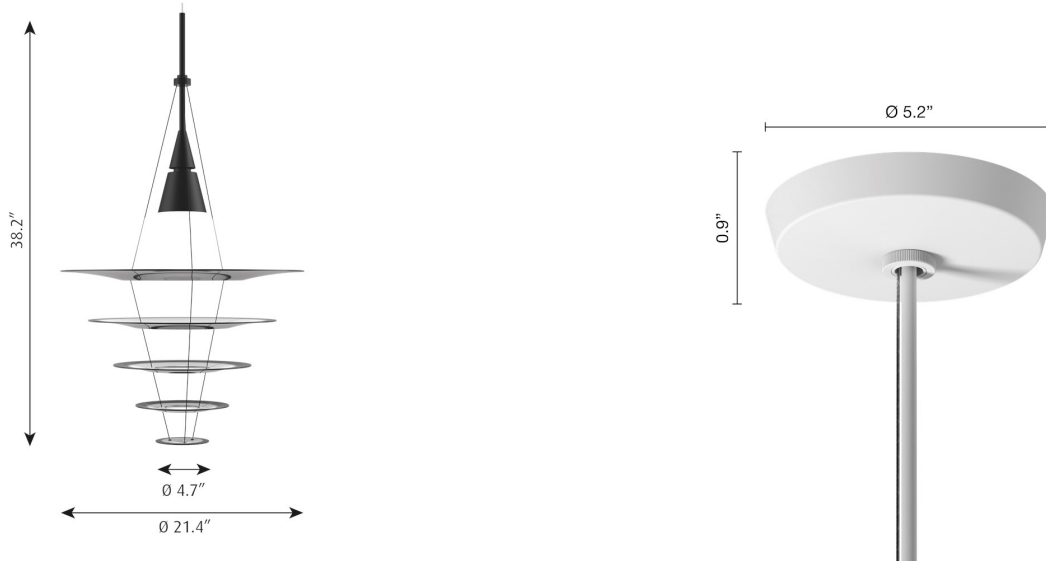

Technical specifications

Materials

Cone and pendant tube: Lacquered or wet painted aluminium.
Wire: Stainless steel.
Shades: Acrylic.

Finishes

Brushed aluminium coloured or black wet painted, aluminium.
Shades: White or black acrylic.

Mounting

Ø 825: 1 x stainless steel aircraft cable.
Canopy: White or black.
Cord type: 2 or 3-conductor, 18 AWG white or black PVC power cord.
Cord length: 12'. For mounting instructions, see download section on the product detail page.

Information

Electrical LED:
System Wattage: 62 W
LED Wattage: 57 W
Delivered lumens: 3,401 - 5,883
Efficacy: 54.9 lm/W - 94.9 lm/W

Electrical E-socket:
System Wattage: 8W
LED Wattage: 7 W
Delivered lumens: 341 - 487
Efficacy: 42.6 lm/W - 60.9 lm/W


Certifications:
cULus, Dry Location
Protection class IP20
Controllability: 0-10V Dimming or Phase dimming.
Color Rendering LED: Ra≥90
Color Rendering E-socket: Performance dependent upon screw-base lamp used. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

ENIGMA PENDANT


Designed by Shoichi Uchiyama

Light distribution diagrams


CARTESIAN

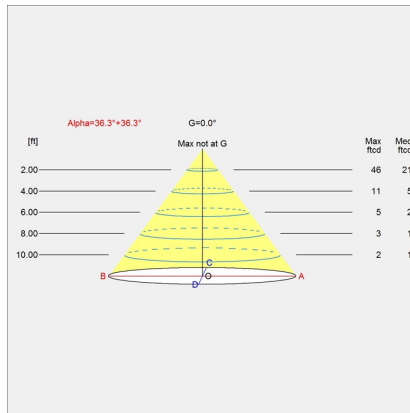

ISOLUX

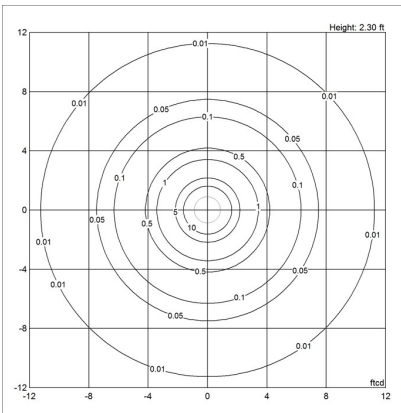

POLAR

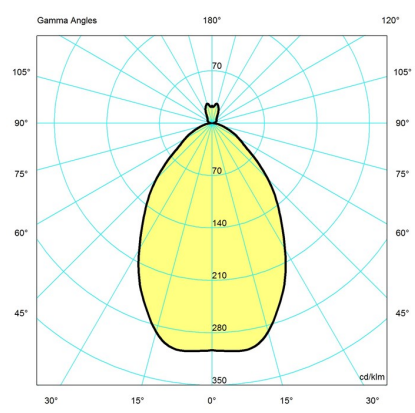

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
10000146254	1x8W 1/50W/PAR16 GU10 US	120V	424	-	White cord
10000146255	1x8W 1/50W/PAR16 GU10 US	120V	341	-	Black cord
10000146256	1x8W 1/50W/PAR16 GU10 US	120V	424	-	White cord
10000146257	1x8W 1/50W/PAR16 GU10 US	120V	332	-	Black cord
5741918715		120V		-	Black cord
5741918731		120V	332	-	Black cord
5741918757	LED 3000K 62W	120-277V/60HZ	3401	Dim 0-10v	Black cord
5741918760	LED 3000K 62W	120-277V/60HZ	3401	Dim 0-10v	White cord

ENIGMA PENDANT

Designed by Shoichi Uchiyama

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
10000146254	BLK, 728	16.6 / 29.3 / 16.6 IN / 2.5 LB
10000146255	BLK, 369	16.6 / 29.3 / 16.6 IN / 2.5 LB
10000146256	BLK, 728	21.4 / 38.2 / 21.4 IN / 4.7 LB
10000146257	BLK, 369	21.4 / 38.2 / 21.4 IN / 4.7 LB
5741918715	BLK, 369	16.6 / 29.3 / 16.6 IN / 3.0 LB
5741918731	BLK, 369	21.4 / 38.2 / 21.4 IN / 7.0 LB
5741918757	BLK, 369	32.5 / 61 / 32.5 IN / 23.5 LB
5741918760	BR ALU, 184	32.5 / 61 / 32.5 IN / 19.9 LB