


# VERSAMATE-300 Waste Rewinder Set-up

1. Place Rewinder into position, aligning slots in side frame with rods.
2. Rotate mounting blocks so that holes in mounting blocks align with holes in Rewinder side frame.
3. Insert screws through Rewinder side frame and into mounting blocks.
4. Tighten with provided Allen Key. To move side to side on machine, simply loosen thumb screws in mounting blocks, relocate and then re-tighten.



Viewed as Packaged

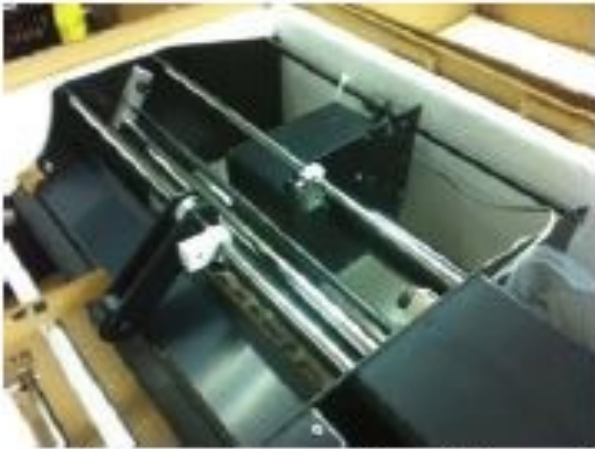

Cut Zip-tie, remove Roll Holder Rod



Remove Screws from Mounting Blocks



Locate and tighten