INSTRUCTIONS FOR USE



WINDING THE WATCH (CROWN POSITION 1)

THE CROWN IS SCREWABLE (CROWN POSITION 0). TO LOOSEN THE CROWN, TURN IT COUNTER CLOCKWISE (CROWN POSITION 1). THE MOVEMENT IS WOUND BY TURNING THE CROWN CLOCKWISE ABOUT 40 TIMES. THIS IS GENERALLY ENOUGH TO ENSURE

RELIABLE FUNCTIONALITY. SIMPLY WEARING THE WATCH EVERY DAY SHOULD SUFFICE TO KEEP THE SELF-WINDING MECHANISM WOUND. ONCE THE WATCH IS FULLY WOUND, YOU HAVE ABOUT 42 HOURS OF POWER RESERVE BEFORE YOU NEED TO WIND IT AGAIN.

DATE ADJUSTMENT (CROWN POSITION 2)

USE CROWN POSITION 2 TO ADJUST THE DATE. TURN THE CROWN TO CHANGE THE DATE.

PLEASE TAKE CARE TO FASTEN THE CROWN AFTER MAKING ADJUSTMENTS.

TIME ADJUSTMENT (CROWN POSITION 3)

IN CROWN POSITION 3, THE MOTION IS PAUSED. THIS HELPS YOU TO SET THE WATCH PRECISELY. WE RECOMMEND MOVING THE HANDS PAST THE DESIRED MINUTE MARKER AND THEN ADJUSTING IT BACKWARDS. THE MOVEMENT RESTARTS AS SOON AS THE CROWN IS NO LONGER IN POSITION 3.


PLEASE TAKE CARE TO FASTEN THE CROWN AFTER MAKING ADJUSTMENTS.

ADJUSTING THE BRACELET

USING THE TOOL THAT IS INCLUDED WITH YOUR WATCH, USE THE FLAT HEAD SIDE TO REMOVE THE ONE-SIDED SCREWS. REMOVE ENOUGH LINKS TO FIT YOUR WRIST AND STORE YOUR OTHER LINKS (SEE EXAMPLE 1).

YOU CAN ALSO MAKE A MANUAL MICRO ADJUSTMENT IN THE CLASP BY MOVING THE PIN UP AND DOWN THE BUCKLE TO GET THE RIGHT FIT (SEE EXAMPLE 2).

REMOVING THE BRACELET

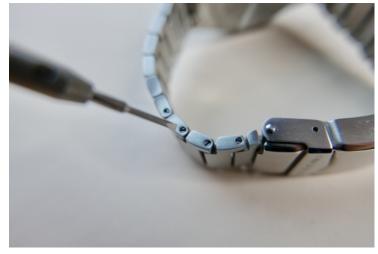

EXAMPLE 1



EXAMPLE 2



EXAMPLE 3

USING THE PIN SIDE OF THE TOOL, INSERT THE PIN END INTO THE LUG HOLE ON THE SIDE AND PUSH IN WHILE PULLING ON THE BRACELET TO COME OFF (SEE EXAMPLE 3).

NEED A NEW STRAP?

IF YOU WOULD LIKE TO PURCHASE A NEW STRAP FOR YOUR WATCH, YOU WILL NEED TO MAKE SURE THAT YOU BUY 20MM SIZED STRAPS.

ISSUES?

IF YOU HAVE ANY ISSUES WITH YOUR WATCH, PLEASE REACH OUT TO US AND WE WILL HELP TAKE CARE OF ANY PROBLEMS YOU MAY ENCOUNTER.

PLEASE REACH US AT: INFO@ASTORANDBANKS.COM

VISIT US AT: WWW.ASTORANDBANKS.COM