9to5 Signature Card 4.0

Grade: A






Crepe


Ruby



Lake

Charcoal

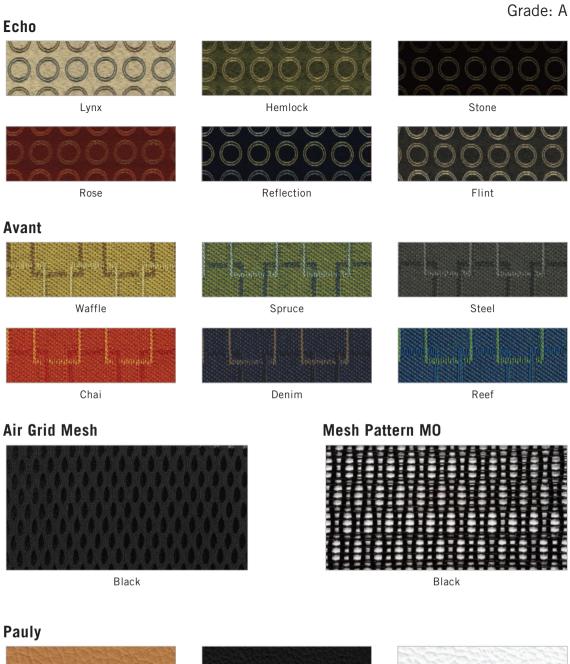

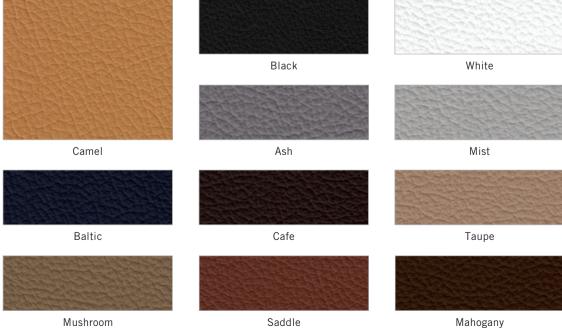

9to5 Seating's ExpressShip Fabric Program

Need it fast? We have you covered with a wide variety of upholstery options! Our ExpressShip program offers expedited shipment on our seating products, now including the Signature Card. Other ExpressShip fabric options include the 9to5 Breeze Collection and Vivid cards. Memo samples are available. Please contact the factory for larger swatches.

info

| Pattern | Content | Abrasion Resistance (Double Rubs) | Finish | Cleaning Code | Grade |
|---------------|--|---|-----------------|---------------|-------|
| Air Grid Mesh | 100% Polyester | 250,000 | Water Repellent | W | A/T01 |
| Mesh M0 | Polyester & Polyelastomer | 100,000 | Water Repellent | W | MO |
| Crepe | 100% Polyester | 250,000 | Water Repellent | W | А |
| Matrix | 100% Polyester | 100,000 | Water Repellent | W | А |
| Bingo | 100% Polyester | 100,000 | Water Repellent | W | А |
| Mosaic | 100% Polyester | 100,000 | Water Repellent | W | А |
| Tango | 100% Polyester | 100,000 | Water Repellent | W | А |
| Echo | 100% Polyester | 100,000 | Water Repellent | W | А |
| Avant | 100% Polyester | 100,000 | Water Repellent | W | А |
| Pauly | 100% Vinyl/PVC-Free Polyester Backing | 100,000 | Water Repellent | W, BC | А |









These patterns meet or exceed these ACT Performance standards for upholstery.

All patterns are FR free.

Icon Upholstery Definitions



Fire Retardancy

Flammable testing determines as fabric's resistance to burning. Passes Cal 117.



Colorfastness To Wet & Dry Crocking

The rubbing off of color from the fabric onto clothing, hands or other materials and can occur under wet or dry conditions. Passes AATCC 8-1974 Dry Crocking. Class 4 minimum, Wet Crocking. Class 3 minimum.



Colorfastness to Light

The degree to which fabric will retain its color when exposed to light. Passes AATCC 16A-1974 or AATCC 16E-1976. Class 4 minimum at 40 Hours. Note: Class 4 minimum at 60 hours is recommended for direct sunlight exposure.



Physical Properties

Brush Pill Test determines a fabric's pilling. Breaking/Tensile Strength Test determines the ability of a fabric to withstand tension without breaking or tearing. Seam Slippage Test determines the pulling apart of fabrics at the seams.

Passes Brush Pill ASTM D3511, 3-4 minimum. Breaking Strength ASTM D3597-D1682-64 (1975) 50 lbs. minimum in warp & weft, Seam Slippage ASTM D3597-D434-75 25 lbs. minimum in warp & weft.



Abrasion

The ability of a fabric to withstand damage from wear and rubbing. Passes Heavy Duty Contract ASTM 3597 modified (No. 10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM D4966 modified (with 21 oz. weight); 40,000 rubs Martindale Method.

Cleaning Codes

W: Water-based cleaning agents or foam may be used.

BC: Bleach Cleanable. Bleach cleanability is desirable for any fabric that may need to be disinfected or sterilized. Use a 10:1 water to bleach solution and rinse with water after cleaning.



PHONE 888.925.SEAT **FAX** 866.925.SEAT

EMAIL sales@9to5seating.com

9to5seating.com
Follow us @9to5seating

3211 Jack Northrop Ave.

Hawthorne, CA 90250



