

Solution 2

ARTICULATING ARM and
KEYBOARD PLATFORM

Model SOLUTION 2
Model SOLUTION 2CC

SOLUTION 2 Rev A 4/17

SOLUTION 2

SOLUTION 2CC




INSTALLATION AND USE

SOLUTION 2

PLEASE REVIEW these instructions before beginning the installation. Check that all parts needed were provided with your order. Contact your supplier if any parts are missing. Do not discard the packaging until satisfied that the product operates to your satisfaction.

Solution 2 combines the AA360 articulating arm with the PL003-25 keyboard platform. In this instruction booklet, installation of the two products will be explained in sequence, beginning with the AA360.

AA360 PARTS PROVIDED

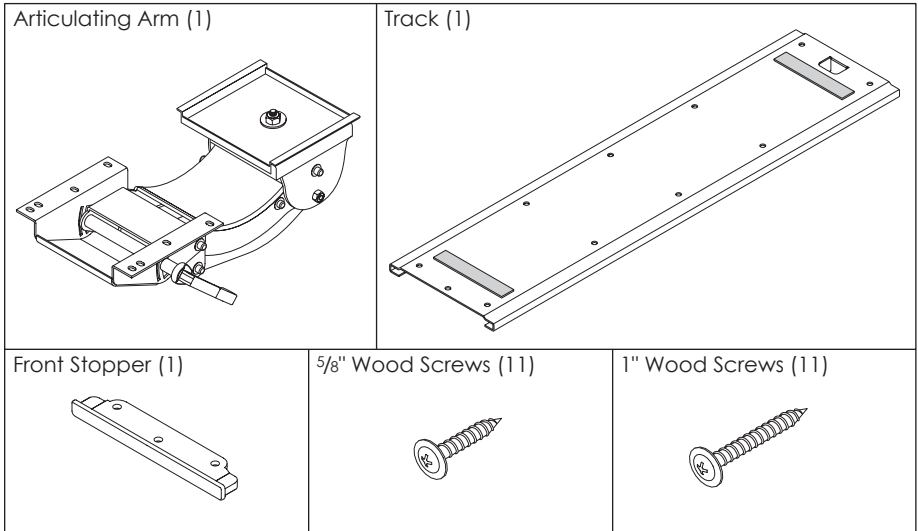


CAUTION: This install requires power tool. This is **not** a hand tool install.

ADDITIONAL TOOLS REQUIRED

- Drill (For Track Installation Only)
- $\frac{1}{8}$ " drill bit
- #2 Phillips drill bit

STEP 1: Adhere Track

- Peel the backing from the adhesive strips on top of the track.
- Adhere the track to the underside of the work surface.
 - Position the front edge of the track $\frac{1}{4}$ " from the front edge of the work surface.
 - The front of the track is the end with three holes.
- Press the track firmly in place.

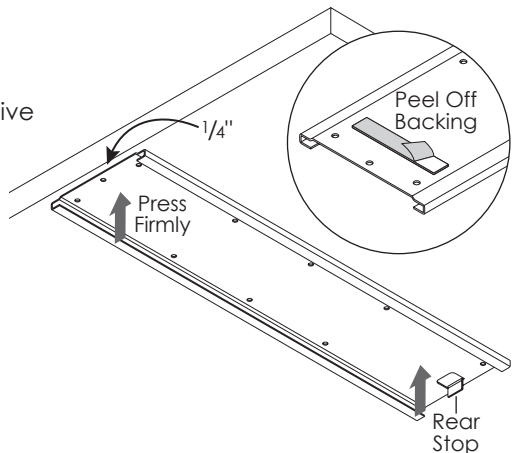


STEP 2: Attach Track


- Drill $\frac{1}{8}$ " pilot holes through all 11 holes in the track.
 - Drill the holes $\frac{5}{8}$ " deep or 1" deep, depending on which wood screws will be used. (A minimum work surface thickness of $1\frac{1}{2}$ " is recommended for the 1" screws.)

CAUTION: Be careful not to drill through the work surface.


- Attach the track with screws through the eight rear holes only, as shown.

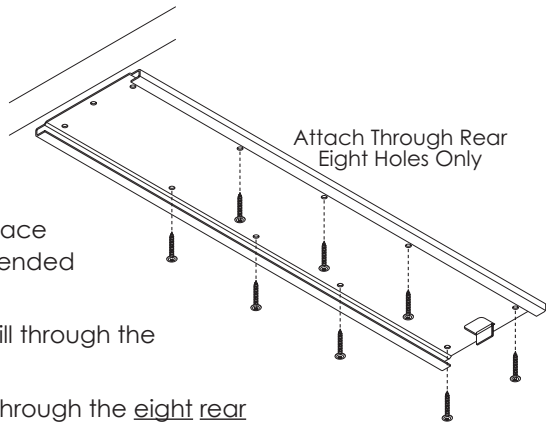**STEP 3: Install Articulating Arm**

- Slide the articulating arm onto the track. Position it back far enough so that you have access to the front three holes on the track.

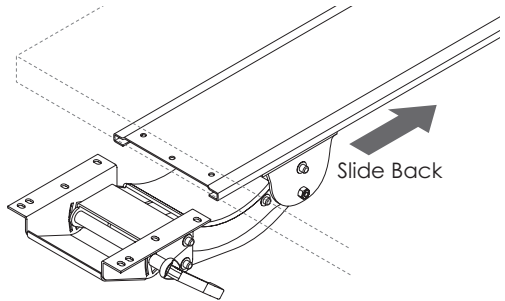**STEP 4: Attach Front Stop**

- Position the front stop onto the front of the track and secure it with the final three wood screws.


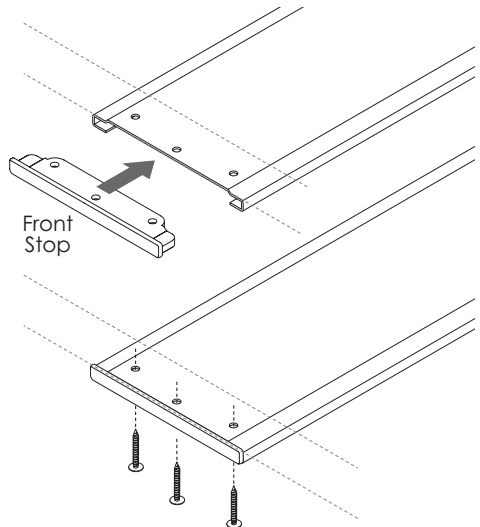






Begin keyboard installation with STEP 5 on page 4.

SOLUTION 2

The keyboard platform for Solution 1 is PL003-25 (rectangle) or PL003-25CC (cut corners). Although the appearance varies, installation procedures are identical.

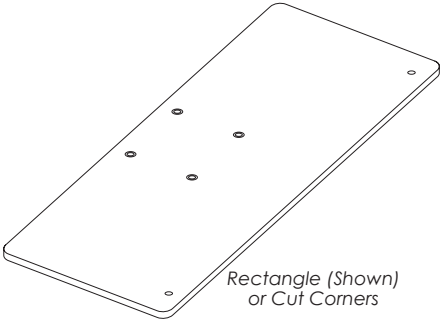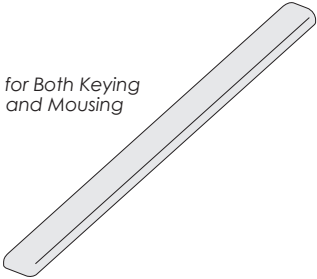PL003-25 PARTS PROVIDED

<p>Keyboard Platform (1)</p>  <p>Rectangle (Shown) or Cut Corners</p>	<p>Palm Rest (1 or 2)</p>  <p>1 for Both Keying and Mousing</p>		
<p>Flathead Screw (4)</p>  <p>#8-32x1/2</p>	<p>Flange Nut (4)</p>  <p>#8x32</p>	<p>Panhead Screw (2)</p>  <p>#8-32x5/8 (R-Series: #8-32x3/4)</p>	<p>Cord Clips (2)</p> 


CAUTION: Hand-tighten screws only. Do **not** use power tools.

TOOLS REQUIRED

- Phillips screwdriver

STEP 5: Attach Palm Rest(s)

- Attach the palm rest(s) to the keyboard platform. Use the #8-32x5/8 panhead screws (#8-32x3/4 with the R-Series) and a Phillips screwdriver. Two screw holes are located in the keyboard platform to accommodate a variety of installation possibilities.
 - With one palm rest, attach it with two screws through the two end holes.
 - With two separate palm rests, attach each with two screws, as shown.
 - The mouse and keyboard palm rests may be attached on either the left or right sides of the keyboard platform.

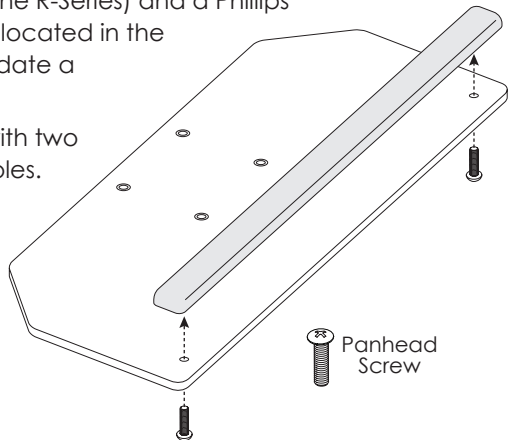


STEP 6: Attach Keyboard Platform

- Attach the keyboard platform to the keyboard arm and track assembly using the four flathead screws and flange nuts.

— Be sure the flange on the nuts is facing upward.

IMPORTANT: The flange nuts must be fully tightened to ensure the nuts are locked. Use a Phillips screwdriver.

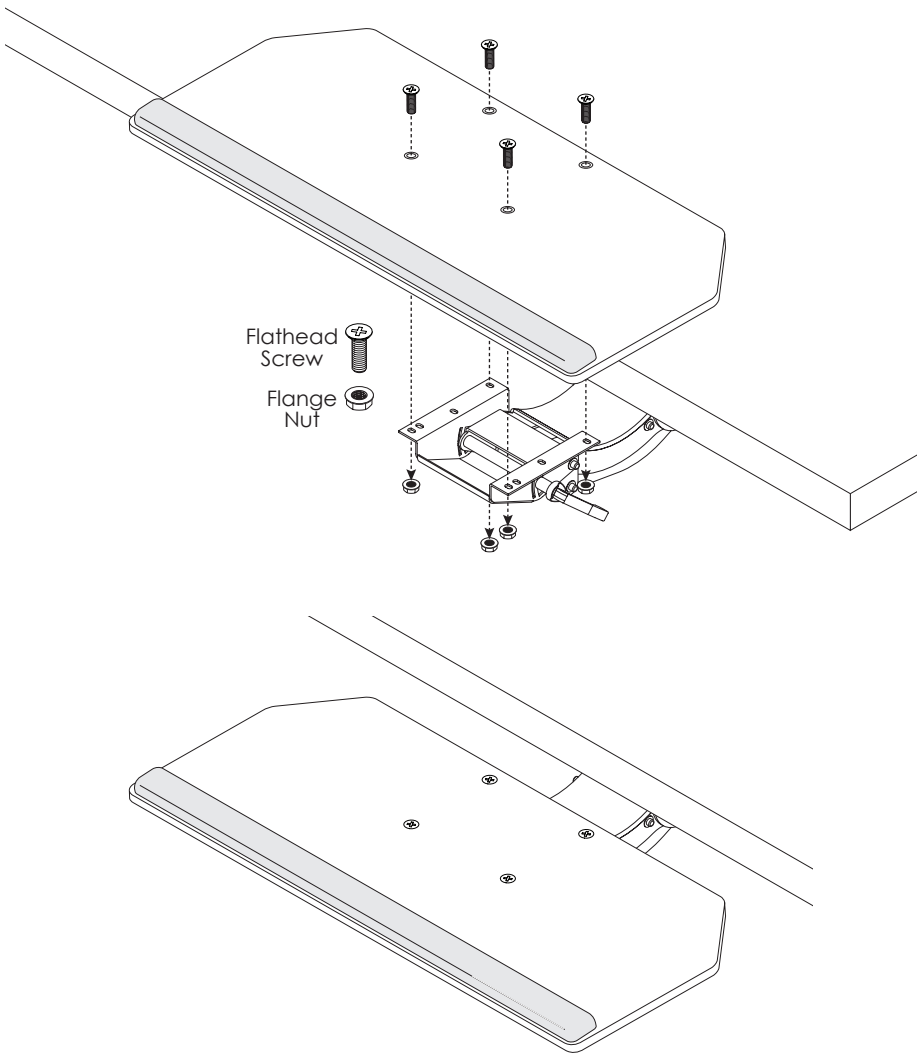

SOLUTION 2

STEP 7: Manage Cables

- Adhere cord clips to the underside of the keyboard platform as needed to organize the keyboard and mouse cables.


OPERATION

To Raise or Lower:

- Tip the platform up to unlock.
- Move the arm to the desired height.
- Release the platform to lock it in place.

To Set Tilt Angle:

- Unlock the quick release handle on the right side of the arm.
- Adjust the tilt angle to the desired position.
- Lock the quick release knob.

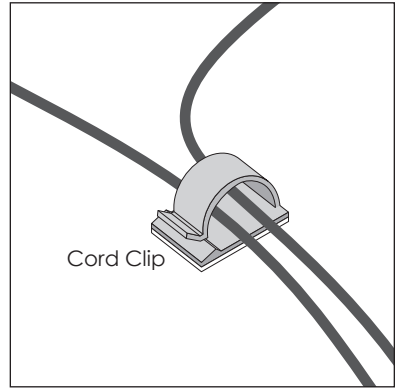

800.833.3746 | esiergo.com