


Lemondrop




Candy Corn

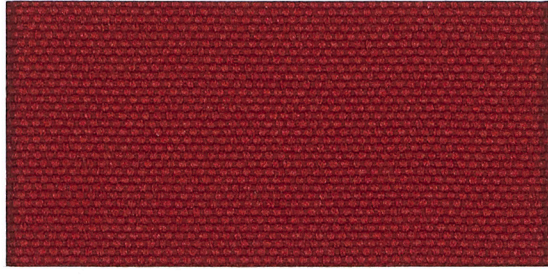


Cherrybomb





Cola

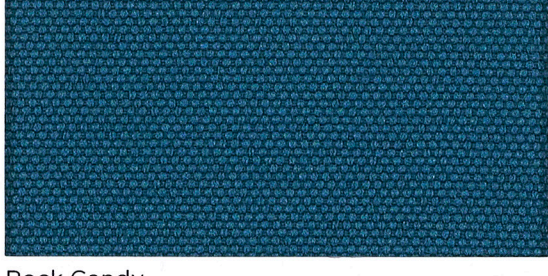

Rock Candy

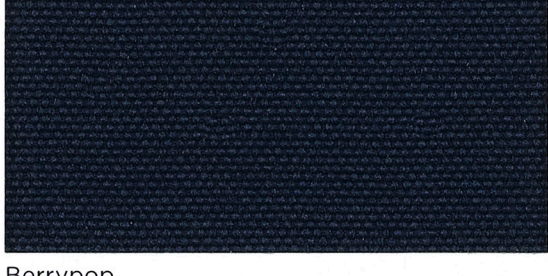

Berrypop

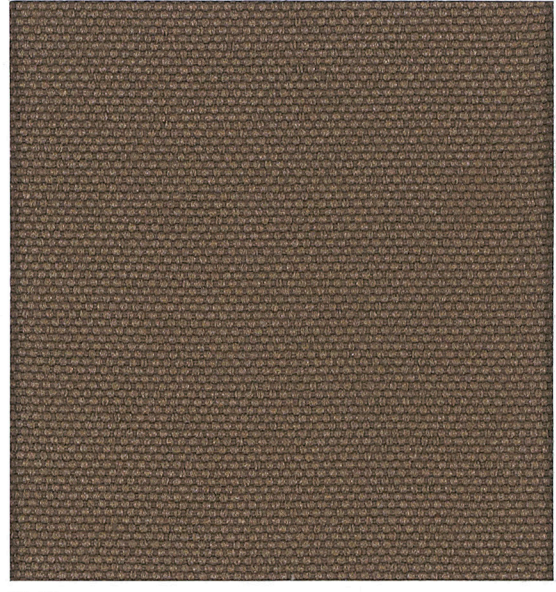


Toffee



Chocolate



Kiss

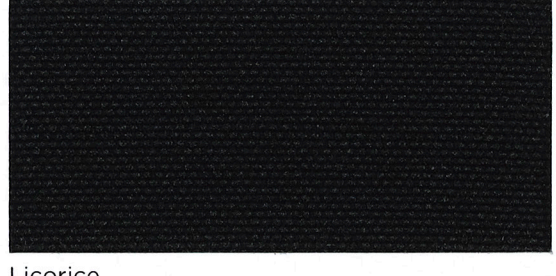

Licorice

Pattern: Sugar

100% Polyester

High Abrasion:
120,000 double rubs

TB 133 approved (133)



Pattern	Sugar
Grade	1 (SOI) or A (IDEON)
Content	100% Polyester
Width	54"
Finish	Water Repellent, Latex Backing
High Abrasion	120,000 Double Rubs
Flammability	TB 133 approved (133)
Repeat	None
Applicable ACT®	☹ ☹ ☹ ☹ ☹
Cleaning Code	W: Water based cleaning agents or foam may be used.
Samples	To order samples, call 1-888-274-8664 or visit www.sitonit.net , www.ideondesign.com

icon upholstery definitions



Fire Retardancy

Flammability testing determines a fabric's resistance to burning. Passes Cal 117.



Colorfastness to Wet and Dry Crocking

The rubbing off of color from fabric onto clothing, hands or other materials and can occur under wet or dry conditions. Passes AATCC 8-1974 Dry Crocking. Class 4 minimum, Wet Crocking. Class 3 minimum.



Colorfastness to Light

The degree to which fabric will retain its color when exposed to light. Passes AATCC 16A-1974 or AATCC 16E-1976. Class 4 minimum at 40 hours. Note: Class 4 minimum at 60 hours is recommended for direct sunlight exposure.



Physical Properties

Brush Pilling Test to determine a fabric's pilling. Breaking/Tensile Strength Test determines the ability of a fabric to withstand tension without breaking or tearing. Seam Slippage Test determines the pulling apart of fabrics at the seams. Passes Brush Pilling ASTM D3511, 3-4 minimum, Breaking Strength ASTM D3597-D1682-64 (1975) 50 lbs. minimum in warp & weft, Seam Slippage ASTM D3597-D434-75 25 lbs. minimum in warp & weft.



Abrasion

The ability of a fabric to withstand damage from wear and rubbing. Passes Heavy Duty Contract ASTM 3597 modified (No.10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM 4966 modified (with 21 oz. wt.); 40,000 rubs Martindale Method.



Cal 133

These fabrics can be used in combination with other designated SitOnIt and IDEON components to meet the California Technical Bulletin 133 standard for furniture flammability.

SitOnIt • Seating™



888.274.8664

714.995.4855 Fax

www.sitonit.net

sales@sitonit.net

www.IDEONDesign.com

sales@ideondesign.com

Showroom Locations

Los Angeles

6415 Katella Avenue
Cypress, CA 90630

Chicago

222 Merchandise Mart Plaza
Suite 1150
Chicago, IL 60654

New York City

11 East 26th
New York, NY 10010

