

TECHNICAL SPECIFICATIONS




6 in | P/N 133-0012-UN | BOX OF 12
 5 in | P/N 133-0013-UN | BOX OF 12

PAD SIZES



RECOMMENDED BACKING PLATES

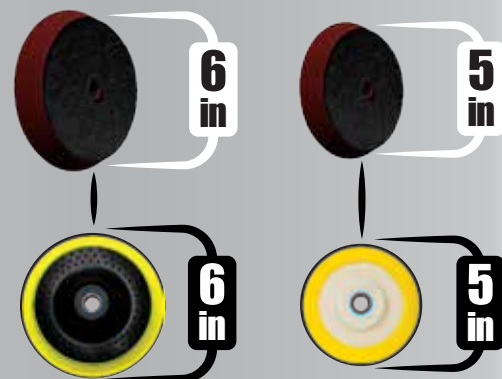

PAD EURO FOAM XP POLISHING CUTTING

REFERENCE	PRODUCT DESCRIPTION	UN/BOX	ANCHOR TYPE
133-0013 UN	Pad Euro Foam XP Polishing Cutting 5 Inches	12	VELCRO
133-0012 UN	Pad Euro Foam XP Polishing Cutting 6 Inches	12	VELCRO

DESCRIPTION

The **Pad Euro Foam XP Cutting** has an unique design for scratch removal, leveling and providing a good gloss on all paint surfaces. When is use with any of our Symplex® Polishes and Compounds will leave a Mirror-Like finish with non or minimal swirl marks. It can be used with high speed rotary buffing machines as well as long throw orbitals (+21 mm). European high-density foam offers a quick and effective removal of colorsanding scratches as well as excellent gloss. The Euro Foam XP Cutting Pad is compatible with all types of paint and clear coats, Polyester, Polyurethanes, Enamels, Lacquers, etc.

FEATURES

- High Density European Foam.
- Tear and wear resistance.
- Excellent cutting power, leveling and gloss.
- Ideal to be used in long throw Roto-Orbital machines Outstanding Distinction of Image (D.O.I.)

- Easy to clean.
- High performance and durability.
- Very good temperature management, thanks to its semi-open cell construction.

APPLICATIONS

For its excellent cutting power and gloss can be used to buff any surface with color sanding processes higher than grit 3000 gr. Or in leveling processes subsequent to the use of any of our wool cutting pads.

INSTRUCTIONS

- The speed rotation should not exceed 2800 rpm.
- Can be used in Roto-Orbital or High Speed Rotary machines.
- Place the pad on the paint as flat as possible. Excessive tilt will generate more heat and increases the possibility of swirl marks and holograms.
- The Pad Euro Foam XP can be washed with water, this will increase the performance and durability of the Pad.
- When used with any of our "Real One Step Compound" products or Symplex® Restorers, apply enough pressure at the beginning of the process to allow the abrasives to break down on the surface

efficiently, then reduce the pressure to obtain leveling and ultra-gloss.

TIPS: The Pad rotation should be monitored when the edges and curves are polished.

Place the Pad as flat as possible, this will reduce dramatically the Holograms.

PRECAUTIONS

- Keep away from sources of ignition
- Use Safety goggles
- Wear hearing protection

WARRANTY AND LIMITATION OF RESOURCES

Technical Information: The technical information, recommendations, and other statements contained in this document are based upon tests or experience that Symplex® considered reliable, but the accuracy of such information oexhaustividad is not guaranteed.

Product Use: Many factors beyond the control of Symplex® and only the user's knowledge and control can affect the use and performance of a product in a particular application Symplex®. Given the variety of factors that can affect the use and performance of a product, the user is solely responsible for evaluating the Symplex® product and determine whether it is fit for a particular purpose and suitable for the method of application.