



TECHNICAL SPECIFICATIONS

MARINE PRO ULTRA BOAT COMPOUND

REFERENCE: 170-0001

	Sizes:			
	Gallons	Quarts	Pints	8 oz
	3.748 ml.	948 ml.	473 ml.	236 ml.

DESCRIPTION

Symplex® Ultra Boat Compound, Cut, Leveling & Finishing Gloss with outstanding distinction of image (DOI) Latest abrasive technology provides fast and effective elimination of grit scratches and oxidation. No white residue. Very low dust. can be use on Fiberglass, Gel-Coat and any painted boat surface.

**IDEAL FOR DARK COLORS SURFACES
HYPER CUT AND GLOSS
NO SILICONE / NO FILLERS
LOW DUST - WATER BASED
DOES NOT LEAVE ANY WHITE RESIDUE**

The Symplex® Ultra Boat Compound Removes heavy oxidation safely from fiberglass and painted surfaces. Restore original shine to faded gelcoats. Safe on fresh cured paints and gelcoats. will not leave any swirl marks.

PHYSICAL PROPERTIES

- White Color
- Liquid (Viscous)
- Odor characteristic
- VOC compliant Formula
- Containers with metered plastic lids.
- Product life: 1 year.

APPLICATION TECHNIQUES

SHAKE WELL BEFORE USING

To be use with polish machine:

- Apply product evenly to a 2 sq. ft. area. Begin buffing with a

speed between 1500 - 2000 rpm. apply enough pressure in this first application, easing up gradually as gloss is achieved. Try to get the finish in one or two applications.

- Verify that you have removed all the imperfections or sandpaper scratches, if necessary reapply the product.

To be use by hand:

- Apply evenly with soft towel. apply enough pressure to remove all the imperfection, wipe off with a Microfiber or Terry cloth.

CONTAINERS

8 oz containers. 16 oz. 32 oz. They are made of high strength PET . 128 oz container. (MPG) is produced in high density polyethylene (HDPE) It also provides a metering plastic cap in order to facilitate the closure of the container, preventing contamination, drying of the product, permit reopening, accurate and simple dosing.

BUFFING & FINISHING PAD

We highly recommend the use of our Symplex® Turbo Extreme 100% wool pads single sided or double sided, Piranha (P/N 134-0003-UN) or Flex (P/N 134-0004-UN). For additional Ultra gloss change to Symplex® Turbo Foam Pad P/N 133-0007-UN. Euro Foam XG 5" P/N 133-0015-UN and Euro Foam XG 5" P/N 133-0014-UN

HANDLING AND STORAGE

See the Safety Data Sheet (MSDS)


PREVENTIVE INFORMATION

See product label and Material Safety Data Sheet for health and safety information before using this product.

WARRANTY AND LIMITATION OF RESOURCES

Technical Information: The technical information, recommendations, and other statements contained in this document are based upon tests or experience that Symplex® considered reliable, but the accuracy of such information or exhaustive is not guaranteed.

HOW TO USE / MODO DE USO

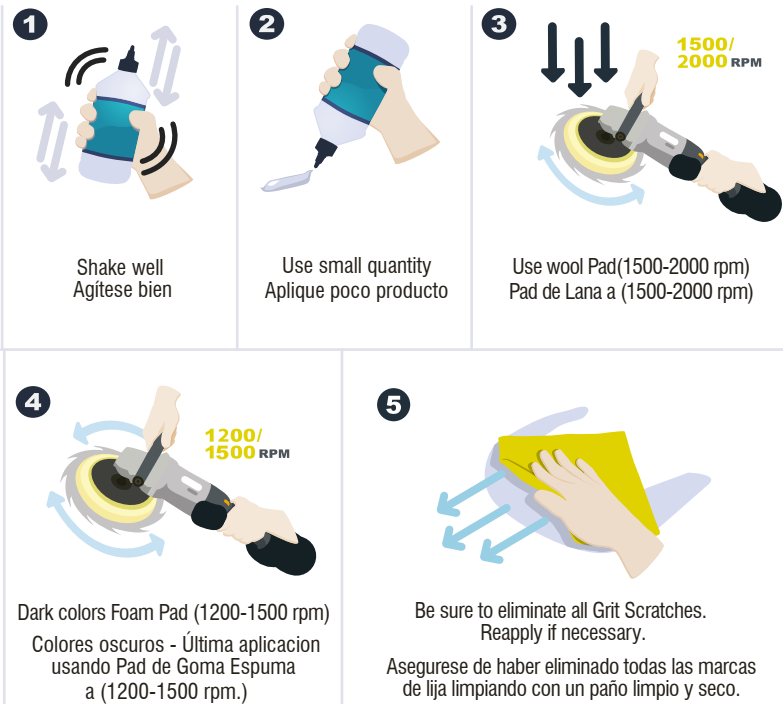

1. Shake well / Agítese bien
2. Use small quantity / Aplique poco producto
3. Use wool Pad (1500-2000 rpm) / Pad de Lana a (1500-2000 rpm)
4. Dark colors Foam Pad (1200-1500 rpm) / Colores oscuros - Última aplicación usando Pad de Goma Espuma a (1200-1500 rpm.)
5. Be sure to eliminate all Grit Scratches. Reapply if necessary. / Asegurese de haber eliminado todas las marcas de lija limpiando con un paño limpio y seco. De ser necesario reaplique.



www.symplex.us