




# RIM DIMENSIONS

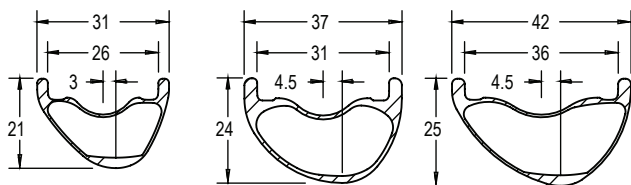

MODEL	ARC CARBON 26	ARC CARBON 31	ARC CARBON 36
HOLE COUNT	28/32	28/32	28/32
TUBELESS	YES	YES	YES
MAX TENSION	1200 N / 122 KgF	1200 N / 122 KgF	1200 N / 122 KgF
USE	XC / TRAIL	TRAIL / AM / ENDURO	TRAIL / AM / ENDURO
ETRTO	622X25c	584x30c / 622x30c	584x35c / 622x35c
WEIGHT (G)	400 +/-5%	445 +/-5% / 495 +/-5%	460 +/-5% / 510 +/-5%
OFFSET	3	4.5	4.5
ERD*	600	554 / 592	554 / 592

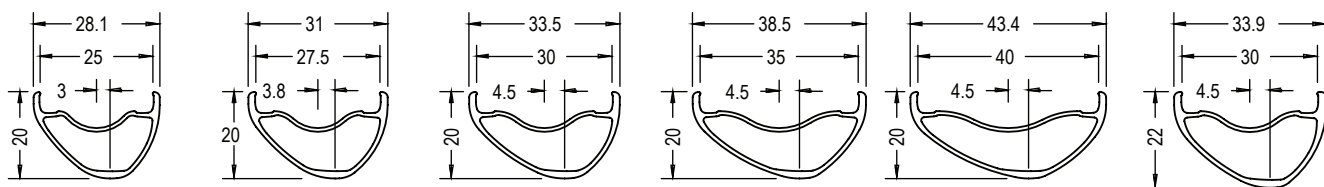

MODEL	ARC OFFSET 25	ARC OFFSET 27	ARC OFFSET 30	ARC OFFSET 35	ARC OFFSET 40	ARC HEAVY DUTY 30
HOLE COUNT	28/32	28/32	28/32	28/32	28/32	32
TUBELESS	YES	YES	YES	YES	YES	YES
MAX TENSION	1200 N / 122 KgF	1200 N / 122 KgF	1200 N / 122 KgF	1200 N / 122 KgF	1200 N / 122 KgF	1200 N / 122 KgF
USE	XC / TRAIL	TRAIL / AM	TRAIL / AM / ENDURO	TRAIL / AM / ENDURO	TRAIL / AM	AM / ENDURO / DH
ETRTO	584x25c / 622x25c	584x27c / 622x27c	584x30c / 622x30c	584x35c / 622x35c	584x40c / 622x40c	584x30c / 622x30c
WEIGHT	428 +/-5% / 450 +/-5%	470 +/-5% / 500 +/-5%	494 +/-5% / 525 +/-5%	530 +/-5% / 563 +/-5%	570 +/-5% / 606 +/-5%	565 +/-5% / 601 +/-5%
OFFSET	3	3.8	4.5	4.5	4.5	4.5
ERD*	562 / 600	562 / 600	562 / 600	562 / 600	562 / 600	558 / 596

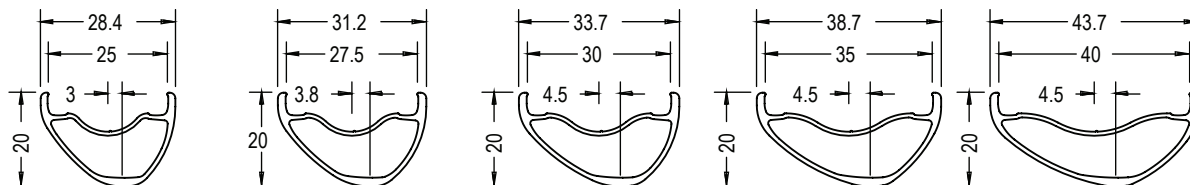

MODEL	AR OFFSET 25	AR OFFSET 27	AR OFFSET 30	AR OFFSET 35	AR OFFSET 40
HOLE COUNT	32	32	32	32	32
TUBELESS	YES	YES	YES	YES	YES
MAX TENSION	1200 N / 122 KgF	1200 N / 122 KgF	1200 N / 122 KgF	1200 N / 122 KgF	1200 N / 122 KgF
USE	XC / TRAIL	TRAIL / AM	TRAIL / AM / ENDURO	TRAIL / AM / ENDURO	TRAIL / AM
ETRTO	584x25c / 622x25c	584x27c / 622x27c	584x30c / 622x30c	584x35c / 622x35c	584x40c / 622x40c
WEIGHT	448 +/-5% / 470 +/-5%	490 +/-5% / 520 +/-5%	514 +/-5% / 545 +/-5%	552 +/-5% / 583 +/-5%	595 +/-5% / 626 +/-5%
OFFSET	3	3.8	4.5	4.5	4.5
ERD*	562 / 600	562 / 600	562 / 600	562 / 600	562 / 600

\*ASSUMING 2MM NIPPLE HEAD