


# 2500 SERIES


## HEAVY DUTY ROLL-UP




### INTERIOR ELEVATION

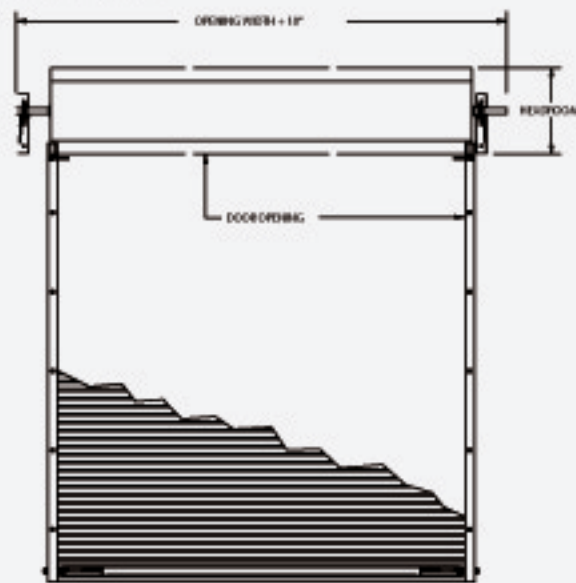

### GUIDE DETAIL

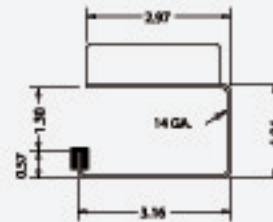

### DOOR ENGAGEMENT

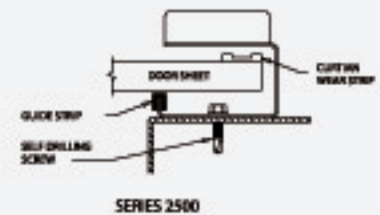

### GUIDE MOUNTING



MASONRY MOUNT



STEEL MOUNT



WOOD MOUNT

### CURTAIN

- 26-gauge galvanized, Grade E hard steel
- 5/8" ribbed corrugation
- Maximum opening size 18' x 18'
- Siliconized polyester WeatherXL® paint over prime coat

### BOTTOM BAR

- 6063 - T6 aluminum extrusion
- 2" x 1 1/2" galvanized angles
- Bulb astragal
- Stainless steel nuts and bolts

### AXLE-DRUM ASSEMBLY

- 1 5/16" D.D. steel axle, 14-gauge
- 11-gauge axle on doors over 10' wide
- Utilizes 12", 16-gauge drums
- Shielded steel ball bearings in drums
- Oil tempered torsion springs

### A.C.E. (ADVANCED CURTAIN ENGAGEMENT) GUIDE SYSTEM


- 14-gauge galvanized steel
- Adjustable bolt on head stop
- Polyethylene wear strip
- Pre-punched holes for lock and attachment fasteners

### HARDWARE

- Saddle clamps with set fasteners
- 10-gauge slide locks, two per door
- 16-gauge step plate; two per door
- 1/2" steel angle T-bracket
- Aluminum "T" shaped lead stop

### OPTIONS

- Chain hoist 4:1 reduction
- Vision panels (17" x 5")
- Hood
- Steel mounting plates
- Motor operated
- Available in 24 colors, subject to availability and varying lead times

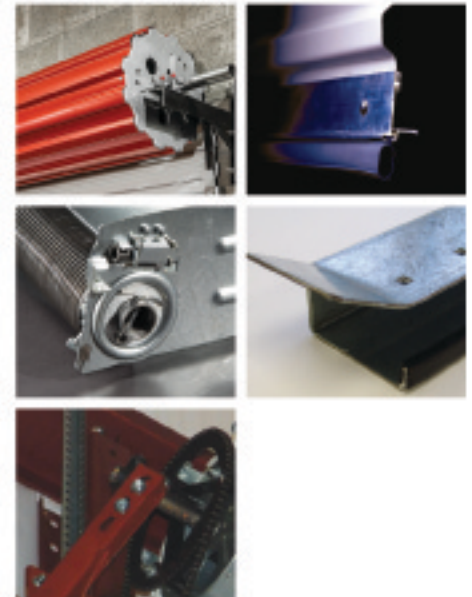

The 2500 Series is wind rated up to 12' wide.  
The pressure rating increases as the door width decreases.

