


# 5000 SERIES


## HEAVY DUTY ROLL-UP



### INTERIOR ELEVATION

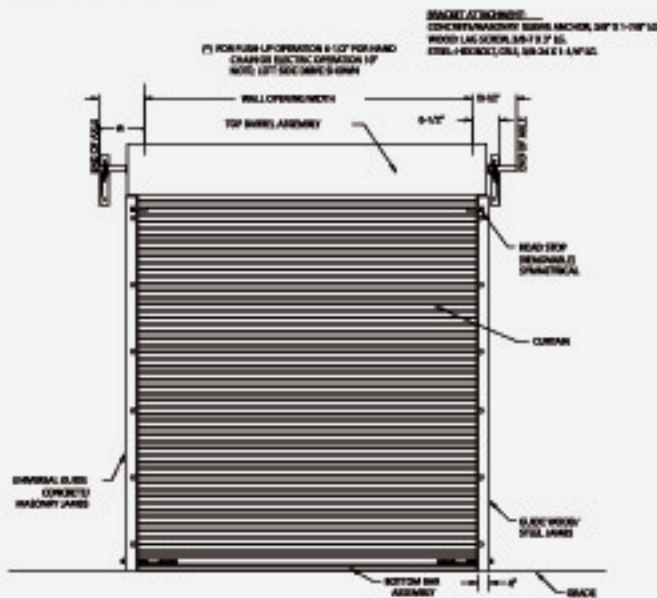

CONCRETE/FILLED BLOCK JAMBS LH GUIDE MOUNT SHOWN

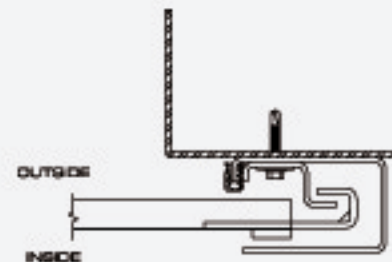

STEEL JAMBS RH GUIDE MOUNT SHOWN

### CURTAIN

- 26-gauge galvanized, Grade E hard steel
- 5/8" ribbed corrugation with three-rivet windlock attachment
- Maximum opening size 18' x 16'
- Siliconized polyester WeatherXL™ paint over prime coat

### BOTTOM BAR

- 6063-T6 aluminum extrusion
- 2" x 1 1/2" galvanized angles
- Bulb astragal
- Stainless steel nuts and bolts

### AXLE-DRUM ASSEMBLY

- 1 5/16" O.D. steel axle, 14-gauge
- 11-gauge axle on doors over 10' wide
- Utilizes 12", 16-gauge drums
- Shielded steel ball bearings in drums
- Oil tempered torsion springs

### A.C.E. (ADVANCED CURTAIN ENGAGEMENT) GUIDE SYSTEM


- 12-gauge galvanized steel
- 12-gauge wind lock bar
- Adjustable bolt on head stop
- Polyethylene wear strip
- Pre-punched holes for lock and attachment fasteners

### HARDWARE

- Saddle clamps with set fasteners
- 10-gauge slide locks, two per door
- 16-gauge step plate, two per door
- 1/2" steel angle T-bracket

### OPTIONS

- Chain hoist 8:1 reduction
- Header seal
- Hood
- Steel mounting plates
- Motor operated
- Available in 24 colors, subject to availability and varying lead times

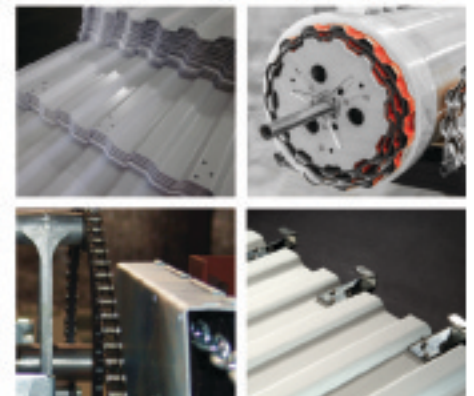

The 5000 Series is wind rated up to 16' wide.  
The pressure rating increases as the door width decreases.

