


STEP 2 Assembling the Block

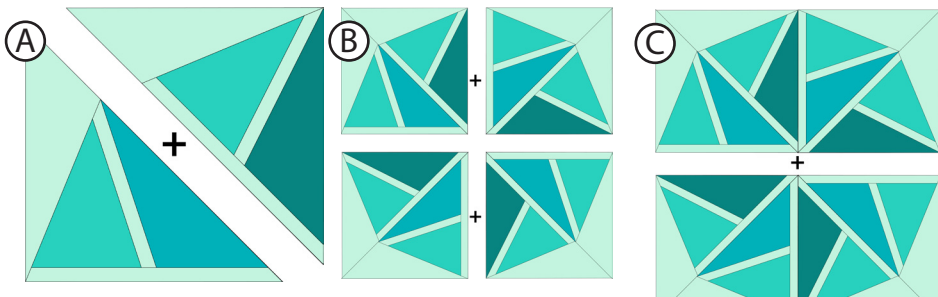

(A) Place one **Template B Piece** and one **Template A Piece** right sides together (as shown), then sew. Repeat this for remaining three sets of A/B templates.

(B) Lay your four square blocks out as shown. Sew the blocks in rows together.

(C) Sew each row together. Your block should measure 15" unfinished.

You can save the block to sew together with other Pile O' Fabric Club quilt blocks or make more of them into a quilt, bag, pillow sham, and more!



NOTE

If you plan to use the block with the other blocks from the club, then you will want to add sashing around the block. From Pond (Color 4) cut (2) 2.25" x 15" pieces for the sides of the block and (2) 2.25" x 18" pieces for the top and bottom. Sew the side pieces on to the block first, then add the top and bottom pieces. The block should finish at 18" x 18" (*finished size*).



ABOUT THE DESIGNER ALYSSA LICHNER


Alyssa Lichner is a graphic designer turned avid sewist. She writes modern sewing tutorials and shares techniques and inspiration on her blog, Pile O' Fabric. Pile O' Fabric is also an online fabric, supply, and pattern shop for the modern sewist.

 **PILEOFFABRIC.COM**

SHATTERED

QUILT BLOCK PATTERN
BY ALYSSA LICHNER

KONA[®]
FABRIC CLUB
MONTHLY MONOCHROMATIC'S

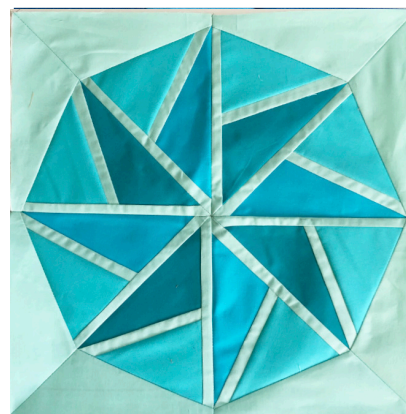

Share Your Block!

Share your finished Shattered quilt block using hash tags #pileoffabricclub or #shatteredblock and tag us at @pileoffabric.

Pile O' Fabric
 MODERN SEWING PATTERNS

Supply/Fabric Requirements

- ☐ Add-A-Quarter Ruler
- ☐ Washable Glue Stick
- ☐ Rectangle piece of Template Plastic
- ☐ Seam Roller or Iron for Pressing
- ☐ 1/8 yard of Kona Cotton in Jade Green, Breakers, Pool, and Pond

Cutting the Fabric

Cut the following pieces from your fabric:

FROM JADE GREEN (COLOR 1)

- ☐ (4) 3" x 8.25" - Piece 1

FROM BREAKERS (COLOR 2)

- ☐ (4) 3" x 8.25" - Piece 1

FROM POOL (COLOR 3)

- ☐ (8) 3.5" x 5.25" - Piece 3

FROM POND (COLOR 4)

- ☐ (8) 1" x 6.5" - Piece 2
- ☐ (8) 1" x 8" - Piece 4
- ☐ (8) 3.5" x 7.75" - Piece 5

Optional Sashing

- ☐ (2) 2" x 15" - Sashing L&R

Preparation

UNDERSTANDING THE PATTERN

This quilt block pattern includes instructions to create one 14.5" x 14.5" or 18" x 18" (*finished size*) **Shattered Quilt Block** using foundation paper piecing. All seam allowances are 1/4" unless otherwise specified and instructions for pressing will be mentioned in the steps.

PREPARING YOUR FABRIC

We strongly suggest starching and pressing your fabric with a hot iron before cutting.


DOWNLOAD TEMPLATES & PDF

To download the block templates and PDF version of this pattern, log into to your Pile O' Fabric account and go to:
pileoffabric.com/blogs/kona-cotton-club

PRINTING THE TEMPLATES

Print the pattern templates at 100% or Actual Size (*do not scale or choose Fit to Page*). After printing, measure the 1" guide box to be sure the templates are printed at the correct size.


STEP 1 Foundation Paper Piece Templates A & B

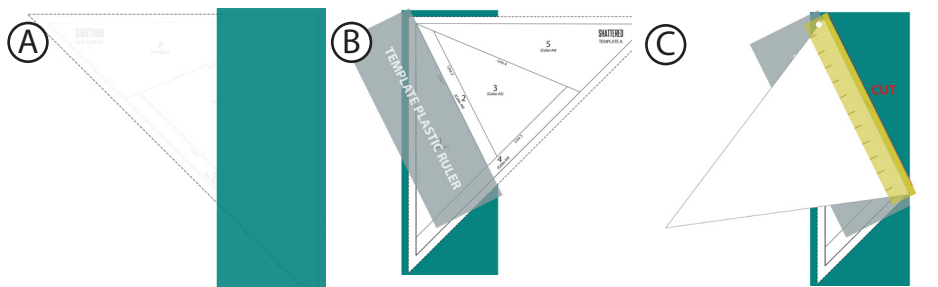

(A) Turn **Block A template** over so the wrong side (blank side) is facing up. With the fabric right side up, use a glue stick to glue an **Piece 1** on top of **area 1**, completely covering **area 1** with the fabric.

(B) Turn the template and fabric over so that the printed side of the template is facing up. Place the template-plastic ruler along **Line 1** between **areas 1** and **2**.


(C) Fold back the template along the template-plastic ruler to expose the seam allowance. Place the *Add-A-Quarter* ruler on the fold and use a rotary cutter to trim the excess fabric.

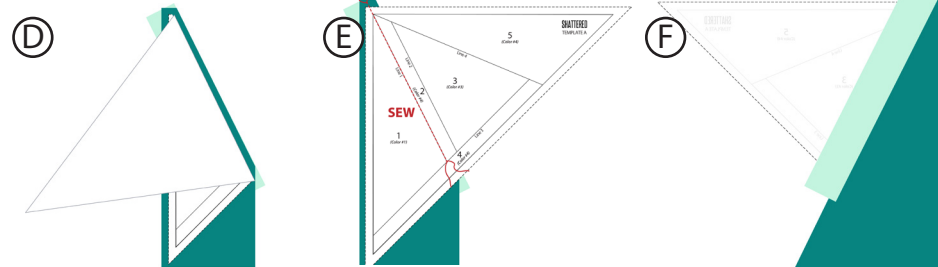

(D) Place **Piece 2** right sides together with the raw edge of **Piece 1**. Make sure you position the **Piece 2** so it will cover all of **area 2**.


(E) With the template printed side up, sew along **Line 1** between **areas 1** and **2**. Backstitch when starting and stopping.

(F) Open the **A2 piece** so that it is right side up and press the seam allowance with a seam roller.

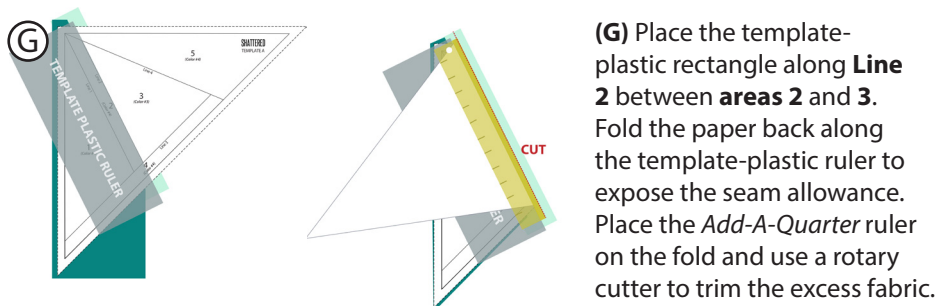


(G) Place the template-plastic rectangle along **Line 2** between **areas 2** and **3**. Fold the paper back along the template-plastic ruler to expose the seam allowance. Place the *Add-A-Quarter* ruler on the fold and use a rotary cutter to trim the excess fabric.

STEP 1 Cont. FPP Templates A & B

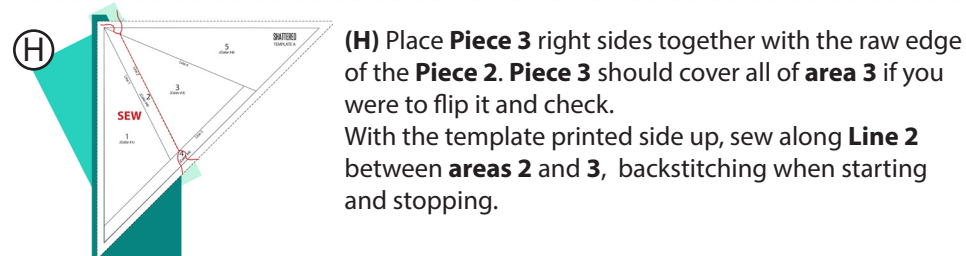


(H) Place **Piece 3** right sides together with the raw edge of the **Piece 2**. **Piece 3** should cover all of **area 3** if you were to flip it and check. With the template printed side up, sew along **Line 2** between **areas 2** and **3**, backstitching when starting and stopping.

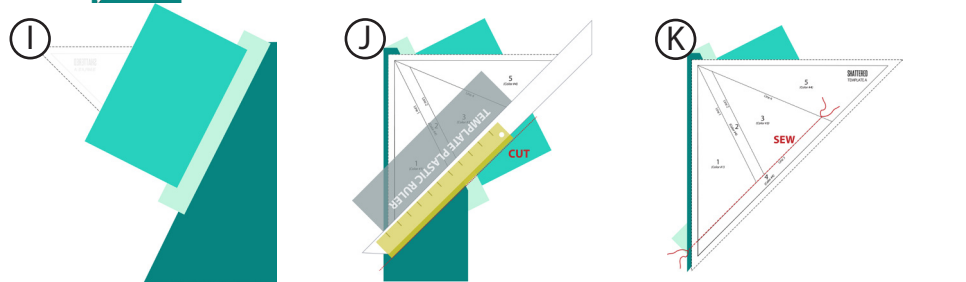

(I) Open **Piece 3** so that it is right side up and press the seam allowance with a seam roller.

(J) Place the template-plastic ruler along **Line 3** below **areas 1, 2, and 3**. Fold the paper back along the template-plastic ruler to expose the seam allowance. Place the *Add-A-Quarter* ruler on the fold and use a rotary cutter to trim the excess fabric.

(K) Place **Piece 4** right sides together with the raw edge of the **Piece 1, 2, and 3**. With the template printed side up, sew along **Line 3** below **areas 1, 2, and 3**, backstitching when starting and stopping. Open **Piece 4** so that it is right side up and press the seam allowance with a seam roller.

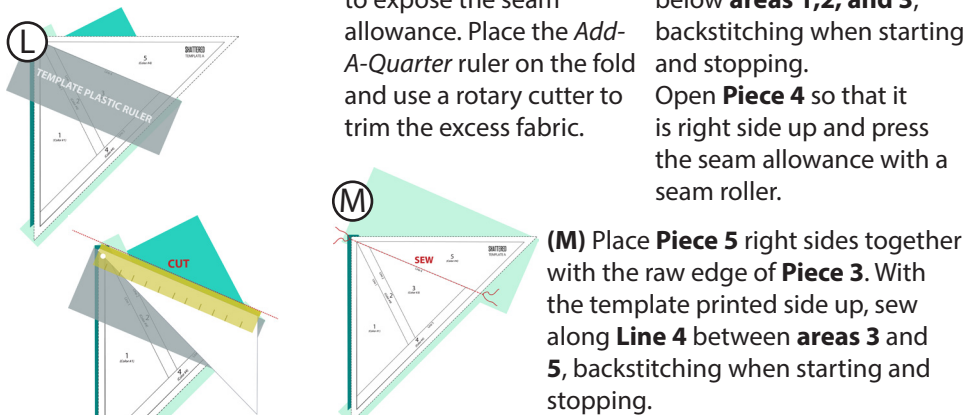

(L) Place the template-plastic ruler along **Line 4** between **areas 3** and **5**. Fold the paper back and trim the excess fabric.

(M) Place **Piece 5** right sides together with the raw edge of **Piece 3**. With the template printed side up, sew along **Line 4** between **areas 3** and **5**, backstitching when starting and stopping.

Open **Piece 5** so that it is right side up and press the seam allowance with a seam roller. Cut around the dashed edges of the template to trim off all the excess fabric.

Repeat these steps for a total of **(4) Block A** & **(4) Block B**.