


# ZERO FULLY ADJUSTABLE FRAME SEALS

Sizes: 914mm (3 ft), 1219mm (4 ft), 1829mm (6 ft), 2134mm (7 ft), 3048mm (10 ft). Other sizes available to order, maximum 3048mm.

Finishes: A=mill aluminium, AA=clear anodised silver, B=seff colour brass (aka US bronze), D=dark bronze anodised, G=gold anodised, SP=steel primed, SPB=steel prime painted and STST=stainless steel where indicated.


Availability: usually ex-stock except items marked with an asterisk, which are to special order (3-5 weeks) depending on quantity.

Corrosion: 770AA has been successfully tested to Grade 4 (240 hours neutral salt spray exposure) in accordance with BS EN 1670:2007 Building Hardware - Corrosion Resistance. Report No WIL 392103 dated 30.01.2018 refers.

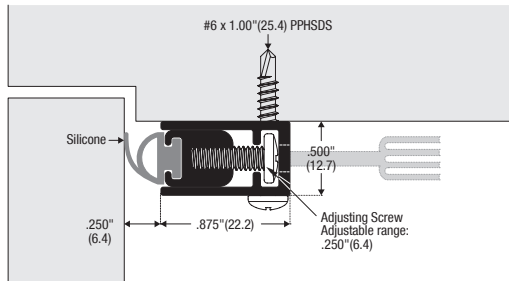

## 870AA


Adjustable sound seal. Included in acoustic tests up to 49 STC. Adjusted from rear. Available D finish to order. 870AA Anodised aluminium

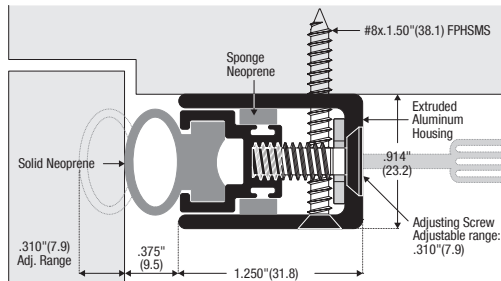

## 770AA, 770D


Adjustable sound seal. Included in acoustic tests up to 52 STC. Carrier adjusted from rear. Note uprights are handed if supplied mitred. 770AA Anodised aluminium 770D\* Dark bronze anodised

This product has been successfully tested to BS EN 1634-3:2004 and is suitable for smoke control doors. Leakage does not exceed 3m<sup>3</sup>/hour per metre of frame gap at a pressure of 25 Pa. Copy of WF Report No 185149 available upon request.

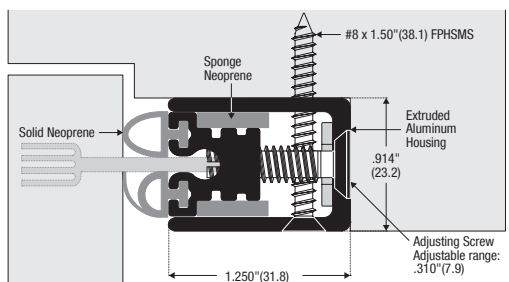


## 7770AA\*

Adjustable double neoprene sound seal. Adjusting screw accessed from front. Note uprights are handed if supplied mitred. Available D & G finishes to order. 7770AA\* Anodised aluminium

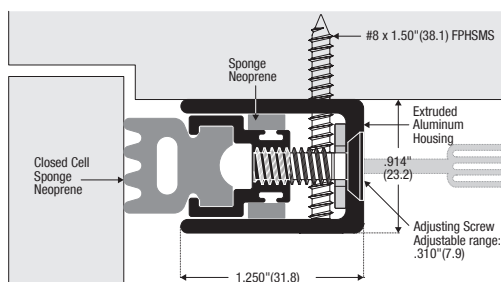


## 170AA\*

Adjustable closed cell sponge. Included in acoustic tests up to 51 STC. Carrier adjusted from rear. Note uprights are handed if supplied mitred. Available D & G finishes to order. 170AA\* Anodised aluminium

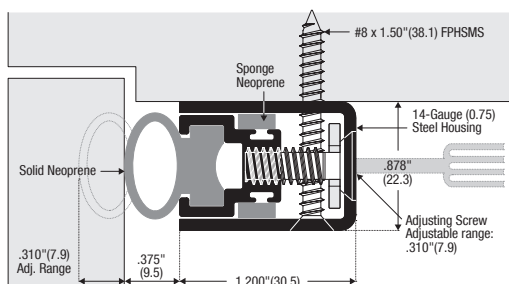

## 770SP, 770STST

Adjustable sound seal. Included in acoustic tests up to 52 STC. Carrier adjusted from rear. Note uprights are handed if supplied mitred. 770SP\* Steel primed 770STST\* Stainless steel

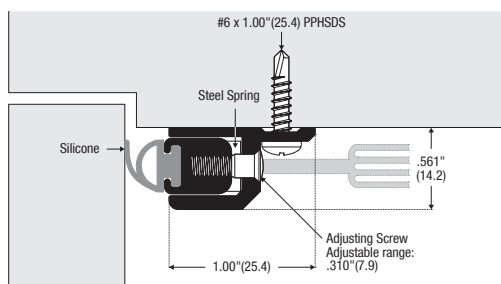

## 712AA

Adjustable spring loaded seal. Steel spring, adjusted from rear. Available D finish to order. 712AA\* Anodised aluminium