


STAINLESS STEEL LETTER PLATE SETS

NON-FIRE RATED

Stainless steel letter plate assembly to suit non-fire rated doors. The set includes external letter plate, internal flap and aperture liner. Available to suit doors of different thicknesses; 42-47mm thick, 47-52mm thick and 52-57mm thick. Internal security catch ZLP11-BSS available to order separately, see below.

Finish:	Brushed stainless steel. Other finishes available to special order.	
Size:	312x80mm overall outside dimension. Aperture size 250x40mm.	
Fixings:	Supplied complete with fixing bolts.	
Fire rating:	Not fire rated.	
ZLP01-44-BSS	Non-fire rated letter plate set for 42-47mm thick doors	(Box Qty 1)
ZLP01-49-BSS*	Non-fire rated letter plate set for 47-52mm thick doors	(Box Qty 1)
ZLP01-54-BSS*	Non-fire rated letter plate set for 52-57mm thick doors	(Box Qty 1)

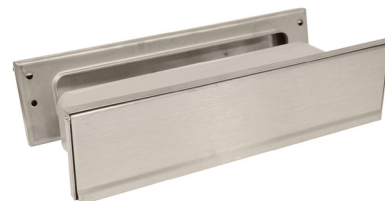

ONE HOUR FIRE RATED

Stainless steel letter plate assembly to suit fire rated doors up to 60 minutes, with fire attack from either face. The set includes external letter plate, internal flap and integral PVC encased intumescent aperture liner. Available to suit doors of different thicknesses; 42-47mm thick, 47-52mm thick and 52-57mm thick. Internal security catch ZLP11-BSS available to order separately, see below.


Finish:	Brushed stainless steel. Other finishes available to special order.	
Size:	312x80mm overall outside dimension. Aperture size 250x40mm.	
Fixings:	Supplied complete with fixing bolts. To be fitted between 250mm and 1700mm from floor level.	
Fire rating:	60 minutes on timber and steel doors. Certifire approved, Certificate No CF 255.	
ZLP02-44-BSS	Fire rated letter plate set for 42-47mm thick doors	(Box Qty 1)
ZLP02-49-BSS	Fire rated letter plate set for 47-52mm thick doors	(Box Qty 1)
ZLP02-54-BSS	Fire rated letter plate set for 52-57mm thick doors	(Box Qty 1)



ONE HOUR FIRE & SMOKE RATED

Stainless steel letter plate assembly to suit fire rated doors up to 60 minutes, including smoke seals, with fire attack from either face. This set has been evaluated against BS 476-31.1 for the control of cold smoke and has a leakage rate of 1.5m³/hour/metre of frame crack at 25 Pa. The set includes external letter plate, internal flap, integral PVC encased intumescent aperture liner and smoke seals. Available to suit doors of different thicknesses; 42-47mm thick, 47-52mm thick and 52-57mm thick. Internal security catch ZLP11-BSS available to order separately, see below.

Finish:	Brushed stainless steel. Other finishes available to special order.	
Size:	312x80mm overall outside dimension. Aperture size 250x40mm.	
Fixings:	Supplied complete with fixing bolts. To be fitted between 250mm and 1700mm from floor level.	
Fire rating:	60 minutes on timber and steel doors. Certifire approved, Certificate No CF 255.	
Sound:	Acoustic version available to special order, achieving 31 dB Rw sound reduction. Suffix ref "A".	
ZLP03-44-BSS*	Fire & smoke rated letter plate set for 42-47mm thick doors	(Box Qty 1)
ZLP03-49-BSS	Fire & smoke rated letter plate set for 47-52mm thick doors	(Box Qty 1)
ZLP03-54-BSS*	Fire & smoke rated letter plate set for 52-57mm thick doors	(Box Qty 1)

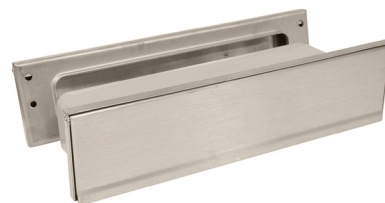


LETTER PLATE ACCESSORIES



ZLP10-BSS

Internal security cowl, 320x78x57mm. Obstructs view from outside, prevents manipulation of locks/bolts, tampering and attack from outside. To suit letter plates above.

(Box Qty 1)

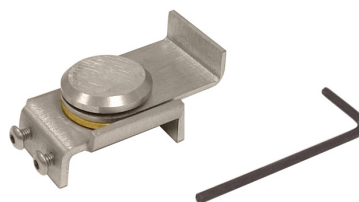

ZLP11-BSS

Internal security catch, secures inner flap in the closed position. Rotate to open or close. To suit letter plates above.

(Box Qty 1)