

ZERO RABBETED THRESHOLDS


Sizes: 914mm (3 ft), 1219mm (4 ft), 1829mm (6 ft), 2134mm (7 ft), 3048mm (10 ft). Other sizes available to order, maximum 3048mm.

Finishes: A=mill aluminium, B=self colour brass (aka US bronze), D=dark bronze anodised, E=epoxy, STST=stainless steel and V3=full body strength where indicated. Replacement black flipper gasket 486N available.

Availability: usually ex-stock except items marked with an asterisk, which are to special order (3-5 weeks) depending on quantity.

Fire: 564, 566, 568, 265 and 65 thresholds have been assessed as suitable for use on steel fire doors up to 240 minutes integrity. Copy of Report No 326152 Issue 2 dated 15.02.2013 available on request (reviewed and revalidated by WF Report No 396330).

Corrosion: Zero rabbeted thresholds have been successfully tested to Grade 4 (240 hours neutral salt spray exposure) in accordance with BS EN 1670:2007 Building Hardware - Corrosion Resistance. Report No WIL 392103 dated 30.01.2018 refers.

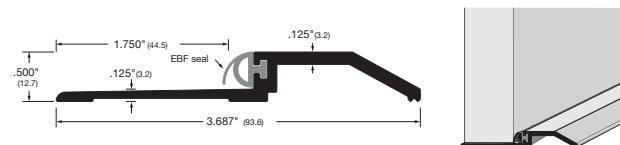

564A, 564B, 564D


94mm wide x 12.7mm high rabbeted threshold with black neoprene seal. Doc M compliant.

564A Aluminium, mill finish

564B Brass, self colour

564D* Dark bronze anodised

This product has been successfully tested to BS EN 1634-3:2004 and is suitable for smoke control doors. Leakage does not exceed 3m³/hour per metre of frame gap at a pressure of 25 Pa. Copy of WF Report No 185149 available upon request.




566A, 566B

127mm wide x 12.7mm high rabbeted threshold with black neoprene seal. Doc M compliant.

566A Aluminium, mill finish


566B* Brass, self colour



566A-ADA

127mm wide x 12.7mm high rabbeted threshold with black neoprene seal. Inclined surface under door for US ADA. Doc M compliant.


566A-ADA Aluminium, mill finish



568A

152mm wide x 12.7mm high rabbeted threshold with black neoprene seal. Doc M Compliant.


568A Aluminium, mill finish



265A

127mm wide x 15.9mm high latchtrack rabbeted threshold with black neoprene seal, for use with pullman panic bolts.


265A Aluminium, mill finish



65A

127mm wide x 12.7mm high latchtrack rabbeted threshold with black silicone seal, for use with pullman panic bolts. Doc M compliant.

65A Aluminium, mill finish

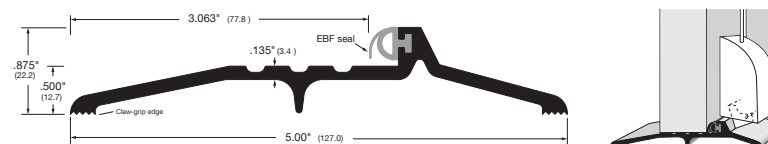

560A

127mm wide x 22mm high latchtrack rabbeted threshold with black neoprene seal, for use with pullman panic bolts.

560A Aluminium, mill finish