

ZERO MODULAR THRESHOLDS

With the Zero range of modular thresholds you can specify combinations of products to suit specific door openings. Flat plates are manufactured from 6.4mm thick aluminium and are available 51mm, 76mm, 102mm, 127mm, 152mm, 203mm and 254mm wide. Threshold plates are grooved on top to provide a non-slip surface. The 268A or 68A threshold rests are placed either side of the threshold to avoid a trip hazard, and give a finished plate height of 9.5mm and 12.7mm respectively. The threshold plates are notched on the underside and can be linked together in different combinations to achieve the desired overall width using the 469A or 269A assembly connectors. (469A with 268A and 269A with 68A).

Threshold plates are supplied open grooved as standard. They can be ordered with non-slip epoxy abrasive particles bonded into the grooves.







To order, add -E after the product code.
Example 672A-E.

Threshold plates may also be used with Traction Tread shown on page 31.



Plates are supplied undrilled (NH) as standard, except 47A and 905A which are drilled as standard.

ALUMINIUM PLATE WIDTH	STANDARD PLATE REF	EPOXY PLATE REF
51MM WIDE	672A	672A-E*
76MM WIDE	673A	673A-E*
102MM WIDE	674A	674A-E*
127MM WIDE	675A	675A-E*
152MM WIDE	676A	676A-E*
203MM WIDE	678A	678A-E*
254MM WIDE	6710A	6710A-E*

Standard lengths: 914mm, 1219mm, 1829mm, 2134mm and 3048mm

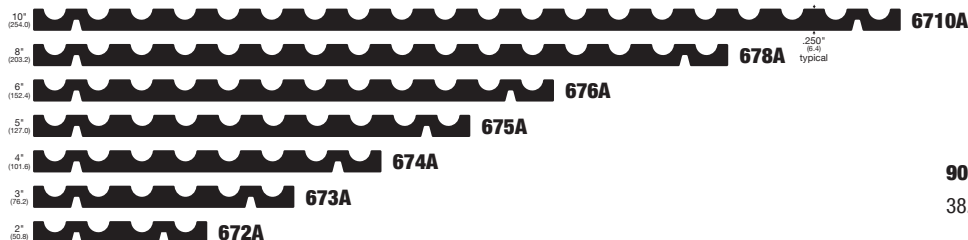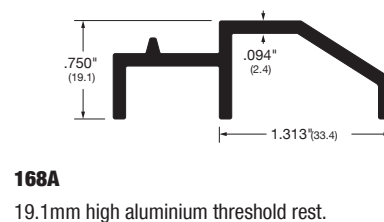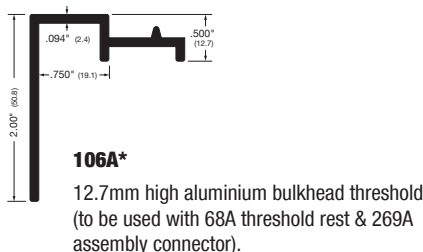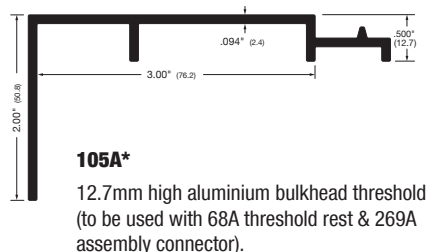

All 6.4mm high.

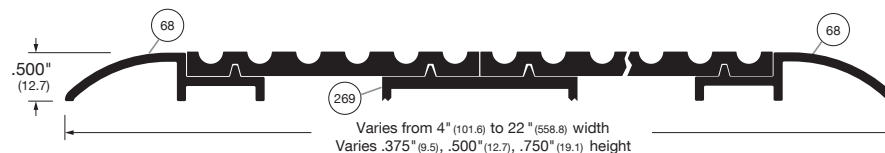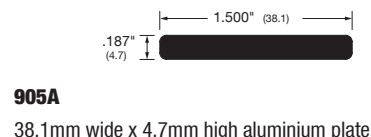

Typical modular application, overall width varying from 102mm to 559mm. Finished height either 9.5mm, 12.7mm or 19.1mm (9.5mm illustrated).