



PAN4X1X30

4x 30 W COB RGB LED PIXEL CONTROL PANEL



Photometric	
Light Source	4x 30 W RGBW COB LEDs
Beam Angle	60°
Output	968 lux @ 2 m
PWM	11,700 Hz
LED Lifespan	50,000 hours
Effects	
Dimming	0~100%, 8-bit + 4x 16-bit dimming curves
Strobe	1~30 Hz
Power	
Input Voltage	100~240V AC, 50/60 Hz
Power Consumption	120 W
Connection	IEC in/out
Control	
Operation Modes	DMX, manual, auto, sound active, master/slave multi fixture chase
Control Protocol	DMX512
DMX Channels	3/5/9/12/17
Control Interface	3-pin XLR (optional: 5-pin XLR)
Display	4-button LCD control panel
Housing	
Housing Materials	Aluminium
Housing Finish	Matte black
Cooling	Fanless cooling with temperature control
IP Rating	IP20
Net Weight	4 kg
Accessories	
Optional	Road Case: PAN4X1CASEWC

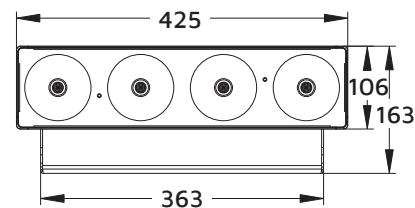

Lux @ 60°					
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø1.15	Ø2.31	Ø3.46	Ø4.62	Ø5.77
R	943	285	135	76	52
G	1,028	308	149	85	57
B	1,040	320	151	85	56
Full	2,920	968	418	239	159