
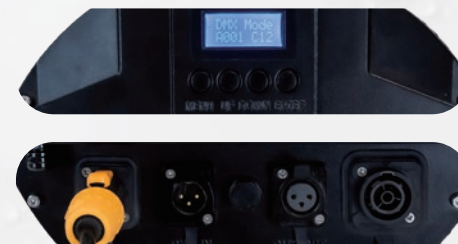


# PAR19X150

19x 15 W OUTDOOR RGBW PARCAN WITH SECTION CONTROL

The **PAR19X150** is a solid outdoor par fixture which comes standard with 25° lenses, which can be changed to 9°, 15° or 50° to suit varying applications and beam throws.

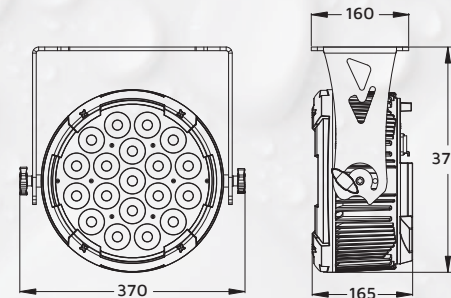

<b>Photometrics</b>		<b>Section Control</b>	3
Light Source	19x 15 W RGBW 4-in-1 LEDs	RDM	Change DMX Address
Beam Angle	25° (optional: 9°, 15°, 50°)	Control Protocol	DMX512, RDM
Output	12,000 lux @ 2 m @ 25° full on	DMX Channels	3/4/6/7/10/12/14/24
PWM	2,940 Hz	Control Interface	Seetronic 3-pin outdoor DMX in/out
LED Lifespan	50,000 hours	Display	4-button LCD control panel
<b>Effects</b>		<b>Housing</b>	
Dimming	0~100%, 8/16-bit	Housing Materials	Die-cast aluminium
Fade Modes	5	Housing Finish	Matte black
Strobe	1~25 Hz	Cooling	Fanless cooling with temperature protection
<b>Power</b>		IP Rating	IP65
Input Voltage	100~240 V AC, 50/60 Hz	Net Weight	9.5 kg
Power Consumption	250 W	<b>Accessories</b>	
Connection	Seetronic® outdoor TRUE1 in/out	Included	1x 1 m Seetronic® outdoor powercon extension cable 1x 1 m Seetronic® outdoor DMX extension cable
<b>Control</b>		Optional	Road Case: PAR19CASE Rigging: 1x omega bracket with 1/4 turn quick locks
Operation Modes	DMX, manual, auto, sound active, master/slave, multi fixture chase		

Lux @ 25°					
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø0.44	Ø0.89	Ø1.33	Ø1.77	Ø2.22
<b>R</b>	11,000	2,500	1,200	660	440
<b>G</b>	17,000	4,700	2,100	1,220	800
<b>B</b>	3,900	1,150	525	300	200
<b>W</b>	20,000	5,700	2,600	1,460	950
<b>Full</b>	41,000	12,000	5,240	2,970	1,940

Lux @ 9° optional					
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø0.16	Ø0.31	Ø0.47	Ø0.63	Ø0.79
<b>R</b>	35,200	9,650	4,330	2,350	1,460
<b>G</b>	55,400	21,200	9,800	5,650	3,570
<b>B</b>	22,000	7,000	3,000	2,050	1,200
<b>W</b>	58,800	22,300	10,200	5,850	3,730
<b>Full</b>	130,000	45,600	21,600	12,300	7,860

Lux @ 15° optional					
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø0.26	Ø0.53	Ø0.79	Ø1.05	Ø1.23
<b>R</b>	23,300	6,540	2,940	1,670	1,059
<b>G</b>	34,400	10,170	4,560	2,560	1,641
<b>B</b>	13,000	3,900	1,800	980	650
<b>W</b>	36,100	10,800	4,870	2,730	1,755
<b>Full</b>	82,000	24,300	11,130	6,250	3,950

Lux @ 50° optional					
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø0.93	Ø1.87	Ø2.80	Ø3.73	Ø4.66
<b>R</b>	3,850	1,003	490	298	213
<b>G</b>	6,500	1,706	801	481	338
<b>B</b>	2,306	630	290	170	128
<b>W</b>	7,020	1,835	870	528	373
<b>Full</b>	15,200	4,010	1,905	1,150	824



Booloominhbah Historic House - Macsound