



PAR19X15

19 X 15W RGBW Section Control Pro PAR

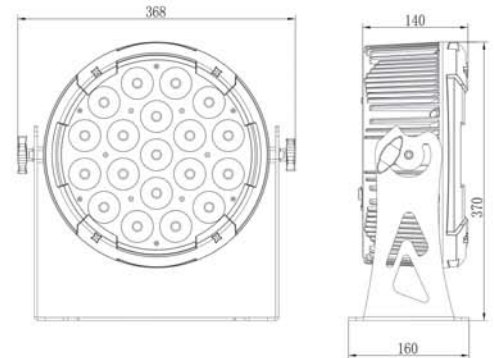

Distance

1.0 2.0 3.0 4.0 5.0

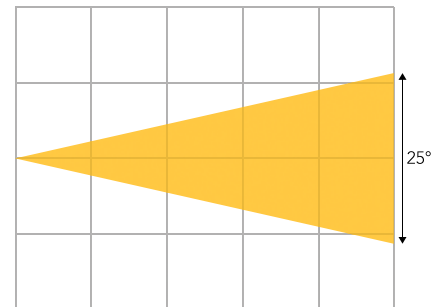

| | |
|-------------------|----------------------------|
| MODEL | PAR19X15 |
| Description | 19 x 15W RGBW Pro PAR |
| Series | Professional PAR Can |
| POWER | |
| Power Consumption | 250W |
| Line Voltage | 100-240V AC |
| Frequency | 50Hz to 60Hz |
| Power Connection | Neutrik® powerCON In / Out |

| | |
|-------------------|--|
| CONTROL | |
| Operational Modes | Static, Color Fade, Auto Program, Sound Active, Master / Slave & DMX Modes |
| Display | 4-Button LCD Control Panel |
| DMX Protocol | DMX512 |
| DMX Channel Mode | 3 / 4 / 6 / 7 / 10 / 12 / 14 / 24 |
| DMX Interface | 3-Pin & 5-Pin XLR |
| RDM | Yes |

| | |
|---------------------|-----------------------------|
| PHOTOMETRICS | |
| Light Source | 19 x 15W RGBW LEDs |
| Beam Angle | 25° (Optional 9°, 15°, 50°) |
| Output (@2M) | 12,000 lux |
| PWM | 1,200 Hz |
| LED Lifespan | 50,000 hours |

| | |
|-------------------|----------------------------|
| HOUSING | |
| Housing Materials | Die-cast Aluminium Housing |
| Housing Finish | Matte Black |
| Cooling | Fanless Cooling |
| Dimension (mm) | 368 X 370 X 160 |
| Net Weight | 9.5 kg |

| | |
|--------------------|--|
| EFFECTS | |
| Dimming (0 - 100%) | 16-bit Dimming Control |
| Fade Modes | Standard, Stage, TV, Architecture, Theatre |
| Strobe | 1 Hz - 30 Hz |

| | |
|-------------|-----------|
| MISC | |
| Road Case | PAR19CASE |

| LUX @ 25° | ∅ 0.44 | ∅ 0.89 | ∅ 1.33 | ∅ 1.77 | ∅ 2.22 |
|-----------|--------|--------|--------|--------|--------|
| R | 11000 | 2500 | 1200 | 660 | 440 |
| G | 17000 | 4700 | 2100 | 1220 | 800 |
| B | 3900 | 1150 | 525 | 300 | 200 |
| W | 20000 | 5700 | 2600 | 1460 | 950 |
| Full | 41000 | 12000 | 5240 | 2970 | 1940 |

