


PAR5X12

5x 12 W RGBWAU PARCAN

The **PAR5X12** is a compact 6-in-1 par fixture with 5x 12 W RGBWAU LEDs. A 30° beam angle is standard, with optional 15° or 55° lenses available.

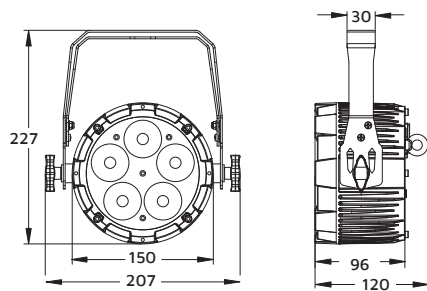

Lux @ 30°					
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø0.54	Ø1.07	Ø1.61	Ø2.14	Ø2.68
R	980	265	105	60	41
G	1,350	350	165	90	62
B	925	250	112	65	45
W	1,680	560	250	145	98
A	850	220	90	50	38
U	260	68	30	18	12
Full	5,800	1,420	635	365	235

Lux @ 55° optional					
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø1.04	Ø2.08	Ø3.12	Ø4.16	Ø5.21
R	330	79	36	20	14
G	570	140	67	40	28
B	370	90	45	35	25
W	680	180	83	48	32
A	345	87	41	23	16
U	42	11	5	4	2
Full	1,730	450	204	123	85



Photometrics	
Light Source	5x 12 W RGBWAU 6-in-1 LEDs
Beam Angle	30° (optional: 15°, 55°)
Output	1,420 lux @ 2 m @ 30° full on
PWM	2,940 Hz
LED Lifespan	50,000 hours
Effects	
Dimming	0~100%, 8-bit + 3x 16-bit dimming curves
Strobe	1~30 Hz
Power	
Input Voltage	100~240V AC, 50/60 Hz
Power Consumption	50 W
Connection	NEUTRIK® powerCON in/out
Control	
Operation Modes	DMX, manual, auto, sound active, master/slave, multi fixture chase
Control Protocol	DMX512
DMX Channels	2/3/6/8/12
Control Interface	3-pin XLR (optional: 5-pin XLR)
Display	4-button LCD control panel
Housing	
Housing Materials	Die cast aluminium
Housing Finish	Matte black
Cooling	Fanless cooling with temperature protection
IP Rating	IP20
Net Weight	1.9 kg
Accessories	
Optional	Road Case: PAR5CASEWC, PAR5BDCASEWC Rotating Barn Door: PAR5RBD

