


PARRGBW5X8

5x 8 W RGBW PARCAN

PAR5X8A

5x 8 W RGBA PARCAN

Compact 4-in-1 fixtures with RGB and either White or Amber LEDs.

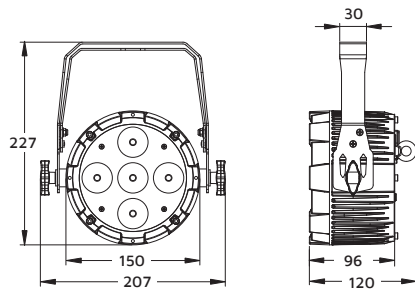

Lux	@ 22° PARRGBW5X8				
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø0.39	Ø0.78	Ø1.17	Ø1.56	Ø1.94
R	1,784	457	210	118	78
G	1,743	467	213	121	81
B	2,327	588	273	149	98
W	2,648	786	357	201	135
Full	7,190	1,910	883	489	338

Lux	@ 55° PARRGBW5X8 optional				
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø1.04	Ø2.08	Ø3.12	Ø4.16	Ø5.21
R	636	147	69	39	28
G	1,020	263	121	72	48
B	640	160	70	40	30
W	1,080	274	127	74	51
Full	2,570	668	307	178	123

Lux	@ 22° PAR5X8A				
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø0.39	Ø0.78	Ø1.17	Ø1.56	Ø1.94
R	2,600	626	271	157	108
G	2,810	728	325	190	120
B	2,100	500	230	135	82
A	2,310	520	260	142	95
Full	5,350	1,350	605	348	235

Lux	@ 55° PAR5X8A optional				
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø1.04	Ø2.08	Ø3.12	Ø4.16	Ø5.21
R	620	153	76	44	32
G	757	203	96	58	43
B	550	130	70	40	30
A	630	163	82	48	35
Full	1,700	460	225	137	100

Photometrics	
Light Source	PARRGBW5X8: 5x 8 W RGBW 4-in-1 LEDs PAR5X8A: 5x 8 W RGBA 4-in-1 LEDs
Beam Angle	22° (optional: 55°)
Output	PARRGBW5X8: 1,910 lux @ 2 m @ 22° full on PAR5X8A: 1,350 lux @ 2 m @ 22° full on
PWM	2,940 Hz
LED Lifespan	50,000 hours
Effects	
Dimming	0~100%, 8-bit + 3x 16-bit dimming curves
Strobe	1~30 Hz
Power	
Input Voltage	100~240 V AC, 50/60 Hz
Power Consumption	40 W
Connection	IEC in
Control	
Operation Modes	DMX, manual, auto, sound active, master/slave, multi-fixture chase
Control Protocol	DMX512
DMX Channels	2/3/4/6/10
Control Interface	3-pin XLR (optional: 5-pin XLR)
Display	4-button LCD control panel
Housing	
Housing Materials	Die cast aluminium
Housing Finish	Matte black
Cooling	Fanless cooling with temperature protection
IP Rating	IP20
Net Weight	1.9 kg
Accessories	
Optional	Road Case: PAR5CASEWC, PAR5BDCASEWC Rotating Barn Door: PAR5RBD

