


# PIXBAR12X12

12x 12 W RGBWAU PIXEL CONTROL BAR (BLACK)

# PIXBAR12X12W

12x 12 W RGBWAU PIXEL CONTROL BAR (WHITE)

Event Lighting PIXBARs are perfect for fixed installations and productions. All models feature pixel control, an aluminium housing and fanless operation, making them silent and virtually maintenance free.

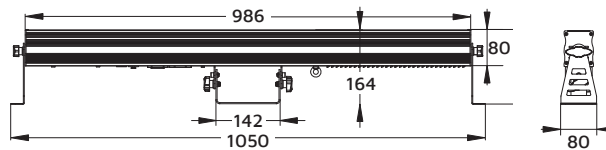

## Photometrics

Light Source	12x 12 W RGBWAU 6-in-1 LEDs
Beam Angle	30° (optional: 55°)
Output	2,050 lux @ 2 m @ 30° full on
PWM	12,000 Hz
LED Lifespan	50,000 hours

## Effects

Dimming	0~100%, 8-bit + 3x 16-bit dimming curves
Strobe	1~30 Hz

## Power

Input Voltage	100~240 V AC, 50/60 Hz
Power Consumption	150 W
Connection	NEUTRIK® powerkon in/out

## Control

Operation Modes	DMX, manual, auto, sound active, master/slave, multi fixture chase
-----------------	--

Control Protocol	DMX512
DMX Channels	3/4/6/8/12/24/72/74
Control Interface	3-pin XLR (optional: 5-pin XLR)
Display	4-button LCD control panel

## Housing

Housing Materials	Aluminium
Housing Finish	Matte black/white
Cooling	Fanless cooling with temperature control
IP Rating	IP20
Net Weight	4.5 kg

## Accessories

Optional	Road Case: PIXBAR12CASE6WC
----------	----------------------------

## Lux @ 30°

	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø0.54	Ø1.07	Ø1.61	Ø2.14	Ø2.68
<b>R</b>	913	375	190	119	87
<b>G</b>	1,164	486	250	156	113
<b>B</b>	1,157	468	240	154	109
<b>W</b>	1,706	678	351	219	158
<b>A</b>	673	257	135	189	67
<b>U</b>	290	116	59	36	26
<b>Full</b>	5,180	2,050	1,067	660	471

## Lux @ 55°

	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø1.04	Ø2.08	Ø3.12	Ø4.16	Ø5.21
<b>R</b>	528	175	90	57	43
<b>G</b>	1,100	380	197	131	85
<b>B</b>	520	170	80	50	40
<b>W</b>	1,200	405	208	135	95
<b>A</b>	630	207	112	75	50
<b>U</b>	92	31	16	10	6
<b>Full</b>	3,250	1,110	570	355	260

