
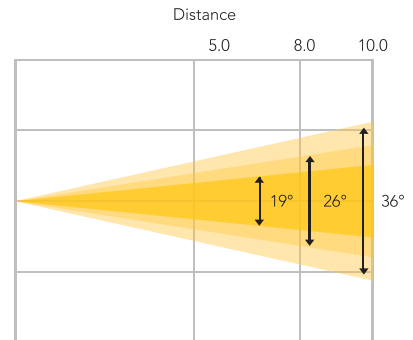
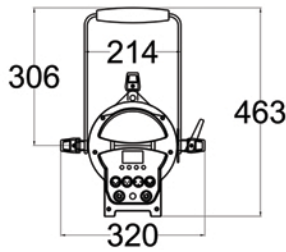


PS200IIFC

200W LED Full Colour Profile Spot

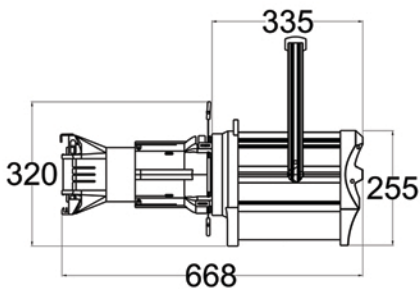

| LUX @ 19° | ∅ 1.67 | ∅ 2.68 | ∅ 3.35 |
|-----------|--------|--------|--------|
| R | 85 | 35 | 22 |
| G | 131 | 52 | 33 |
| B | 33 | 13 | 8 |
| CW | 825 | 322 | 206 |
| WW | 142 | 56 | 35 |
| A | 45 | 18 | 11 |
| L | 153 | 60 | 38 |
| Full | 933 | 365 | 235 |

| LUX @ 26° | ∅ 2.31 | ∅ 3.69 | ∅ 4.62 |
|-----------|--------|--------|--------|
| R | 78 | 32 | 20 |
| G | 121 | 48 | 33 |
| B | 31 | 14 | 7.8 |
| CW | 759 | 299 | 190 |
| WW | 132 | 5 | 33 |
| A | 43 | 18 | 11 |
| L | 141 | 58 | 35 |
| Full | 860 | 337 | 220 |

| LUX @ 36° | ∅ 3.25 | ∅ 5.20 | ∅ 6.50 |
|-----------|--------|--------|--------|
| R | 56 | 23 | 14 |
| G | 88 | 35 | 22 |
| B | 23 | 8.6 | 5.5 |
| CW | 540 | 210 | 135 |
| WW | 95 | 37 | 23 |
| A | 30 | 13 | 7.5 |
| L | 100 | 40 | 25 |
| Full | 610 | 238 | 155 |

MODEL PS200IIFC

Description 200W LED Full Colour Profile Spot

Series Profile Spot

POWER

Power Consumption 200W
Input Voltage 100 – 240V AC 50 / 60Hz
Power Connection Seetronic® True 1 In / Out

PHOTOMETRICS

Light Source 200W RGBACWL LEDs
 RGB: 3x LEDs Each
 Amber: 3x LEDs
 Cold White: 12x LEDs
 Warm White: 6x LEDs
 Lime: 6x LEDs
Beam Angle 19°, 26°, 36°
Output (@5M at 19°) 933 lux
Optional Lens PS19IILENS, PS36IILENS
PWM 8,000 Hz
LED Lifespan 50,000 hours

EFFECTS

Dimming 0 - 100%, 8-bit / 16-bit
Strobe 1 Hz - 25 Hz
Gobo Holder 'B' 86mm overall size, 59mm image size
Iris PSIRIS (Optional)

CONTROL

Operation DMX, Manual & Master / Slave
Display 4-Button LCD Control Panel
DMX Protocol DMX512
DMX Channels 8
DMX Interface 3-Pin and 5-Pin XLR

HOUSING

Housing Materials & Finish Matte Black Aluminium
Cooling Sensor Thermostat Controlled Variable Speed Fan
Dimension (mm) 668 X 320 X 463
Net Weight (kg) 12

