
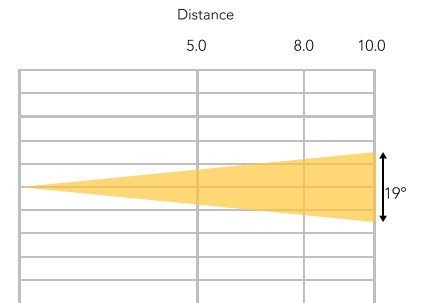
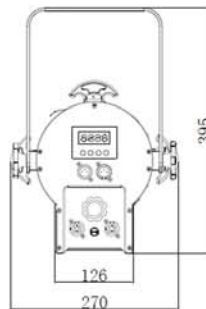


PS200/PS200RGBW

200W LED Profile Spot

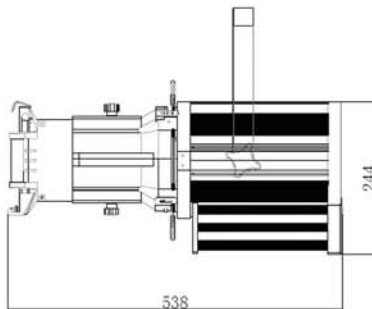

LUX @ 19°	Ø 1.67	Ø 2.68	Ø 3.35
3000 K	4,400	1,719	1,100
5600 K	4,840	1,890	1,210

LUX @ 19°	Ø 1.67	Ø 2.68	Ø 3.35
R	876	342	219
G	1,524	595	381
B	440	172	110
W	1,524	595	381
Full	4,000	1,563	1,000

MODEL PS200 / PS200RGBW

Description Profile Spot
Series Theatre

POWER

Power Consumption 200W
Line Voltage 100-240V AC
Frequency 50Hz to 60Hz
Power Connection Neutrik® powerCON In / Out

PHOTOMETRICS

Light Source 200W/200WRGBW LED
Colour Temperature 3,000 K - 5,600 K / N/A
Beam Angle 19°
Output (@5M) 4,400 lux (3,000 K)
4,840 lux (5,600 K)
4,000 lux
PWM 8,000 Hz
LED Lifespan 50,000 hours
*PS200RGBW Model Only

EFFECTS

Dimming (0 - 100%) 16 bit
Strobe 1 Hz - 25 Hz
Gobo Holder 'B' 86mm overall size,
59mm image size
Iris PSIRIS (Optional)

CONTROL

Operational Modes Manual, Master / Slave & DMX
Display 4-Button LCD Control Panel
DMX Protocol DMX512
DMX Channel Mode 2 / 3 / 4 / 4 / 5 / 6
DMX Interface 3-Pin XLR

HOUSING

Housing Materials Aluminium
Housing Finish Matte Black
Cooling Multi Sensor Thermostat
Controlled Variable Speed Fan
Dimension (mm) 395 X 270 X 538
Net Weight 11.5 kg

