


# WIP1320

1320x 0.8 W IP65 RGBW STROBE LIGHT  
WITH 6-SECTION CONTROL

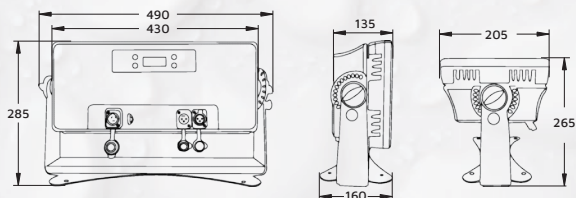

## Photometrics

Light Source	1320x 0.8 W SMD5050 RGBW LEDs
Beam Angle	120°
Output	2,200 lux @ 3 m
PWM	5,000 Hz
LED Lifespan	50,000 hours

## Effects

Dimming	0~100%, 8-bit
Strobe	0.5~25 Hz

## Power

Input Voltage	100~240 V AC, 50~60 Hz, 1,150 W
Connection	Seetronic® outdoor True1 in

## Control

Operation Modes	DMX, auto, manual, master/slave
Display	4-button LCD control panel
Control Protocol	DMX512
DMX Channels	4/5/7/13/15/31
Control Interface	3-pin XLR

## Housing

Housing Materials	Die-cast aluminium, matte black finish
IP Rating	IP65
Cooling	Thermostat controlled fan
Net Weight	10.1 kg
Rigging	2x omega brackets with 1/4 turn quick locks



Lithgow Silos - DC Electric Custom Circuits