ARKO WALL HUNG

CERAMIC TOILET SUITE



Wall hung toilet suite - Clean Flush

Wall hung pan - details:

- Stylish minimalist design, sits flat against wall
- Clean Flush rimless pan design for an efficient, powerful flush
- White vitreous china
- Easy-clean quick release seat with stainless steel pins, soft closing

In-wall cistern with frame - details:

- Hidden cistern activated through a premium pneumatic system connected to the flush plate buttons
- Fully insulated with anti-condensation foam to prevent moisture escape
- Easy to install and service through the flush plate
- WELS 4 star 4.5/3L water saving flush

TOILET SUITE — Standard wall installation — C200 CISTERN 191849 Arko WH suite with C200 in-wall cistern, flat seat

TOILET SUITE - Nib wall installation - C201 CISTERN 191910 Arko WH suite with C201 in-wall cistern, flat seat

TOILET PAN and seat only (NO CISTERN)

191165 Arko WH pan (includes pan and flat seat only)

Order flush buttons separately.

Product details


Wall faced with rimless Clean Flush pan design.


MATERIAL White vitreous china


TRAPS Suitable for P trap installations.

Quick release seat with stainless steel hinges, soft closing. SEAT

WELS 4 star rating 4.5/3 litre water saving flush. CISTERN Wall hung pan suits in-wall cistern with frame.











Please note


- Installation shall be in accordance with AS/NZS3500.
- All measurements are in millimetres. Height dimensions are to base of pan. Make allowance for bedding - Bedding: Pan may be bedded with cement base or using silicone sealant.
- Fix pan to floor using a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast-drying cement.
- Bracket fixing: The pan should be bedded with silicone sealant and fixed with the brackets supplied. Do NOT use epoxy type adhesives.
- Dimensions are nominal and subject to normal ceramic manufacturing variations.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.

ARKO WALL HUNG Data sheet page 2

Installation types for WALL HUNG TOILETS




The C200 cistern can be installed within a standard wall, allowing for a cistern thickness of 80 mm. The flush button plate is placed on the wall above the toilet pan (front access). The cistern can be serviced through the flush plate. The C200 cistern can also be used in a nib wall.




The C201 cistern can be installed within a nib wall, allowing for a cistern thickness of 130 mm. The flush button plate is placed either on the wall above the toilet pan (for front access) OR on the top of the nib wall (for top access).

ARKO WALL HUNG pan + C200 IN-WALL SLIM cistern

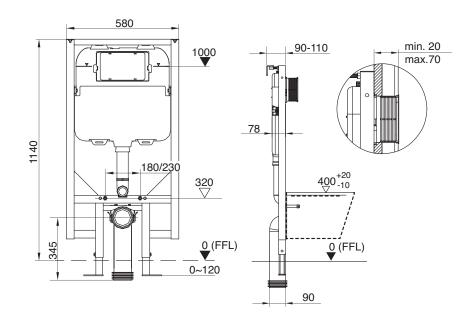

ARKO WALL HUNG pan + C201 IN-WALL **UNDERCOUNTER** cistern

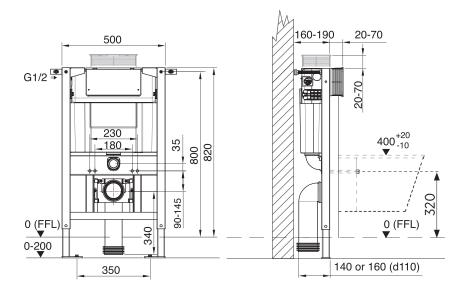



Please note

- Installation shall be in accordance with AS/NZS3500.
- All measurements are in millimetres. Height dimensions are to base of pan. Make allowance for bedding.
- Bedding: Pan may be bedded with cement base or using silicone sealant.
- Fix pan to floor using a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast-drying cement.
- Bracket fixing: The pan should be bedded with silicone sealant and fixed with the brackets supplied.
- Do NOT use epoxy type adhesives. - Dimensions are nominal and subject to normal ceramic manufacturing variations.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.