

borg &  
overström



---

Distinctive  
by design.

C2  
C3

borg&  
overström

## High-capacity output

These tap systems bring high-capacity refreshment to any commercial environment. Combining elegance with performance, this water dispenser meets demand every time. A simple pull of the chrome faucet provides thirst-quenching ambient, chilled, or sparkling water.



C2 twin head tap system



C3 triple head tap system

---

Distinctive  
by design.

---

## A durable performer

Designed for endurance, the fine engineering and quality construction ensures dependable performance at all times. It delivers an impressive throughput of 80 litres per hour at a consistent chilled temperature, making it the perfect solution for busy environments.

---

## Simple to operate and maintain

These innovative tap systems bring a high-capacity refreshment solution to any commercial venture. Available as a two-tap or three-tap system, it's intuitive to use and requires minimal maintenance. Simplicity in execution.

---

## Versatile drip tray options

Integrated or freestanding stainless steel drip trays can be added to your tap system. Stainless steel is the perfect material match for water cooler dispensers. Unlike ordinary carbon or alloy steels, it won't ever corrode or rust. The integrated tray is compatible with the Alarmed Waste Kit for added convenience.

---

## Compact ProCore™ processor

Our premium tap systems include an ultra-compact ProCore™ unit which fits discreetly into any space. It's also low maintenance and fitted with the new eco R290 gas. The colour-coated GreenCoat® steel construction makes it sustainable and durable.

---

## Advanced UV protection built-in

As an option, the ProCore™ can be fitted with Viovandi™, a mercury-free and chemical-free UV water disinfection system. For complete peace of mind it also includes additional hygiene features via Borg & Overström's Totality® methodology.


---

## Performance-enhancing ventilation

A discreet, compact ventilation kit is included with this system allowing a continuous cycle of cool air. Designed to be fast and easy to install, the Simple-Fit Ventilation Base enables the ProCore™ processor to run at optimum performance.

---

Distinctive  
by design.

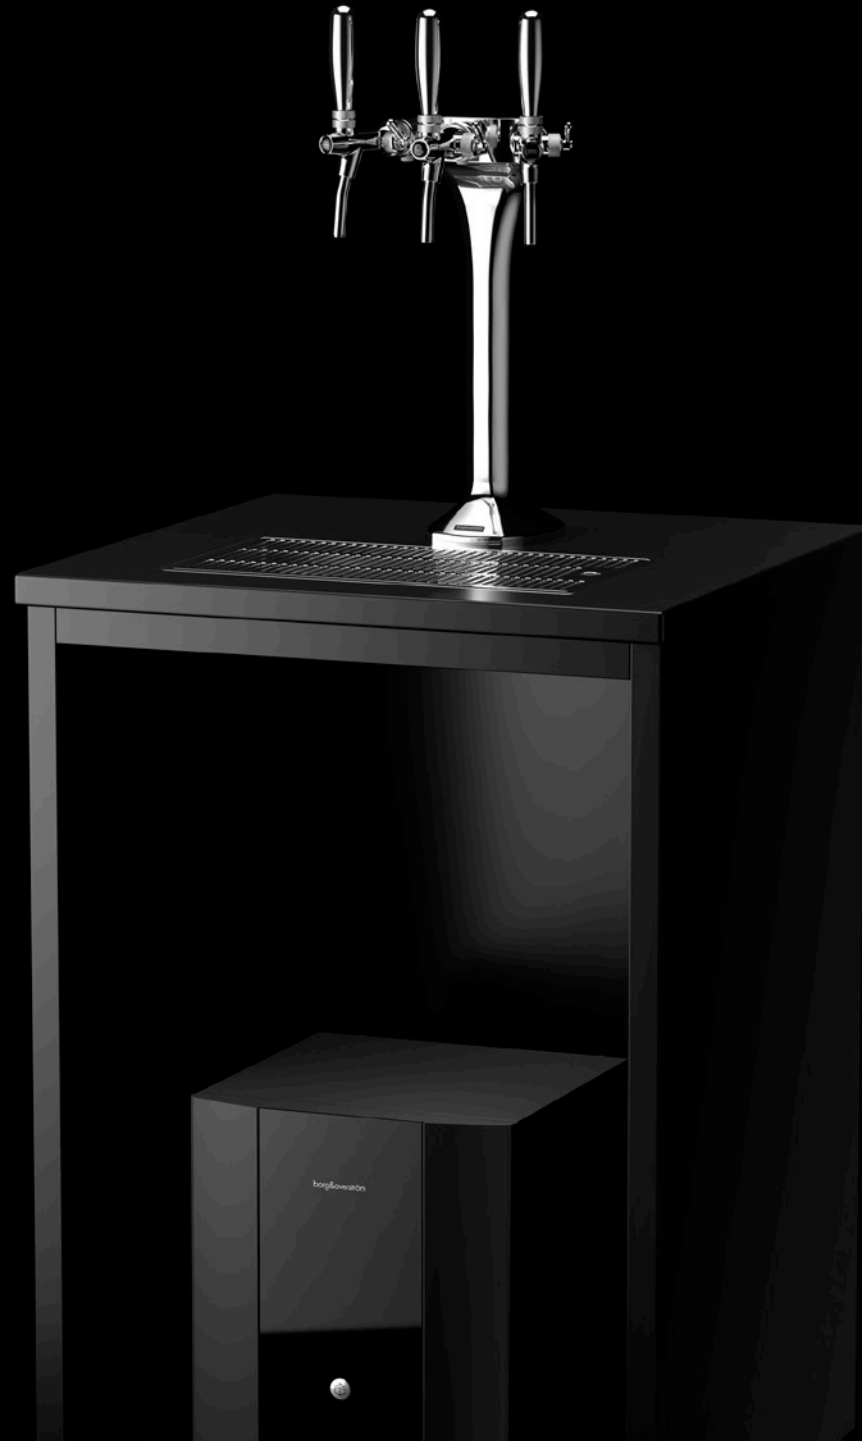


# borg& overström

## Water system



Dry Chill®

## Configurations



Integrated Tap

## Water options



Chilled



Ambient



Sparkling



Distinctive  
by design.



Totality® is our assurance that water dispensed from a Borg & Overström water dispenser is as safe as it is refreshing. Water dispensers with a six-star Totality® rating deliver an exceptionally high standard of hygiene.



**Advanced UV-led protection.**  
As an option, the C2/C3 can be fitted with Viovan®™, a mercury-free, chemical-free and energy-efficient LED-UV water purification system. For complete peace of mind, it also includes additional hygiene features via Borg & Overström's Totality® methodology.



**Sealed drinking water system.**  
Dry Chill® is the most hygienic cooling process. No water is stored within the system, which greatly reduces the opportunity for bacteria to become established. Dry Chill® also produces a larger volume of lower temperature water due to its faster recovery time.




**Independently certified anti-microbial, antipathogen sanitising procedure.**  
All dispensers are sterilised using Sterizen® sanitising infusion. No other brand of watercooler goes through this process, which is why only Borg & Overström appliances are laboratory certified to be 99.999% bacteria reduced.



**High-performing, easy to fit carbon filters.**  
3M carbon filters provide the highest level of water hygiene security for your dispenser over a longer period of time. All Borg & Overström water dispensers can be fitted with 3M carbon filters.

Distinctive  
by design.

Specifications	C2 ProCore+	Dispense options	Max power consumption	Tap dimensions	Chrome	Chrome ECO-UV
<b>Power requirements</b> Hertz 50/Volts 230-240	<b>Throughput flow rate</b> 80 litres per hour (LPH) 90 500ml bottles per hour (BPH)	Chilled & Ambient	210W	W165xD230xH465mm	746000	746010
<b>Water system</b> Dry Chill®		Chilled & Sparkling	260W	W165xD230xH465mm	746020	746030
<b>Chilled temperature</b> Min 2°C/Max 11°C	<b>C3 ProCore+</b>	<b>Dispense options</b>	<b>Max power consumption</b>	<b>Tap dimensions</b>	<b>Chrome</b>	<b>Chrome ECO-UV</b>
<b>Dispense height</b> 285mm						
<b>ProCore™ dimensions</b> W320xD375xH335mm	<b>Throughput flow rate</b> 80 litres per hour (LPH) 90 500ml bottles per hour (BPH)					
<b>Simple-fit Ventilation Base</b> W322xD431xH60mm (Includes 20mm overhang)						

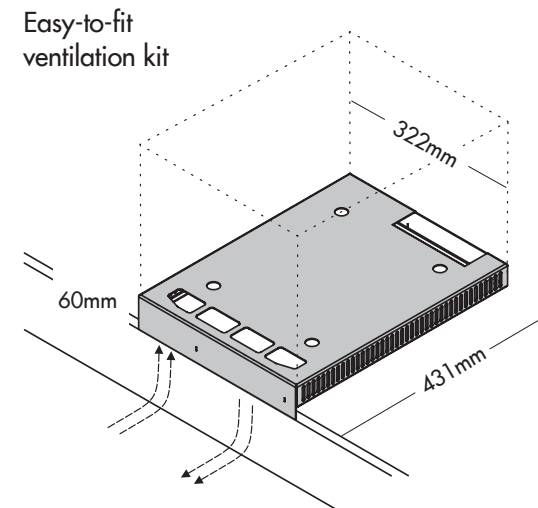

Distinctive  
by design.

## Additions for C2/C3



**Biodegradable paper cups**  
Environmentally-friendly disposable cups designed to fit Borg & Overström cup dispensers perfectly.



**Personal drinking bottles**  
500ml capacity in black. Comes with quick-release leak-proof cap and carry strap.




**500/750ml glass bottles**  
Suitable for dishwashers and bottlewashers. Both sizes are a perfect fit for the tap. Stylish swing-top lid.



**Deep Sparkle® CO<sup>2</sup> refills**  
Can be disposed via standard steel recycling or general waste. Requires CO<sup>2</sup> regulator with gauge.



**Sanitisation kit**  
Six monthly sanitising cycles ensure appliances function at the optimum hygiene levels.



**Optional drip trays**  
There is a range of integrated or freestanding stainless steel drip trays.



**Alarmed waste kit**  
Featuring an audible high-water level alarm to prevent the waste tank from overflowing.



**Install kit with 3M filter**  
Install appliances simply and effectively in a wide range of applications. Complete with a 3M filter.

Distinctive  
by design.

C2  
C3



Book a personal demonstration of the C2/C3

Talk to an adviser

+44 (0) 1362 695 006

[sales@borgandoverstrom.com](mailto:sales@borgandoverstrom.com)