
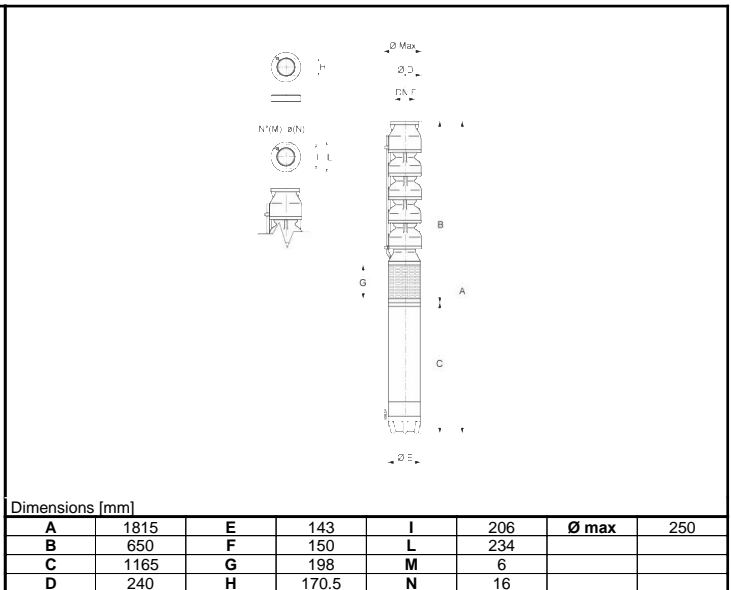


Customer:		Ref.:	
Item	Quantity	Required flow	n.d.
Type	SUBMERSIBLE ELECTRIC PUMP	Required head	n.d.
		Model	E10S64/1A+MAC640A-8V

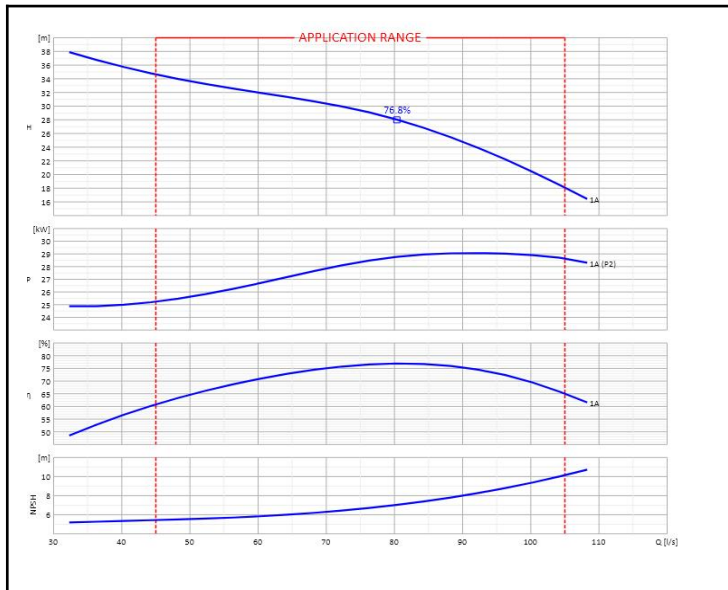

OPERATING DATA- ISO 9906:2012 3B -					CONSTRUCTION CHARACTERISTICS		
Q [l/s]	H [m]	P [kW]	η [%]	NPSH [m]			
					Delivery diameter	150	mm
					Max. overall diameter	250	mm
					Weight of electric pump	160	Kg
					No. Stages	1	
					Motor seal	Mechanical	
					Type of installation	Vertical	

OPERATING LIMITS				PUMP MATERIALS										
Pumped liquid	Water			Diffuser unit	Cast iron									
Max. temp. of pumped liquid (*)	35	°C		Suction casing	Cast iron									
Maximum density	1	kg/dm³		Impeller	Cast iron									
Maximum viscosity	1	mm²/s		Shaft	Stainless steel									
Maximum solid content	40	g/m³		Coupling	Stainless steel									
Max. number of starts/hr	20			Pump shaft bearing bush	Stainless steel/rubber									
Minimum immersion depth	625	mm		Valve casing	Cast iron									
OPERATING CHARACTERISTICS				Strainer	Stainless steel									
				Wear ring	Steel/Rubber									
Service flow rate	n.d.		n.d.		MOTOR MATERIALS									
Service head	n.d.		n.d.											
Qmin	Qmax	45	105	l/s										
H (Q=0)	Hmax (Qmin)	45.6	34.6	m		Shaft	Stainless steel							
Power consumption at duty point	n.d.			n.d.		Sand guard	Rubber							
Pump efficiency	Overall efficiency	n.d.	n.d.		n.d.		Rotor	Electrical steel						
Max. pump efficiency (B.E.P.)	76.8		n.d.		n.d.		Stator	Electrical steel						
Sense of rotation (**)	Anticlockwise			n.d.		HT HTE-TECH								
Number of pumps installed	Operating		Stand-by		n.d.					Stator shell	Stainless steel			
	1		0		n.d.					Winding	Green wire			
ELECTRIC MOTOR CHARACTERISTICS				Lower bracket	Cast iron									
				Mechanical seal	Silicon carbide/silicon carbide									
Nominal power	30		kW		Bearing	Graphite								
Rated frequency	50		Hz		Thrust-bearing	Brass/Synthetic compound								
Rated voltage	400		V		Thrust-bearing foot slip	Cast iron								
Rated current	62.5		A		Diaphragm	Rubber								
No. Poles	Nominal speed	2	2870	1/min	Diaphragm cover	Technopolymer								
Insulation class	Protection class	n.d.		IP68	Upper bracket	Cast iron								
Certified motor for use with drinking water														

OPERATING CHARACTERISTICS		MOTOR MATERIALS	
Service flow rate	n.d.	n.d.	
Service head	n.d.	n.d.	
Qmin	Qmax	45	105
H (Q=0)	Hmax (Qmin)	45.6	34.6
Power consumption at duty point	n.d.		
Pump efficiency	Overall efficiency	n.d.	n.d.
Max. pump efficiency (B.E.P.)	76.8		n.d.
Sense of rotation (**)	Anticlockwise		
Number of pumps installed	Operating		Stand-by
	1		0
ELECTRIC MOTOR CHARACTERISTICS			
Nominal power	30		kW
Rated frequency	50		Hz
Rated voltage	400		V
Rated current	62.5		A
No. Poles	Nominal speed	2	2870 1/min
Insulation class	Protection class	n.d. IP68	
Certified motor for use with drinking water			

Notes:	(*) Speed of the water outside the jacket of the motor v=0.5 m/s		
	(**) View from delivery port.		
	In case of VSD operation, refer to Use and Maintenance Instructions of the electric pump.		
OFFER No.		Pos.	Date
			16/01/2020